



**HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION
UNITS: 1C, 2E, 3B, 3C, 3D & 3E**



2800 S MacGREGOR WAY, HOUSTON, TX 77021

ISSUE FOR BID

OCTOBER 14, 2016

MEP ENGINEER

**Shah Smith and Associates
2825 S. Wilcrest Dr #350
Houston, TX 77042
p. (713) 780-7563
Firm No. F-2113**

ARCHITECT

**PBK Architects, Inc.
11 Greenway Plaza, 22nd Floor
Houston, Texas 77046
p. (713) 965-0608
Firm No. F-3709**



DRAWING INDEX

GENERAL

G0.00 COVER SHEET
G0.01 SHEET INDEX, DRAWING CONVENTIONS, AND LOCATION MAP
G0.02 ADA GUIDELINES
G0.03 SIGNAGE TYPES

ARCHITECTURAL

A1.01 COMPOSITE PLAN - FIRST FLOOR
A1.02 COMPOSITE PLAN - SECOND FLOOR
A1.03 COMPOSITE PLAN - THIRD FLOOR
A2.01C SCHEDULES - FIRST FLOOR UNIT 1C
A2.02C FIRST FLOOR UNIT 1C
A2.03C FIRST FLOOR UNIT 1C - SIGNAGE PLAN
A2.04E SCHEDULES - SECOND FLOOR UNIT 2E
A2.05E SECOND FLOOR UNIT 2E
A2.06E SECOND FLOOR UNIT 2E - SIGNAGE PLAN
A2.07B SCHEDULES - THIRD FLOOR UNIT 3B
A2.08B THIRD FLOOR UNIT 3B
A2.09B THIRD FLOOR UNIT 3B - SIGNAGE PLAN
A2.10C SCHEDULES - THIRD FLOOR UNIT 3C
A2.11C THIRD FLOOR UNIT 3C
A2.12C THIRD FLOOR UNIT 3C - SIGNAGE PLAN
A2.13D SCHEDULES - THIRD FLOOR UNIT 3D
A2.14D THIRD FLOOR UNIT 3D
A2.15D THIRD FLOOR UNIT 3D - SIGNAGE PLAN
A2.16E SCHEDULES - THIRD FLOOR UNIT 3E
A2.17E THIRD FLOOR UNIT 3E
A2.18E THIRD FLOOR UNIT 3E - SIGNAGE PLAN
A2.19C FIRST FLOOR FINISH PLAN - UNIT 1C
A2.20E SECOND FLOOR FINISH PLAN - UNIT 2E
A2.21B THIRD FLOOR FINISH PLAN - UNIT 3B
A2.22C THIRD FLOOR FINISH PLAN - UNIT 3C
A2.23D THIRD FLOOR FINISH PLAN - UNIT 3D
A2.24E THIRD FLOOR FINISH PLAN - UNIT 3E
A4.01 ENLARGED PLANS
A6.20 INTERIOR ELEVATIONS & ENLARGED PLANS PARTITION TYPES
A7.00 MILLWORK SECTIONS
A10.01 REFLECTED CEILING PLAN - UNIT 1C FIRST FLOOR
A10.02 REFLECTED CEILING PLAN - UNIT 2E SECOND FLOOR
A10.03 REFLECTED CEILING PLAN - UNIT 3B THIRD FLOOR
A10.04 REFLECTED CEILING PLAN - UNIT 3C THIRD FLOOR
A10.05 REFLECTED CEILING PLAN - UNIT 3D THIRD FLOOR
A10.06 REFLECTED CEILING PLAN - UNIT 3E THIRD FLOOR

ELECTRICAL

E0.01 ELECTRICAL LEGEND AND SYMBOLS AND ABBREVIATIONS
E0.02 LUMINAIRE SCHEDULE
E1.01C LEVEL 02 LIGHTING PLAN - AREA 1C
E1.02E LEVEL 02 LIGHTING PLAN - AREA 2E
E1.03B LEVEL 03 LIGHTING PLAN - AREA 3B
E1.03C LEVEL 03 LIGHTING PLAN - AREA 3D
E1.03D LEVEL 03 LIGHTING PLAN - AREA 3E
E1.03E LEVEL 03 LIGHTING PLAN - AREA 3C


PLUMBING

P0.01 PLUMBING LEGEND, GENERAL NOTES, AND SPECIFICATIONS
PD2.01C FIRST FLOOR PLUMBING DEMOLITION PLAN - AREA C
PD2.02E SECOND FLOOR PLUMBING DEMOLITION PLAN - AREA E
PD2.03B THIRD FLOOR PLUMBING DEMOLITION PLAN - AREA B
PD2.03C THIRD FLOOR PLUMBING DEMOLITION PLAN - AREA C
PD2.03D THIRD FLOOR PLUMBING DEMOLITION PLAN - AREA D
PD2.03E THIRD FLOOR PLUMBING DEMOLITION PLAN - AREA E
P2.01C FIRST FLOOR PLUMBING RENOVATION PLAN - AREA C
P2.02E SECOND FLOOR PLUMBING RENOVATION PLAN - AREA E
P2.03B THIRD FLOOR PLUMBING RENOVATION PLAN - AREA B
P2.03C THIRD FLOOR PLUMBING RENOVATION PLAN - AREA C
P2.03D THIRD FLOOR PLUMBING RENOVATION PLAN - AREA D
P2.03E THIRD FLOOR PLUMBING RENOVATION PLAN - AREA E

ABBREVIATIONS

A.D. AREA DRAIN	GCMU GLAZED CONCRETE MASONRY UNIT	PT. POINT
A.D.A. AMERICANS WITH DISABILITIES ACT	GEN. GENERAL	PTD. PAINTED
A.F.F. ABOVE FINISH FLOOR	GL. GLASS / GLAZING	Q.T. QUARRY TILE
A.F.G. ABOVE FINISH GRADE	GR. GRADE	R / RAD RADIUS
A.H.J. AUTHORITY HAVING JURISDICTION	GRP. GRADED	RD. ROOF DRAIN
A.I.C. AIR CONDITIONING	GTP. GLAZED TILE PAVER	RE., REF. REFER TO / REFERENCE / SEE
ACP. ACOUSTICAL PANEL	GYP. GYPSUM DRYWALL	RECP. RECEPTACLE
ACT. ACOUSTICAL TILE	H.W. HOT WATER	REINF. REINFORCE (D), (ING)
ADJ. ADJUSTABLE	HC. HANDICAPPED ACCESSIBLE	RECD. REQUIRED
ALT. ALTERNATE	HM. HOLLOW METAL FRAME	RES. RESILIENT
ALUM. ALUMINUM	HORIZ. HORIZONTAL	REV. REVISION (S), REVISED
ASPH. ASPHALT	HT. HEIGHT	RF. RECREATIONAL RESILIENT FLOORING
∠. ANGLE	I.D. INSIDE DIAMETER	RG. RELOCATABLE PAINTED GYPSUM BOARD
B.U.R. BUILT UP ROOF	I.P.S. IRON PIPE SIZE	RSS. ROD STOCK AND SEALANT
BD. BOARD	INSUL. INSULATE (ED), (ION)	S.C. SEALED CONCRETE
BLDG. BUILDING	INT. INTERIOR	S.D. SOAP DISPENSER
BLK. BLOCK	J.T. JOINT	SCHED. SCHEDULE
BM. BEAM	L.P. LIGHT POLE	SCPL. SOLID CORE PLASTIC LAMINATE
C. CHANNEL	LAM. LAMINATE (D)	SECT. SECTION
C.J. CONTROL JOINT	LAV. LAVATORY	SHT. SHEET
C.M.U. CONCRETE MASONRY UNIT	LT. LIGHT	SIM. SIMILAR
C.W. COLD WATER	LT. WT. LIGHTWEIGHT	SPC. SPECIAL COATING SYSTEM
CAB. CABINET	M.O. MASONRY OPENING	SPEC. SPECIFICATION (S)
CFMF. COLD FORMED METAL FRAMING	MAS. MASONRY	SQ. SQUARE
CL. CENTERLINE	MATL. MATERIAL (S)	SS. SOUND STRIP
CL.G. CEILING	MAX. MAXIMUM	SS. STL. STAINLESS STEEL
COL. COLUMN	MB. MARKER BOARD	STL. STEEL
COMP. COMPRESSIBLE	MECH. MECHANICAL	STRUC. STRUCTURAL
CONC. CONCRETE	MEM. MEMBRANE	SUSP. SUSPENDED
COND. CONDITION	MEM. WP. MEMBRANE WATERPROOFING	SVD. SHEET VINYL DANCE FLOORING
CORR. CORRIDOR	MEP. MECHANICAL, ELECTRICAL AND PLUMBING	SVF. SHEET VINYL FLOORING
CPT. CARPET (ED)	MEZZ. MEZZANINE	T.A.S. TEXAS ACCESSIBILITY STANDARDS
CT. CERAMIC TILE	MFR. MANUFACTURE (R)	T.B. TACK BOARD
CTSK. COUNTER SINK	MH. MANHOLE	T.D.R. TOWEL DISPENSER AND RECEPTAL
D. DRYER	MIN. MINIMUM	T.O. TOP OF
D.F. DRINKING FOUNTAIN	MISC. MISCELLANEOUS	T.O.B. TOP OF (WOOD) BLOCKING
D.P. DAMPROOFING	MOD. MODULAR	T.O.M. TOP OF MASONRY
D.S. DOWN SPOUT	MTL. METAL	T.O.S. TOP OF STEEL
DIA. DIAMETER	MTP. METAL TOILET PARTITION	T.T.D. TOILET TISSUE DISPENSER
DIM. DIMENSION	N.D. NAPKIN DISPOSAL	TEL. TELEPHONE
DTL. DETAIL	N.I.C. NOT IN CONTRACT	TERR. TERRAZZO
DWG. DRAWING	N.T.S. NOT TO SCALE	THK. THICK (NESS)
E.J. EXPANSION JOINT	N.V. NAPKIN VENDOR	TYP. TYPICAL
E.Q. EQUAL	N.O. NUMBER	U.N.O. UNLESS NOTED OTHERWISE
EA. EACH	O.C. ON CENTER (S)	UR. URINAL
EDF. ELECTRIC DRINKING FOUNTAIN	O.C.E.W. ON CENTER EACH WAY	V. VENT
EL. ELEVATION (HEIGHT)	O.D. OUTSIDE DIAMETER	V.C.T. VINYL COMPOSITION TILE
ELECT. ELECTRICAL	O.F.C.I. OWNER FURNISHED, CONTRACTOR INSTALLED	V.F. VERIFY IN FIELD
ELEV. ELEVATION (DRAWING)	O.H. OPPOSITE HAND	VENT. VENTILATING, VENTILATED
EQUIP. EQUIPMENT	OPNG. OPENING	VER. VERIFY
EXIST. EXISTING	OPP. OPPOSITE	VERT. VERTICAL
EXP. EXPANSION	P. LAM. PLASTIC LAMINATE	VGB. (PREFINISHED) VINYL CLAD GYPSUM BOARD
EXT. EXTERIOR	P.C. PRECAST	VWC. VINYL WALL COVERING
F.E. FIRE EXTINGUISHER	P.H. PAPER HOLDER	W. WASHING MACHINE
F.E.C. FIRE EXTINGUISHER CABINET	P.L. PROPERTY LINE	W.P. WATER PROOFING
F.H.C. FIRE HOSE CABINET	P.P. POWER POLE	W.S. WEATHERSTRIP
FB. FACE BRICK	P.W.B. PREFINISHED WALL BOARD	W.W. WATER WELL
FD. FLOOR DRAIN	PL. PLATE	W.W.F. WELDED WIRE FABRIC
FIN. FINISH (ED)	PLUMB. PLUMBING	WC. WATER CLOSET
FIKT. FIXTURE	PLYWD. PLYWOOD	WD. WOOD
FLOOR (ING) FLOOR (ING)	POL. POLISHED	WDW. WINDOW
FLSHG. FLASHING	PRE. PAIR	WT. WEIGHT
FLUOR. FLUORESCENT	PREFIN. PRE-FINISHED	
G.B. GRAB BAR		
G.I. GALVANIZED IRON		
GA. GAUGE		
GALV. GALVANIZED		

SITE LOCATION MAP

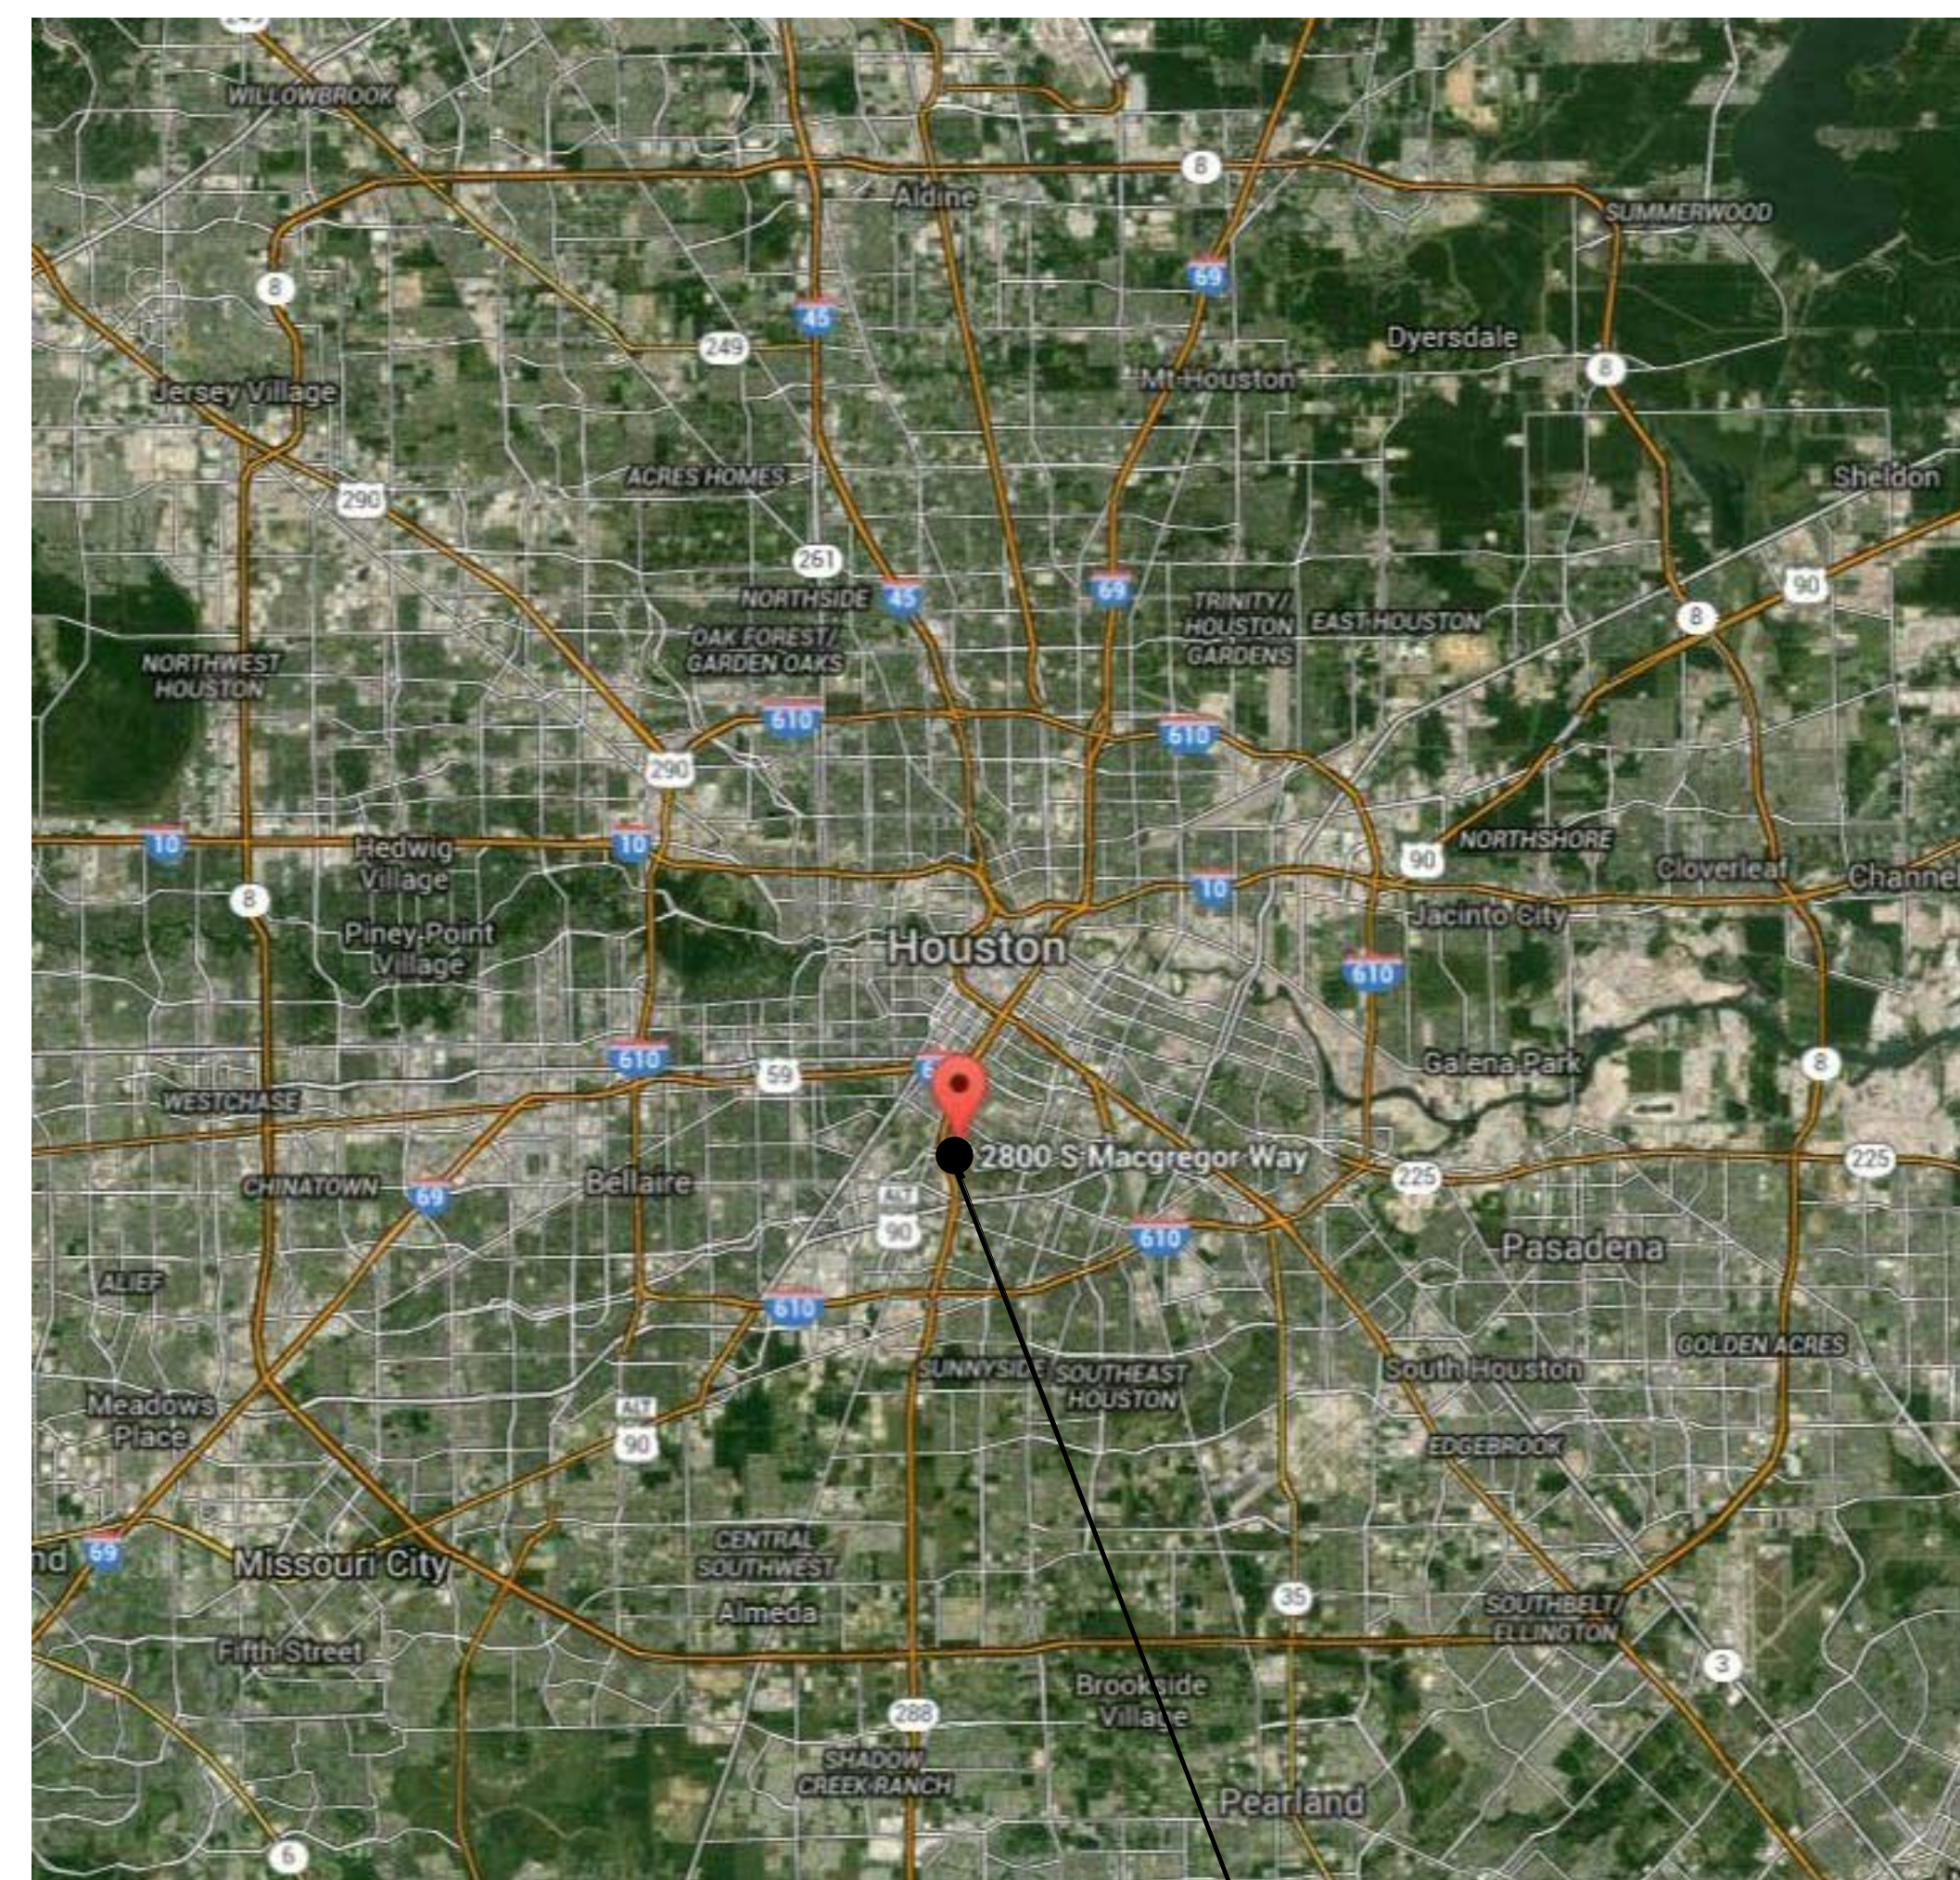

2800 S. MacGREGOR WAY
HOUSTON TX, 77021

DRAWING CONVENTIONS

PROPERTY LINE
AREA DRAIN
EXISTING ELEVATION
FINISH GRADE ELEVATION
NORTH SYMBOL
COLUMN LINE
FLOOR LINE
MATCH LINE
SECTION CALLOUT SYMBOL
EXTERIOR ELEVATION SYMBOL
INTERIOR ELEVATION SYMBOL
DOOR DESIGNATION
WINDOW DESIGNATION
PARTITION TYPE
EXISTING PARTITION
NEW PARTITION
REVISION NUMBER
DETAIL ENLARGED
PLAN OR DETAIL ENLARGED
DETAIL SECTIONS AND VERTICAL SECTIONS
DIMENSIONS
NOTE: All dimensions to face of wall unless otherwise noted.

SPOT ELEVATION
SPOT COORDINATE
MATCH LINE
SEE XXX-XXX SHEET NUMBER ON WHICH CONTINUATION IS FOUND
PROPERTY LINE
FENCING (WITH POSTS)
BREAK LINE
KEY NOTE
ROOM NAME AND NUMBER
FIRE HOSE CABINET (RECESSED AND SURFACE MOUNTED)
FIRE EXTINGUISHER CABINET (RECESSED AND SURFACE MOUNTED)
EQUIPMENT DESIGNATION
TOILET ACCESSORY SYMBOL
SHOWER HEAD
FLOOR SINK
FLOOR DRAIN
OVERFLOW DRAIN AND ROOF DRAIN
OVERFLOW DRAIN
ROOF DRAIN
ROOF TOP UNIT REFER TO MECHANICAL FOR TYPE

GRAPHIC SCALE
SCALE: 1" = 4'-0"

MATERIALS CONVENTIONS

02 SITE CONSTRUCTION	06 WOODS AND PLASTICS
EARTH (EXISTING)	CONTINUOUS WOOD
EARTH (BACKFILL)	INTERMITTENT WOOD
DRAINAGE FILL	FINISH WOOD
03 CONCRETE	MEDIUM DENSITY FIBER BOARD (MDF)
CAST-IN-PLACE CONCRETE	PARTICLE BOARD
PRECAST CONCRETE	PLYWOOD
04 MASONRY	SOLID SURFACE MATERIAL
BRICK	07 THERMAL & MOISTURE PROTECTION
CONCRETE MASONRY UNITS	BATT INSULATION
STONE	LOOSE FILL INSULATION
CAST STONE	RIGID INSULATION
GROUT	08 GLAZING
05 METALS	GLASS
ALUMINUM	09 FINISHES
STEEL	LATH AND PLASTER
	GYPSUM BOARD

SHEET NUMBERING


SHEET NUMBER **A2.01A** BUILDING AREA

SEQUENCE (01 - 99... etc.)


SHEET DISCIPLINE TYPE

DISCIPLINE
G - GENERAL (Cover, AD Sheets)
C - CIVIL
L - LANDSCAPE
D - DEMO
A - ARCHITECTURAL
S - STRUCTURAL
I - INTERIORS
M - MECHANICAL
E - ELECTRICAL
P - PLUMBING
T - TECHNOLOGY

0 - GENERAL
1 - SITE PLANS & DETAILS
2 - FLOOR PLANS (Note: Flip Sheets are Schedules)
3 - ROOF
4 - ADA & ENLARGED PLANS
5 - PLAN DETAILS
6 - EXTERIOR/INTERIOR ELEVATIONS
7 - PARTITION TYPES & WALL SECTIONS
8 - CASEWORK ELEVATIONS
9 - WINDOWS, DOORS, FRAME ELEVATIONS & DETAILS
10 - REFLECTED CEILING PLANS & DETAILS

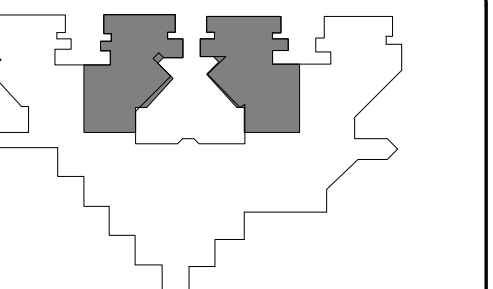

KEY PLAN PLAN TRUE NORTH TRUE NORTH

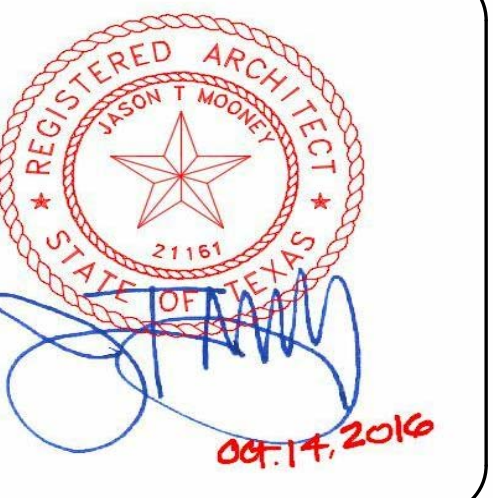

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
ADA GUIDELINES



TOILET ACCESSORIES		
LABEL	DESCRIPTION	REMARKS
TA1	SOAP DISPENSER	NOT USED
TA2	24" X 48" MIRROR	
TA3	RECESSED TOILET PAPER DISPENSER	
TA4	RECESSED PAPER TOWEL DISPENSER	
TA5	GRAB BARS AT TYPICAL H.C. TOILET STALL	
TA6	SANITARY NAPKIN DISPENSER	NOT USED
TA7	SANITARY NAPKIN DISPOSAL	NOT USED
TA8	MOP & BROOM HOLDER	NOT USED
TA9	GRAB BARS AT ACCESSIBLE SHOWER	
TA10	FOLDING SHOWER BENCH	NOT USED
TA11	CLOTHES HOOK	
TA12	SHOWER CURTAIN, TRACK AND HOOKS	
TA13	ELECTRIC HAND DRYER	NOT USED
TA14	COMBO PAPER TOWEL DISPENSER/TRASH RECEPTACLE	NOT USED
TA15	GRAB BARS AT ALTERNATE ACCESSIBLE TOILET STALL	NOT USED
TA16	CHANGING STATION	NOT USED
TA17	TRASH RECEPTACLE	NOT USED

NOTE: ALL TOILET ACCESSORIES SHALL BE CONTRACTOR FURNISHED AND INSTALLED UNLESS NOTED OTHERWISE

- COORDINATE FINAL LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION.
- CONTRACTOR IS TO VERIFY ALL HEIGHTS OF ACCESSORIES TO COMPLY WITH ADA.
- REFER TO ALL FINISHES AND COLORS IN FINISH SCHEDULE. VERIFY ALL PATTERNS WITH ARCHITECT.
- ALIGN MIRROR ON CENTER OF LAVATORY.
- ONE HOOK INSIDE DOOR AT SINGLE TOILET ROOMS AND ONE HOOK AT EACH SHOWER.

DESCRIPTION	Ages: ADULT
WATER CLOSET: To Top of Seat	17"-19"
Grab Bars:	33"-36"
URINAL: Max. to Rim of Basin	17"
LAVATORIES:	
Frontal Approach:	
Min. Knee Clearance	29"
Max. To Top	34"
Side Approach:	
Max. To Top	34"
FIXED OR BUILT-IN:	
Height of Tables or Counter:	28"-34"
Knee Clearance: Max.	27"
Shelves & Dispensers: Max. Height to Control Device	
Frontal Approach: Max.	48"
Side Approach: Max.	54"
DRINKING FOUNTAINS:	
Max. to Spout	36"
Knee Clearance: Min.	27"
SWITCHES AND CONTROLS	
Frontal Approach - Max.	48"
Side Approach - Max.	54"
MIRROR (to bottom of reflective surface - max.)	40" max.
TOILET PAPER DISPENSER (to Center of Roll)	19"
PAPER TOWEL DISPENSER (to Operating Mechanism)	48"
SHOWER	
Top of Seat	17"-19"
Grab Bar	33"-36"
Max. to Hand Shower Head Mounting	48"
CHALKBOARDS/TACKBOARDS	COORDINATE WITH OWNER PRIOR TO INSTALLATION TO ESTABLISH MOUNTING HGT.

NOTE: ACCESSORIES, FIXTURES, AND DEVICES LISTED HERE ARE INTENDED TO BE REPRESENTATIVE OF ALL POSSIBLE CONDITIONS. NOT ALL CONDITIONS APPLY TO THIS PROJECT. REFER TO PLANS AND ELEVATIONS FOR PROJECT-SPECIFIC CONDITIONS.

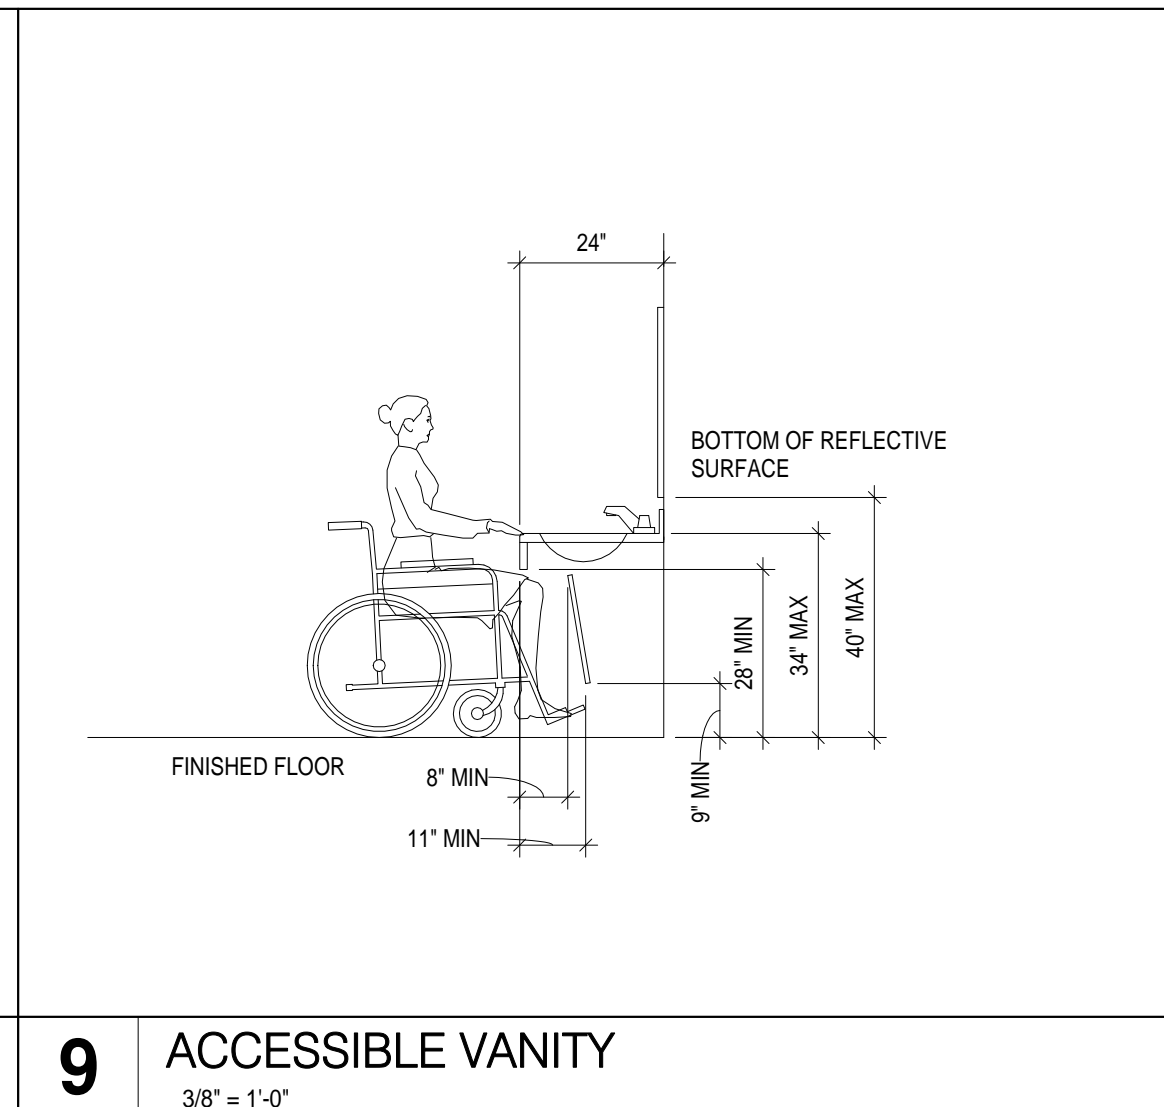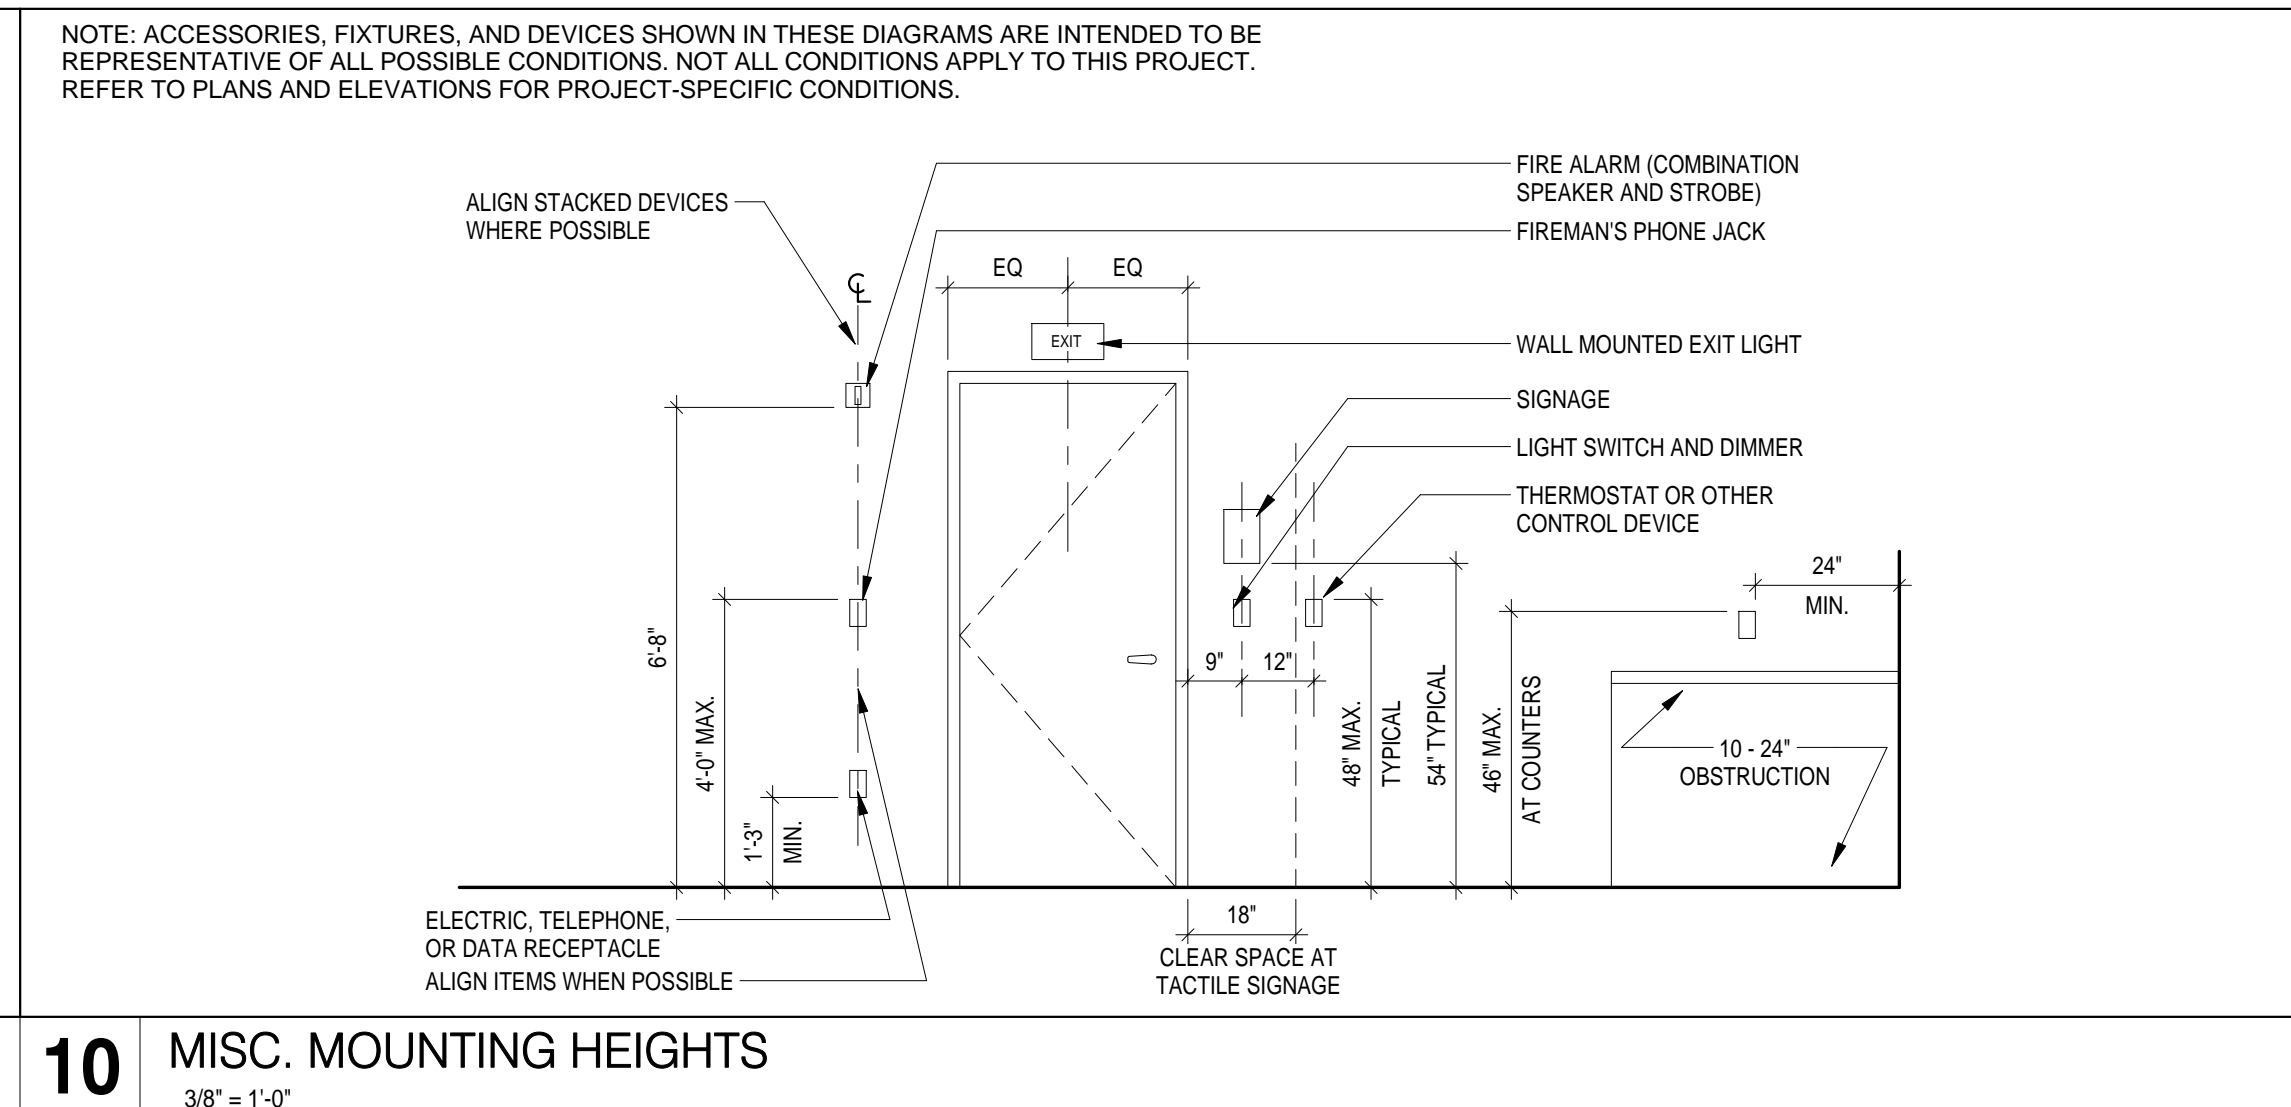


10 MISC. MOUNTING HEIGHTS
 3/8" = 1'-0"

9 ACCESSIBLE VANITY
 3/8" = 1'-0"


NOTE: ACCESSORIES, FIXTURES, AND DEVICES SHOWN IN THESE DIAGRAMS ARE INTENDED TO BE REPRESENTATIVE OF ALL POSSIBLE CONDITIONS. NOT ALL CONDITIONS APPLY TO THIS PROJECT. REFER TO PLANS AND ELEVATIONS FOR PROJECT-SPECIFIC CONDITIONS.

NOTE: ALL FIXTURE SIZES, MOUNTING HEIGHTS, AND CLEARANCES MUST ABIDE BY THE TEXAS ACCESSIBILITY STANDARDS.

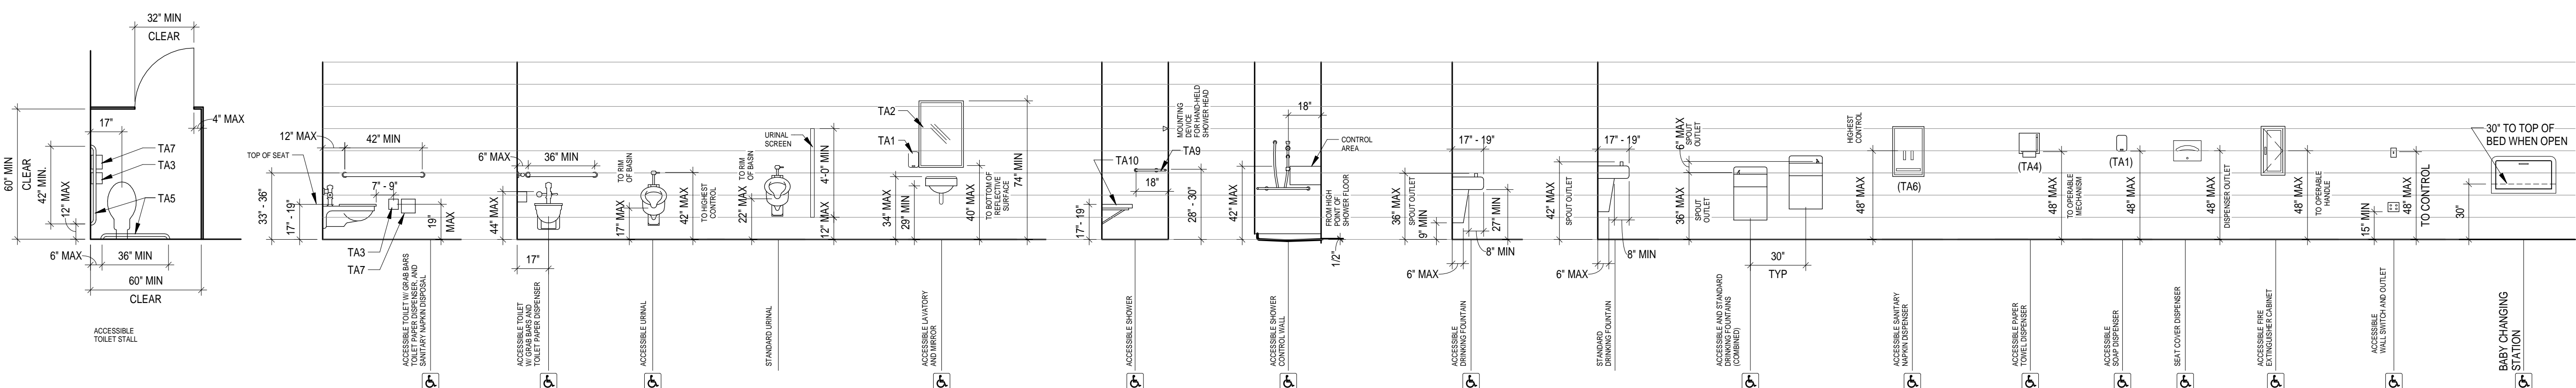

6 ADA STANDARDS
 1/4" = 1'-0"

**HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATION UNITS: 1C,
2E, 3B, 3C, 3D & 3E**

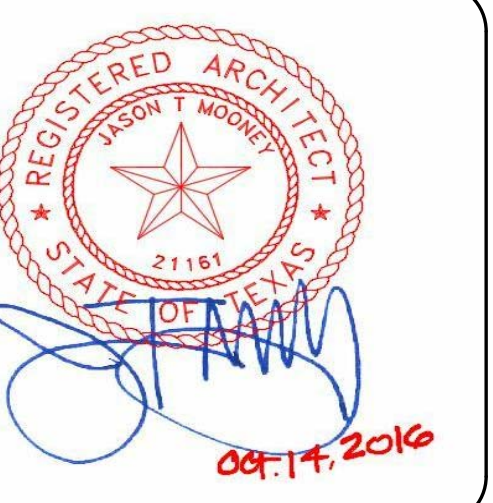


CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VICTORIA GARCIA	
CHECKED BY:	JASON MOONEY	
REVISIONS		
No.	Description	Date

ISSUE FOR BID

SIGNAGE TYPES

G0.03

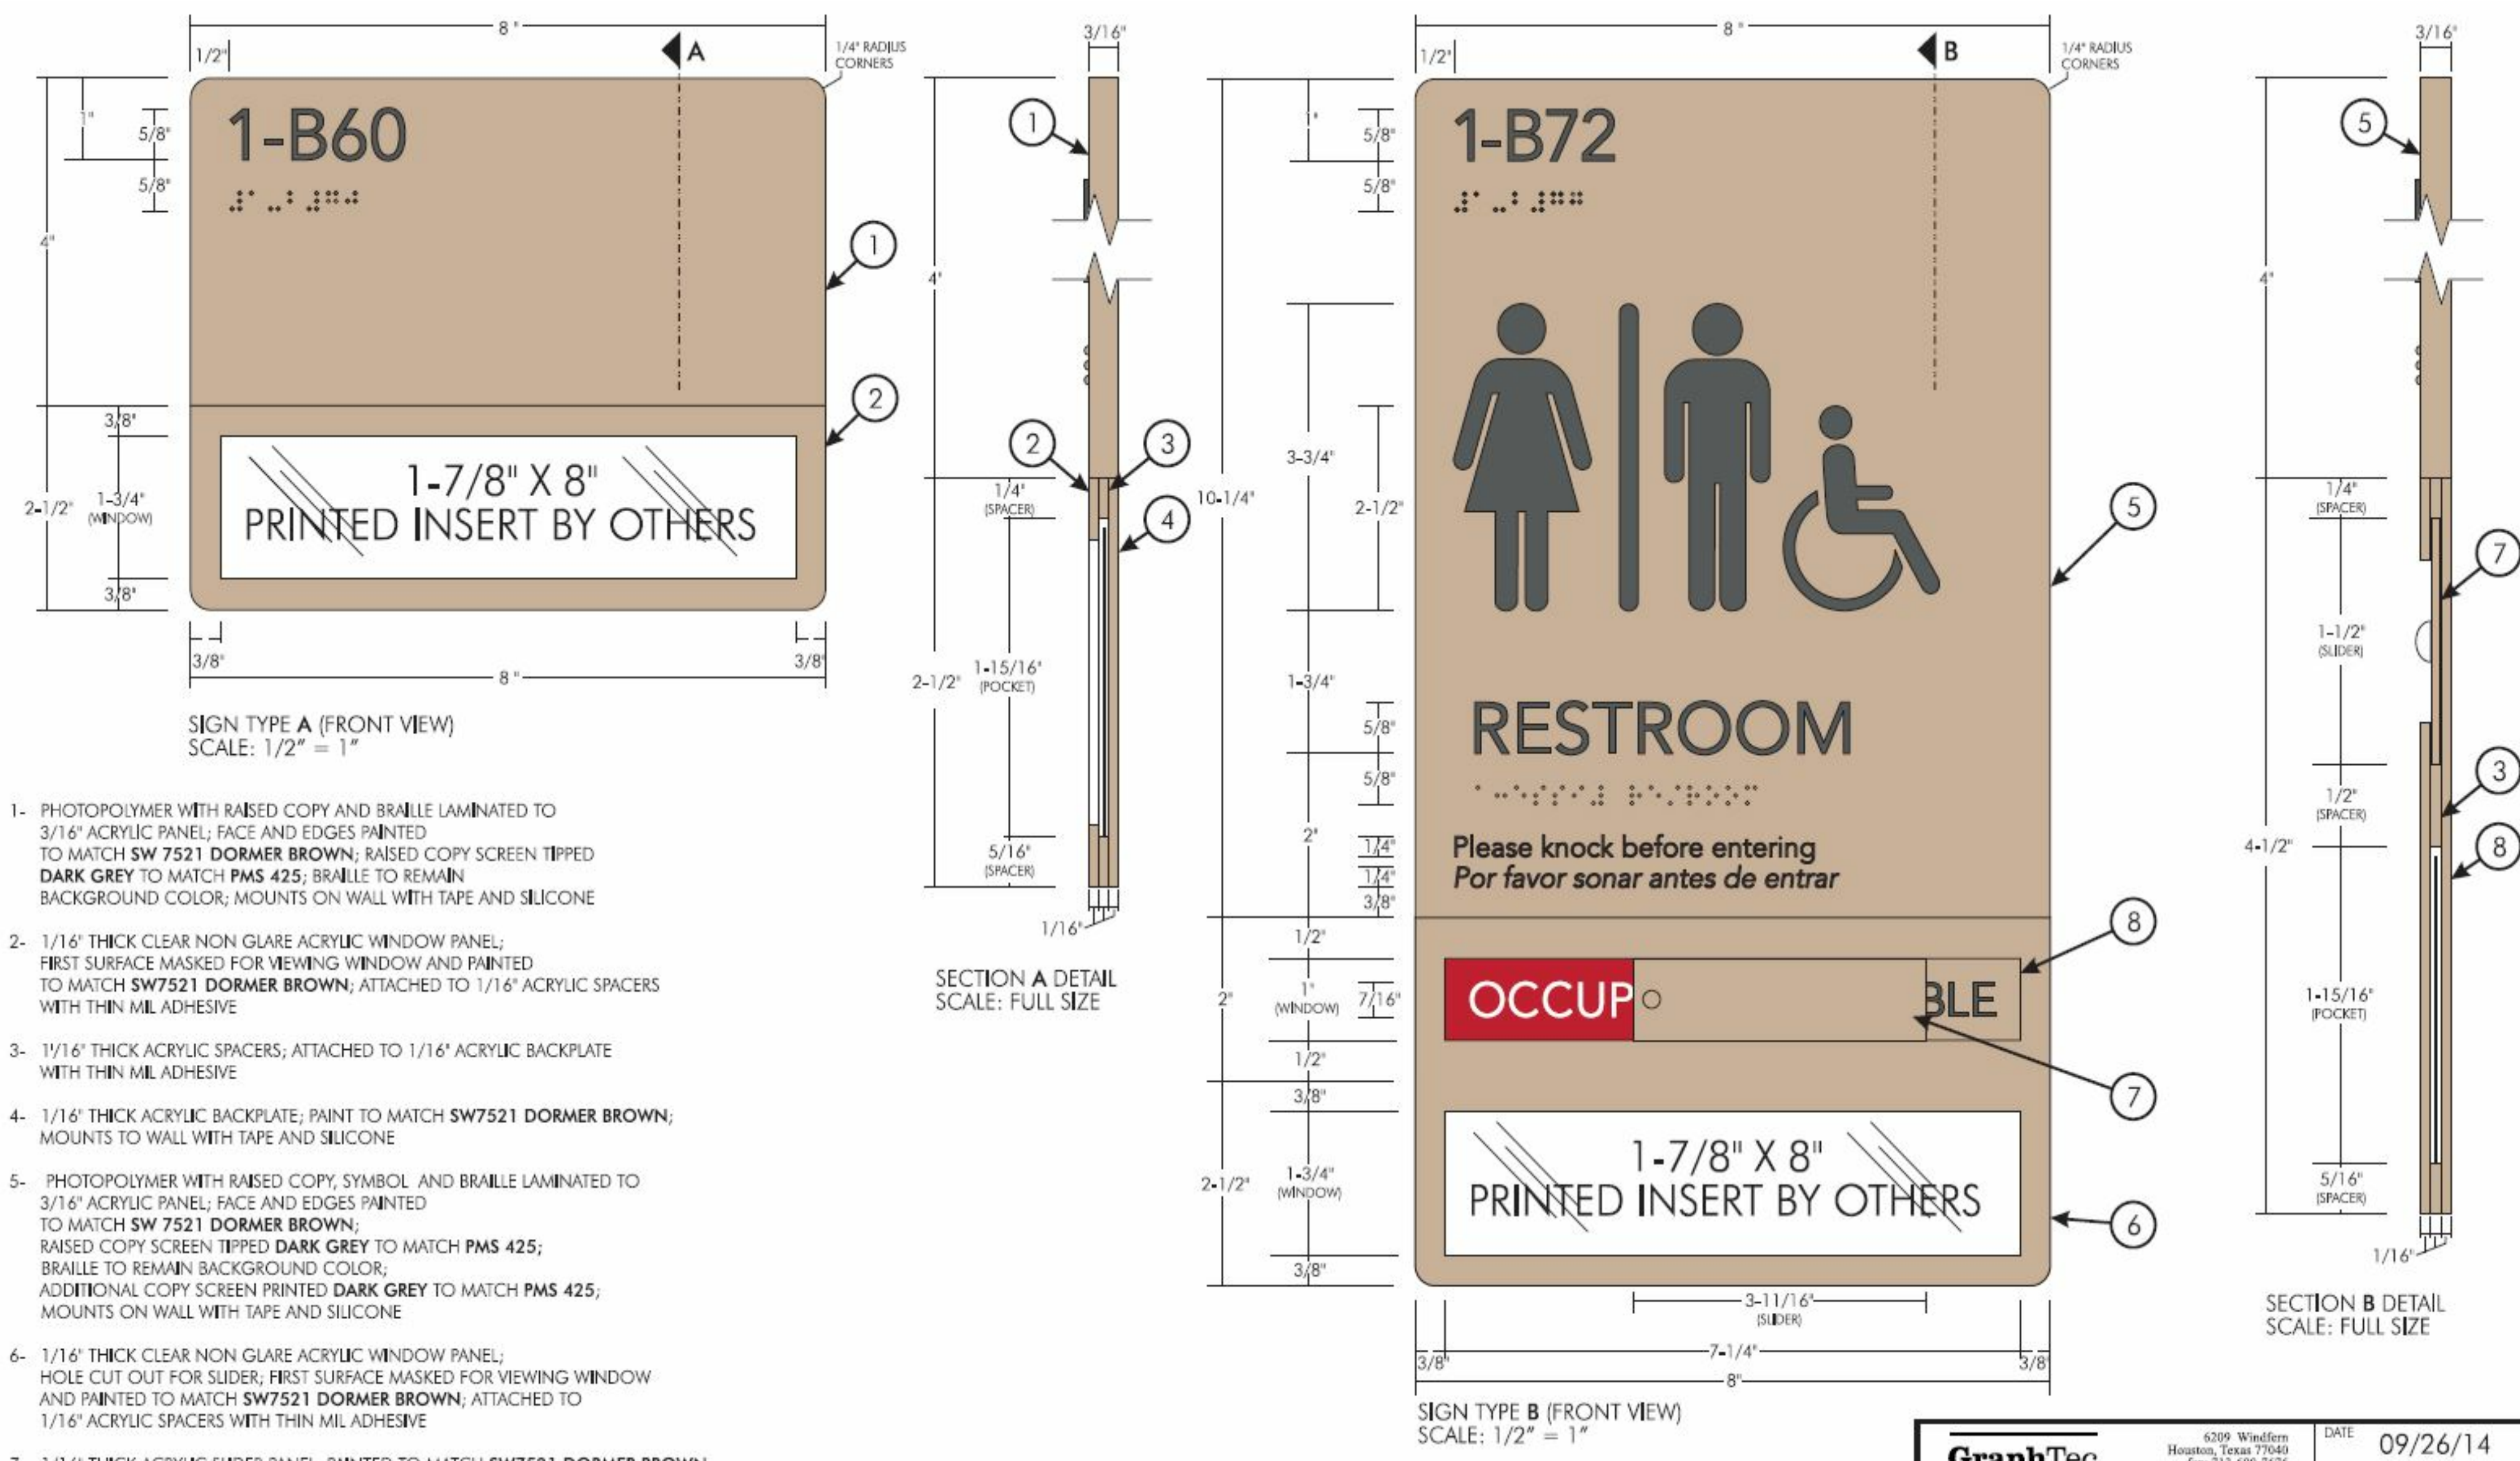


- PHOTOPOLYMER WITH RAISED COPY AND BRAILLE LAMINATED TO 3/16" ACRYLIC PANEL; FACE AND EDGES PAINTED TO MATCH SW 7521 DORMER BROWN; RAISED COPY SCREEN TIPPED DARK GREY TO MATCH PMS 425; BRAILLE TO REMAIN BACKGROUND COLOR; MOUNTS ON WALL WITH TAPE AND SILICONE
- 1/16" THICK CLEAR NON GLARE ACRYLIC WINDOW PANEL; FIRST SURFACE MASKED FOR VIEWING WINDOW AND PAINTED TO MATCH SW7521 DORMER BROWN; ATTACHED TO 1/16" ACRYLIC SPACERS WITH THIN MIL ADHESIVE
- 1/16" THICK ACRYLIC SPACERS; ATTACHED TO 1/16" ACRYLIC BACKPLATE WITH THIN MIL ADHESIVE
- 1/16" THICK ACRYLIC BACKPLATE; PAINT TO MATCH SW7521 DORMER BROWN; MOUNTS TO WALL WITH TAPE AND SILICONE
- PHOTOPOLYMER WITH RAISED COPY, SYMBOL AND BRAILLE LAMINATED TO 3/16" ACRYLIC PANEL; FACE AND EDGES PAINTED TO MATCH SW 7521 DORMER BROWN; RAISED COPY SCREEN TIPPED DARK GREY TO MATCH PMS 425; BRAILLE TO REMAIN BACKGROUND COLOR; ADDITIONAL COPY SCREEN PRINTED DARK GREY TO MATCH PMS 425; MOUNTS ON WALL WITH TAPE AND SILICONE
- 1/16" THICK CLEAR NON GLARE ACRYLIC WINDOW PANEL; HOLE CUT OUT FOR SLIDER; FIRST SURFACE MASKED FOR VIEWING WINDOW AND PAINTED TO MATCH SW7521 DORMER BROWN; ATTACHED TO 1/16" ACRYLIC SPACERS WITH THIN MIL ADHESIVE
- 1/16" THICK ACRYLIC SLIDER PANEL; PAINTED TO MATCH SW7521 DORMER BROWN; CLEAR ACRYLIC 'FULL' GLUED TO FACE
- 1/16" THICK ACRYLIC BACKPLATE; PAINT TO MATCH SW7521 DORMER BROWN; SECTION MASKED AND SPRAYED RED FOR SLIDER; TEXT COPY SCREEN PRINTED IN TWO COLORS; 'OCCUPIED' COPY SCREEN PRINTED WHITE ON RED SECTION OF BACKPLATE; 'AVAILABLE' COPY SCREEN PRINTED DARK GREY TO MATCH PMS 425; MOUNTS TO WALL WITH TAPE AND SILICONE

<input type="radio"/> Approved	Job#	G0813
<input type="radio"/> Approved as Noted		
<input type="radio"/> Not Approved	Date Sent	10-30-14
By		
Date		

GraphTec	6209 Westlawn Houston, Texas 77045 fax: 713-965-0755 phone: 713-966-9999 sgm@graphtecinc.com	DATE	09/26/14
		REVISED	10/30/14
UT Health Harris County Psychiatric Center		DRAWN BY	JCW
Sign Types A and B		SCALE	AS SHOWN
		DRAWING NUMBER	G4586-14 R1

NOTE: SIGNAGE TYPES FOR REFERENCE ONLY

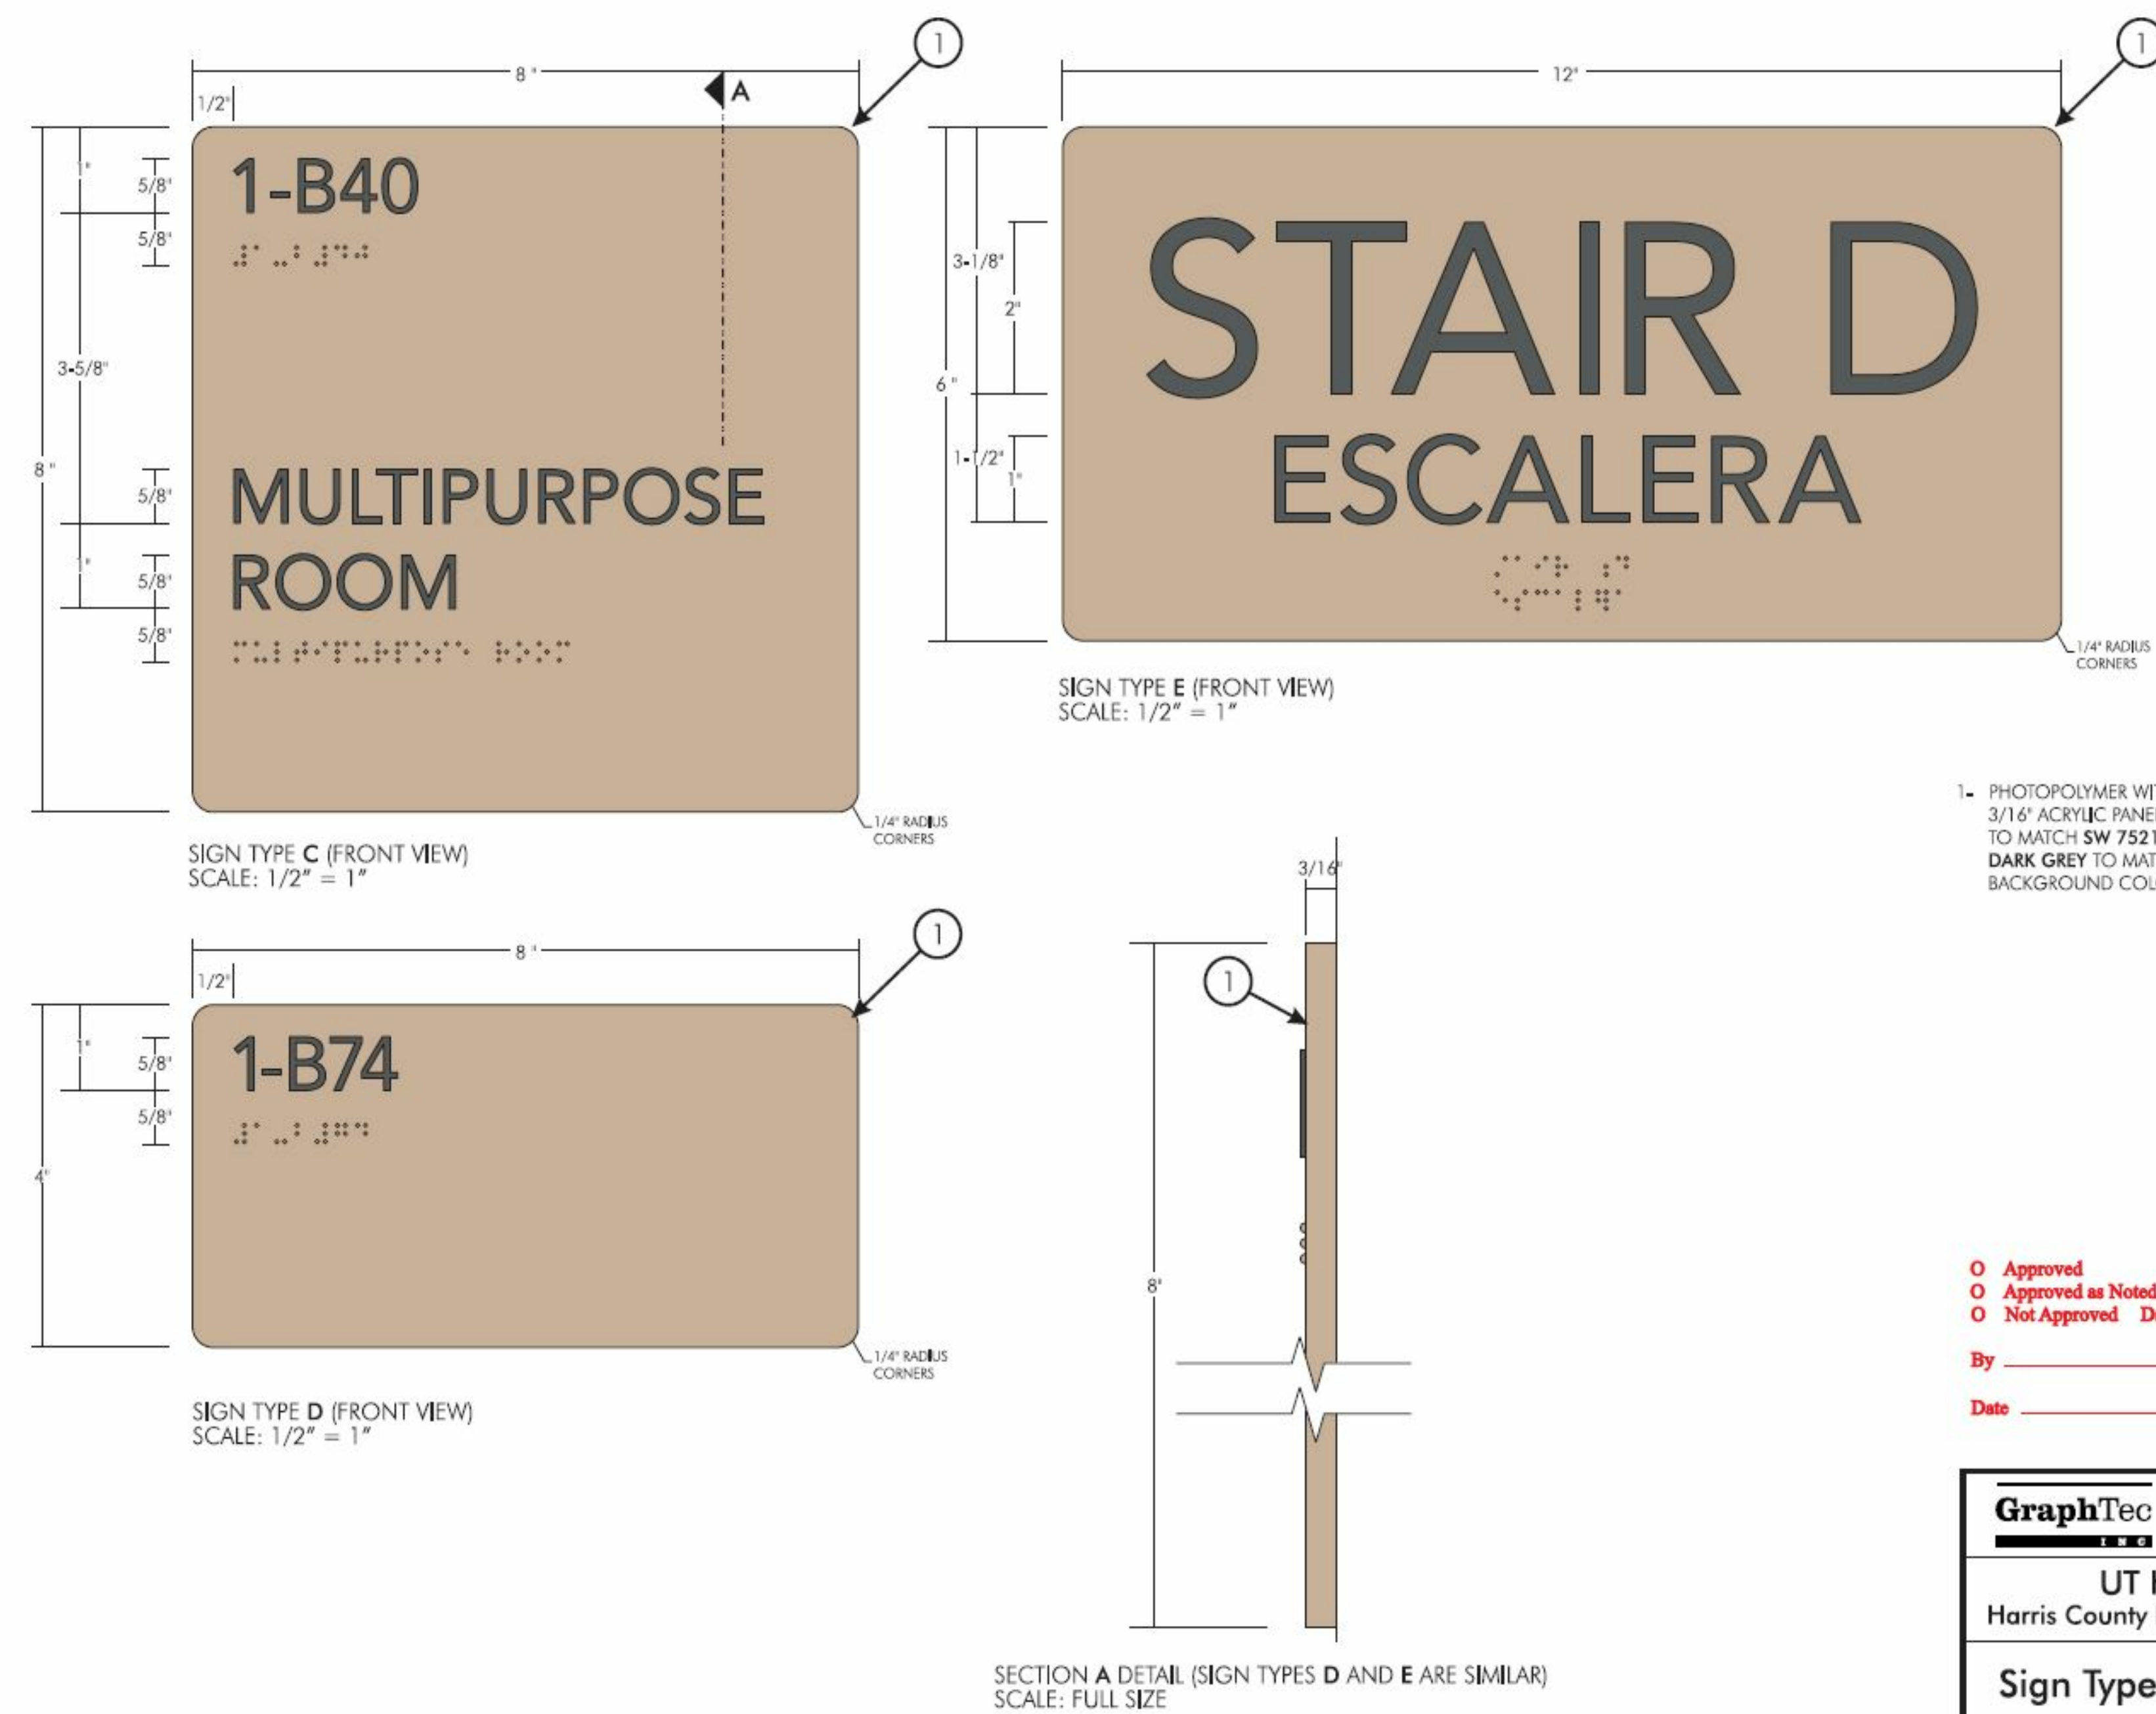



- PHOTOPOLYMER WITH RAISED COPY AND BRAILLE LAMINATED TO 3/16" ACRYLIC PANEL; FACE AND EDGES PAINTED TO MATCH SW 7521 DORMER BROWN; RAISED COPY SCREEN TIPPED DARK GREY TO MATCH PMS 425; BRAILLE TO REMAIN BACKGROUND COLOR; MOUNTS ON WALL WITH TAPE AND SILICONE

<input type="radio"/> Approved	Job#	G0813
<input type="radio"/> Approved as Noted		
<input type="radio"/> Not Approved	Date Sent	10-30-14
By		
Date		

GraphTec	6209 Westlawn Houston, Texas 77045 fax: 713-965-0755 phone: 713-966-9999 sgm@graphtecinc.com	DATE	09/26/14
		REVISED	10/30/14
UT Health Harris County Psychiatric Center		DRAWN BY	JCW
Sign Type C, D and E		SCALE	AS SHOWN
		DRAWING NUMBER	G4589-14 R1

NOTE: SIGNAGE TYPES FOR REFERENCE ONLY

HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATION UNITS: 1C,
2E, 3B, 3C, 3D & 3E

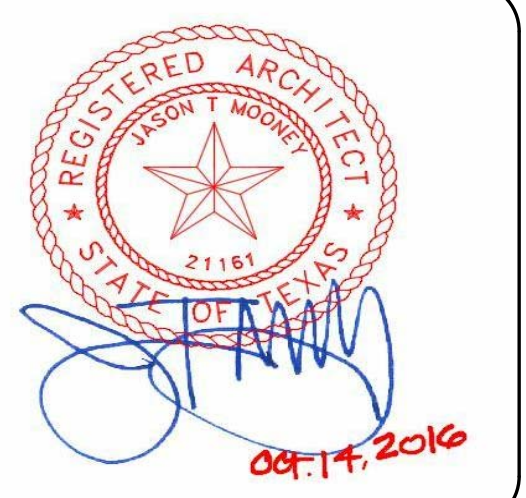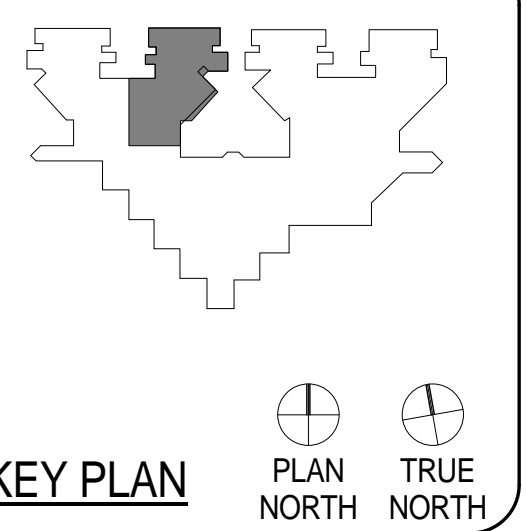


CLIENT		
UT HEALTH		
PROJECT NUMBER		
16106		
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**COMPOSITE PLAN -
FIRST FLOOR**

A1.01

PROJECT GENERAL INFORMATION	
Name of Project	HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS 1C, 2E, 3B, 3C, 3D, & 3E
Building/ Facility Name:	HARRIS COUNTY PSYCHIATRIC CENTER
Location/ Address:	2800 S. MaGREGOR WAY, HOUSTON, TX 77021
Description of Project:	INTERIOR RENOVATION OF EXISTING PATIENT UNITS
Applicable Building Codes :	N/A
Accessibility	2012 TEXAS ACCESSIBILITY STANDARDS
Overall Type of Construction:	TYPE EXISTING I-B
Mixed Type of Construction:	N/A
Occupancy Classification(s):	I-2
Overall Use of Building:	PSYCHIATRIC FACILITY
High Rise Building:	N/A
Automatic Fire Sprinkler System :	YES (EXISTING)
Type of Automatic Fire Sprinkler System:	EXISTING; RE: MEP DRAWINGS
Standpipe System	RE: MEP DRAWINGS
Active Fire Safety Systems:	EXISTING
Maximum Common Path (A-2 & A-3/ B w/ sprinkler) :	100 FT (I-2 OCCUPANCY WITHIN CARE SUITE)
Maximum Exit Distance (A-2 & A-3/ B w/ sprinkler) :	200 FT
Corridor Fire Resistance Rating	0 HRS (MUST BE SMOKE TIGHT)
Corridor Width	8 FT (WHERE REQUIRED FOR BED MOVEMENT) OR AS SHOWN 96 INCHES



ALLOWABLE HEIGHTS AND AREAS	
Occupancy Classification	I-2
Allowable Height Stories (w/ sprinkler increase)	5
Allowable Height in Feet (w/ sprinkler increase)	180
Allowable Area (SF)	UL
Frontage Increase (###%) (SF)	N/A
Sprinkler Increase (###%) (SF)	N/A
Total Allowable Area per Story (SF)	UL

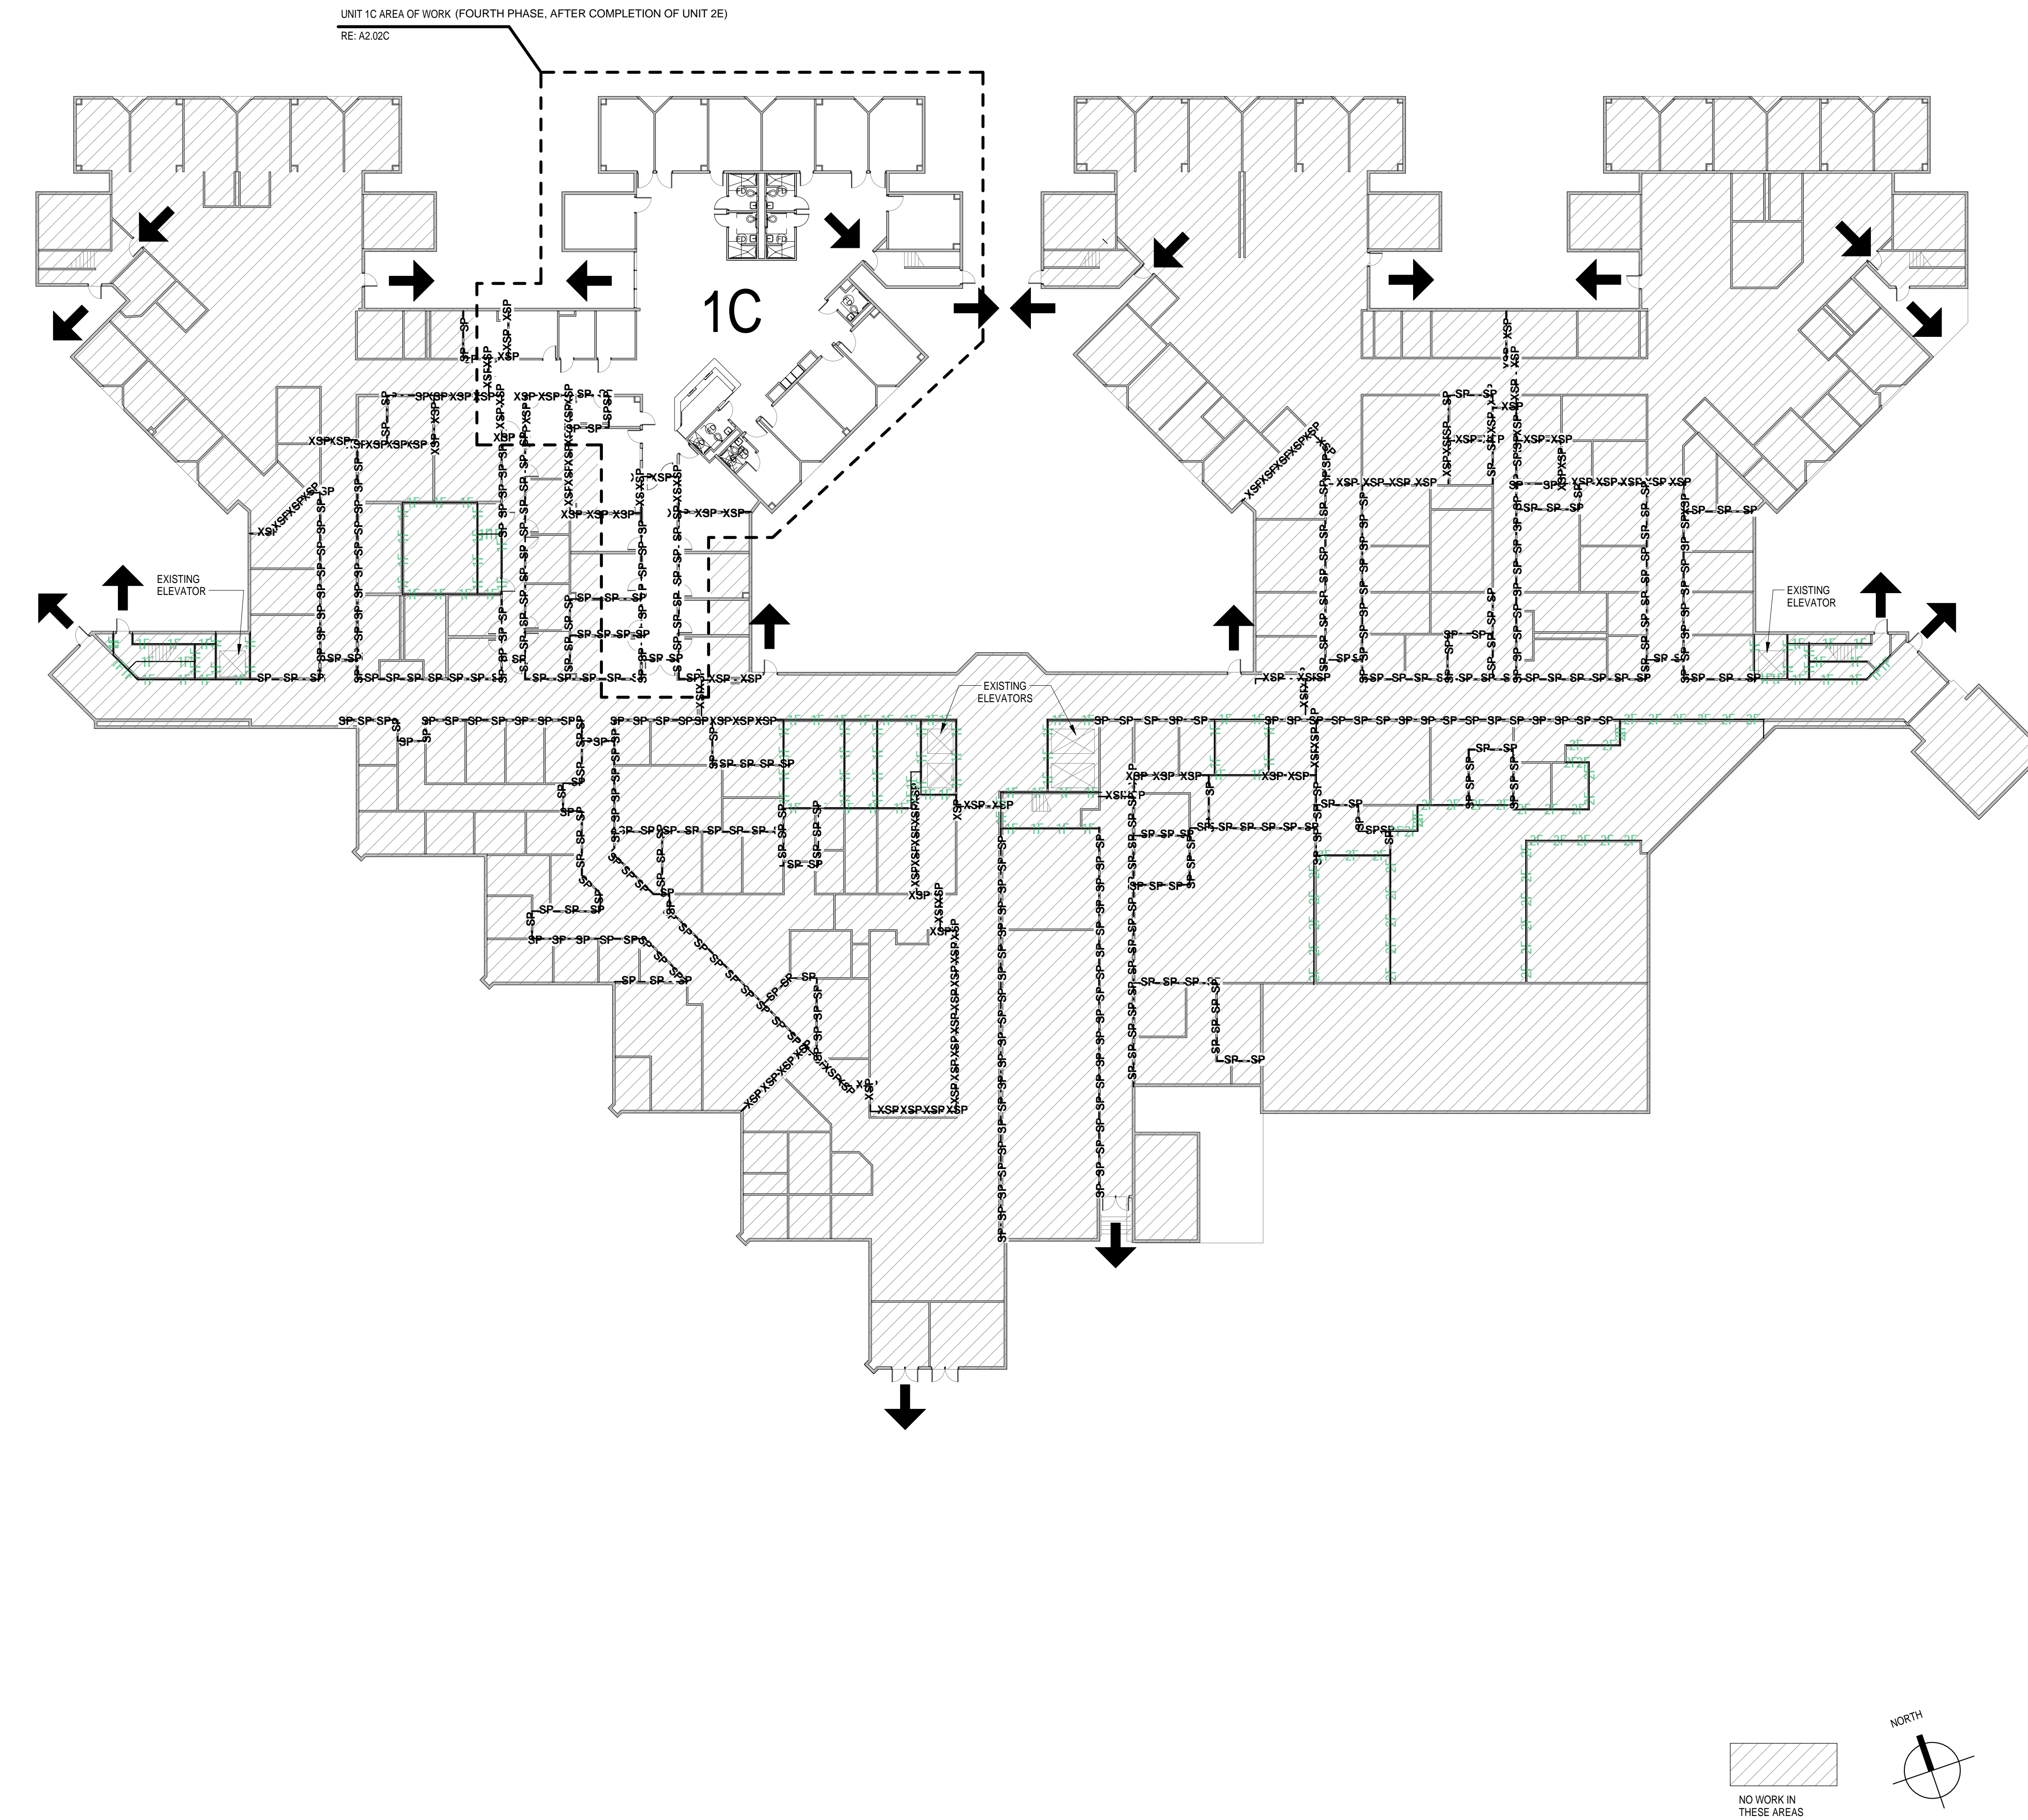

LIFE SAFETY LEGEND

- XSP - XSP - XSP - EXISTING SMOKE PARTITION
- SP - SP - SP - EXISTING SMOKE PARTITION (SP)
- SB - SB - SB - EXISTING SMOKE BARRIER (SB) / 30min
- F - F - F - EXISTING FIRE BARRIER (F) / 1hr
- F - F - F - EXISTING FIRE BARRIER (F) / 2hr
- F - F - F - EXISTING FIRE BARRIER (F) / 3hr
- EXISTING PARTITION
- NEW PARTITION
- ➔ EXISTING EXIT LOCATION
- ④ FIRE RATING OF DOOR IN MINUTES
- FEC EXISTING FIRE EXTINGUISHER CABINET
- FE EXISTING FIRE EXTINGUISHER
- EXIT LIGHT FIXTURE W/ DIRECTION, SOLID FILL DENOTES FACE OF EXIT FIXTURE
- ➔ LONGEST ROUTE TO AN EXIT
- MHO MAGNETIC HOLD OPEN

HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATION UNITS: 1C,
2E, 3B, 3C, 3D & 3E

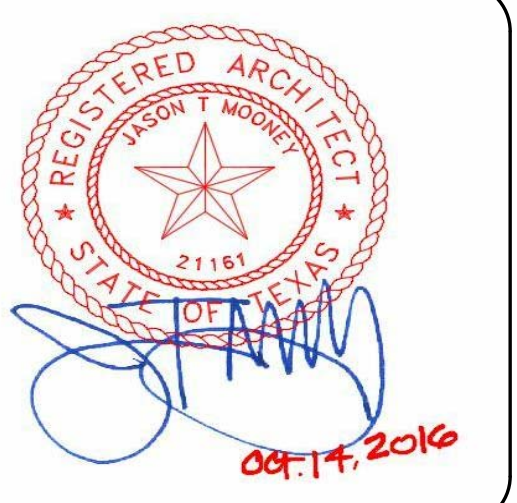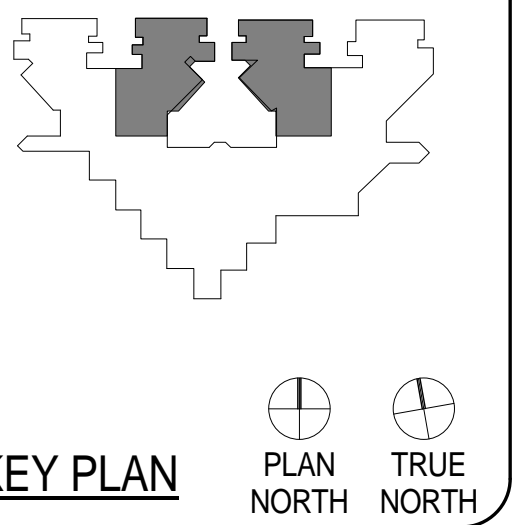

CLIENT UT HEALTH		
PROJECT NUMBER 16106		
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**COMPOSITE PLAN -
SECOND FLOOR**

A1.02


PROJECT GENERAL INFORMATION	
Name of Project	HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS 1C, 2E, 3B, 3C, 3D, & 3E
Building/ Facility Name:	HARRIS COUNTY PSYCHIATRIC CENTER
Location/ Address:	2800 S. MARGREGOR WAY, HOUSTON, TX 77021
Description of Project:	INTERIOR RENOVATION OF EXISTING PATIENT UNITS
Applicable Building Codes :	N/A
Accessibility	2012 TEXAS ACCESSIBILITY STANDARDS
Overall Type of Construction:	TYPE EXISTING I-B
Mixed Type of Construction:	N/A
Occupancy Classification(s):	I-2
Overall Use of Building:	PSYCHIATRIC FACILITY
High Rise Building:	N/A
Automatic Fire Sprinkler System :	YES (EXISTING)
Type of Automatic Fire Sprinkler System :	EXISTING, RE: MEP DRAWINGS
Standpipe System	RE: MEP DRAWINGS
Active Fire Safety Systems:	EXISTING
Maximum Common Path (A-2 & A-3/ B w/ sprinkler) :	100 FT (I-2 OCCUPANCY WITHIN CARE SUITE)
Maximum Exit Distance (A-2 & A-3/ B w/ sprinkler) :	200 FT
Corridor Fire Resistance Rating	0 HRS (MUST BE SMOKE TIGHT)
Corridor Width	8 FT (WHERE REQUIRED FOR BED MOVEMENT) OR AS SHOWN 96 INCHES

OCCUPANT INFORMATION							
Query (Occupants)	Number of Occupants	Egress Stair Width (in.)		Exits		Egress Door Width (in.)	
		Required (.2')	Provided	Required	Provided	Required	Provided
First Floor							
Second Floor							
Third Floor							


ALLOWABLE HEIGHTS AND AREAS			
Occupancy Classification	I-2		
Allowable Height Stories (w/ sprinkler increase)	5		
Allowable Height in Feet (w/ sprinkler increase)	180		
Allowable Area (SF)	UL		
Frontage Increase (###%) (SF)	N/A		
Sprinkler Increase (###%) (SF)	N/A		
Total Allowable Area per Story (SF)	UL		

LIFE SAFETY LEGEND



- EXISTING SMOKE PARTITION
- EXISTING SMOKE PARTITION (SP)
- EXISTING SMOKE BARRIER (SB) / 30min
- EXISTING FIRE BARRIER (F) / 1hr
- EXISTING FIRE BARRIER (F) / 2hr
- EXISTING FIRE BARRIER (F) / 3hr
- EXISTING PARTITION
- NEW PARTITION
- EXISTING EXIT LOCATION
- FIRE RATING OF DOOR IN MINUTES
- EXISTING FIRE EXTINGUISHER CABINET
- EXISTING FIRE EXTINGUISHER
- EXIT LIGHT FIXTURE W/ DIRECTION, SOLID FILL DENOTES FACE OF EXIT FIXTURE
- LONGEST ROUTE TO AN EXIT
- MAGNETIC HOLD OPEN

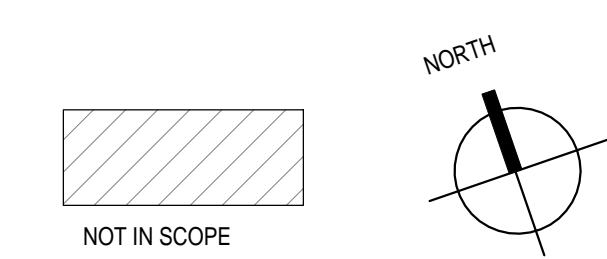

UNIT 2E AREA OF WORK (THIRD PHASE, AFTER COMPLETION OF UNIT 3E)
RE: A2.05

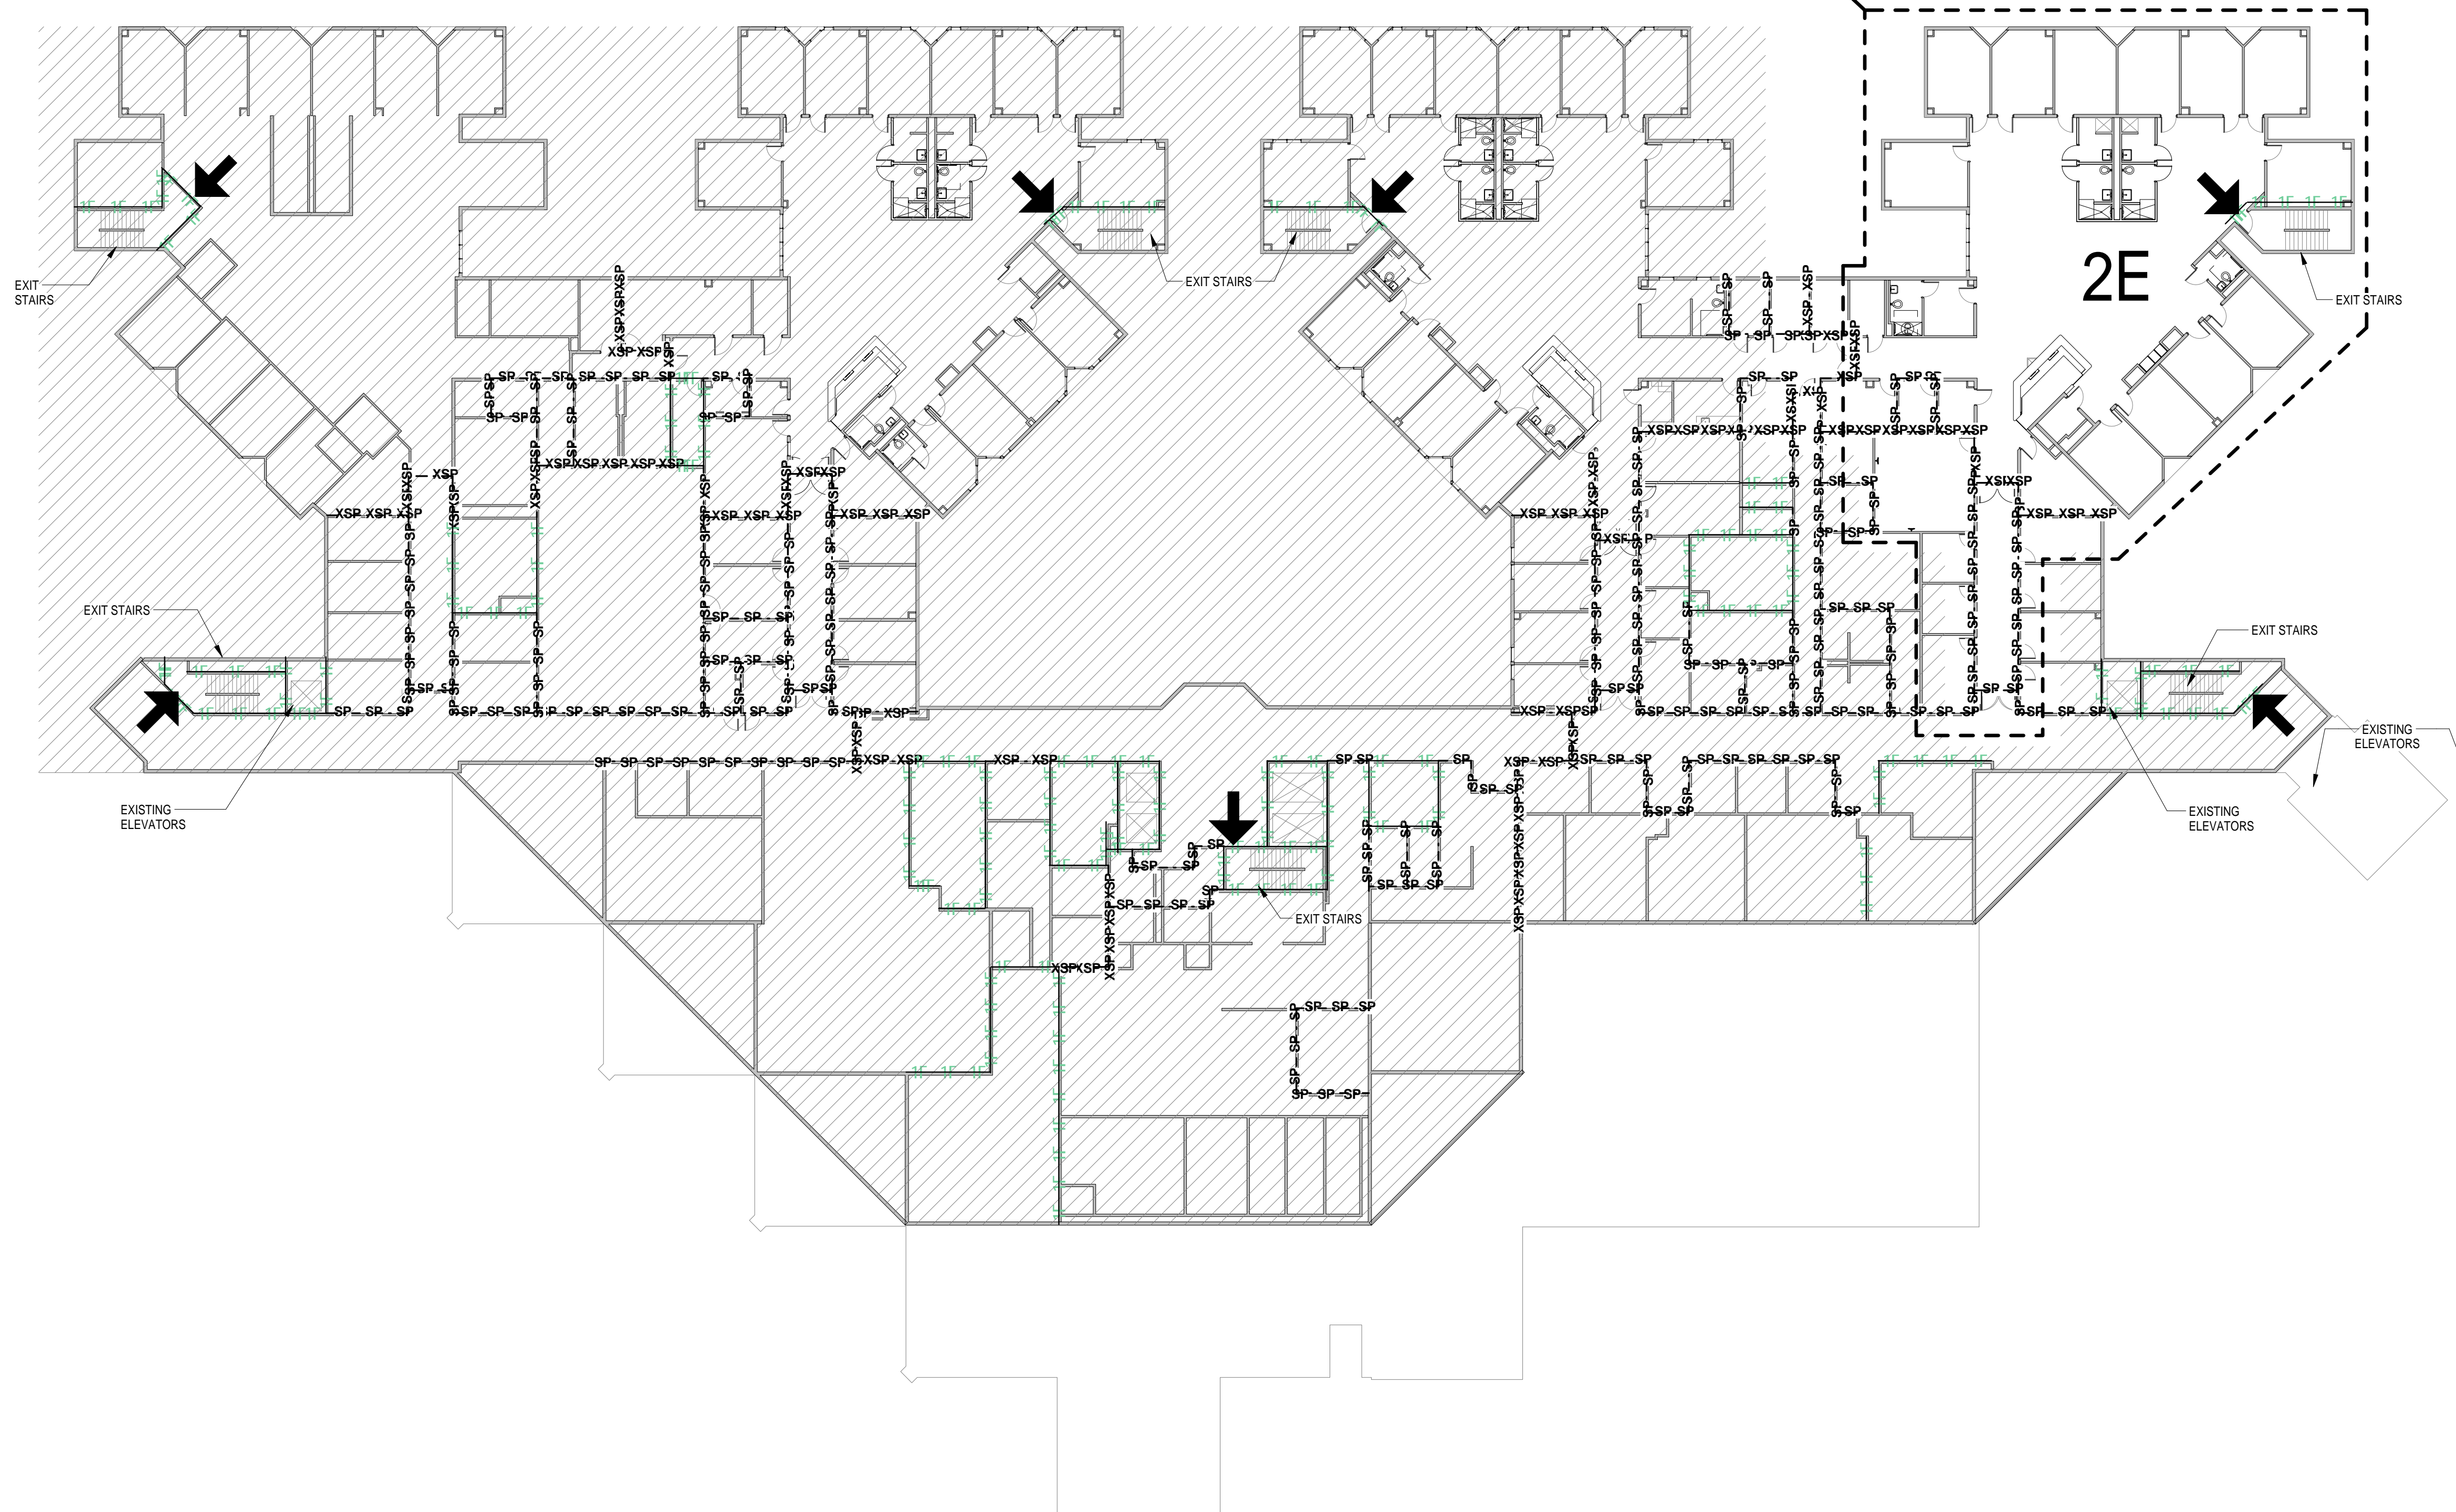

HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS: 1C, 2E, 3B, 3C, 3D & 3E

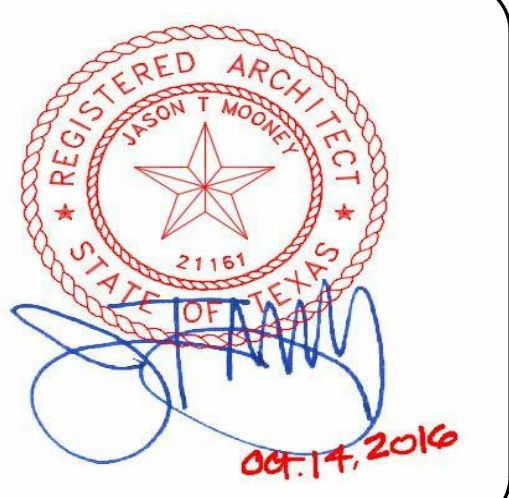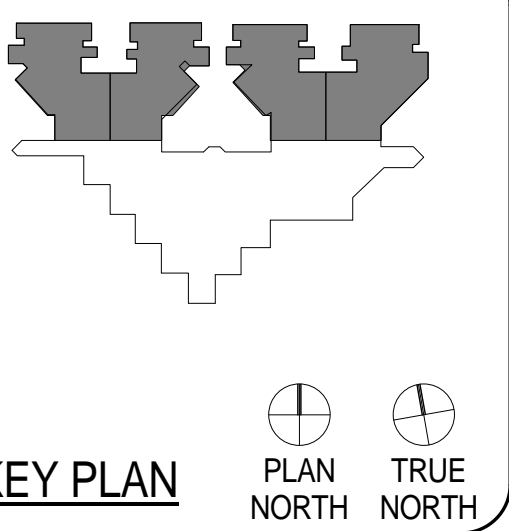

CLIENT UT HEALTH		
PROJECT NUMBER 16106		
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
COMPOSITE PLAN - THIRD FLOOR

A1.03


PROJECT GENERAL INFORMATION	
Name of Project	HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS 1C, 2E, 3B, 3C, 3D, & 3E
Building/ Facility Name:	HARRIS COUNTY PSYCHIATRIC CENTER
Location/ Address:	2800 S. MAGREGOR WAY, HOUSTON, TX 77021
Description of Project:	INTERIOR RENOVATION OF EXISTING PATIENT UNITS
Applicable Building Codes :	N/A
Accessibility	2012 TEXAS ACCESSIBILITY STANDARDS
Overall Type of Construction:	TYPE EXISTING I-B
Mixed Type of Construction:	N/A
Occupancy Classification(s):	I-2
Overall Use of Building:	PSYCHIATRIC FACILITY
High Rise Building:	N/A
Automatic Fire Sprinkler System :	YES (EXISTING)
Type of Automatic Fire Sprinkler System :	EXISTING; RE: MEP DRAWINGS
Standpipe System	RE: MEP DRAWINGS
Active Fire Safety Systems:	EXISTING
Maximum Common Path (A-2 & A-3/ B w/ sprinkler) :	100 FT (I-2 OCCUPANCY WITHIN CARE SUITE)
Maximum Exit Distance (A-2 & A-3/ B w/ sprinkler) :	200 FT
Corridor Fire Resistance Rating	0 HRS (MUST BE SMOKE TIGHT)
Corridor Width	8 FT (WHERE REQUIRED FOR BED MOVEMENT) OR AS SHOWN 96 INCHES


OCCUPANT INFORMATION							
Query (Occupants)	Number of Occupants	Egress Stair Width (in.)		Exits		Egress Door Width (in.)	
		Required (.2')	Provided	Required	Provided	Required	Provided
First Floor							
Second Floor							
Third Floor							

ALLOWABLE HEIGHTS AND AREAS	
Occupancy Classification	I-2
Allowable Height Stories (w/ sprinkler increase)	5
Allowable Height in Feet (w/ sprinkler increase)	180
Allowable Area (SF)	UL
Frontage Increase (###%) (SF)	N/A
Sprinkler Increase (###%) (SF)	N/A
Total Allowable Area per Story (SF)	UL

LIFE SAFETY LEGEND

- EXISTING SMOKE PARTITION
- EXISTING SMOKE PARTITION (SP)
- EXISTING SMOKE BARRIER (SB) / 30min
- EXISTING FIRE BARRIER (F) / 1hr
- EXISTING FIRE BARRIER (F) / 2hr
- EXISTING FIRE BARRIER (F) / 3hr
- EXISTING PARTITION
- NEW PARTITION
- EXISTING EXIT LOCATION
- FIRE RATING OF DOOR IN MINUTES
- EXISTING FIRE EXTINGUISHER CABINET
- EXISTING FIRE EXTINGUISHER
- EXIT LIGHT FIXTURE W/ DIRECTION, SOLID FILL DENOTES FACE OF EXIT FIXTURE
- LONGEST ROUTE TO AN EXIT
- MAGNETIC HOLD OPEN

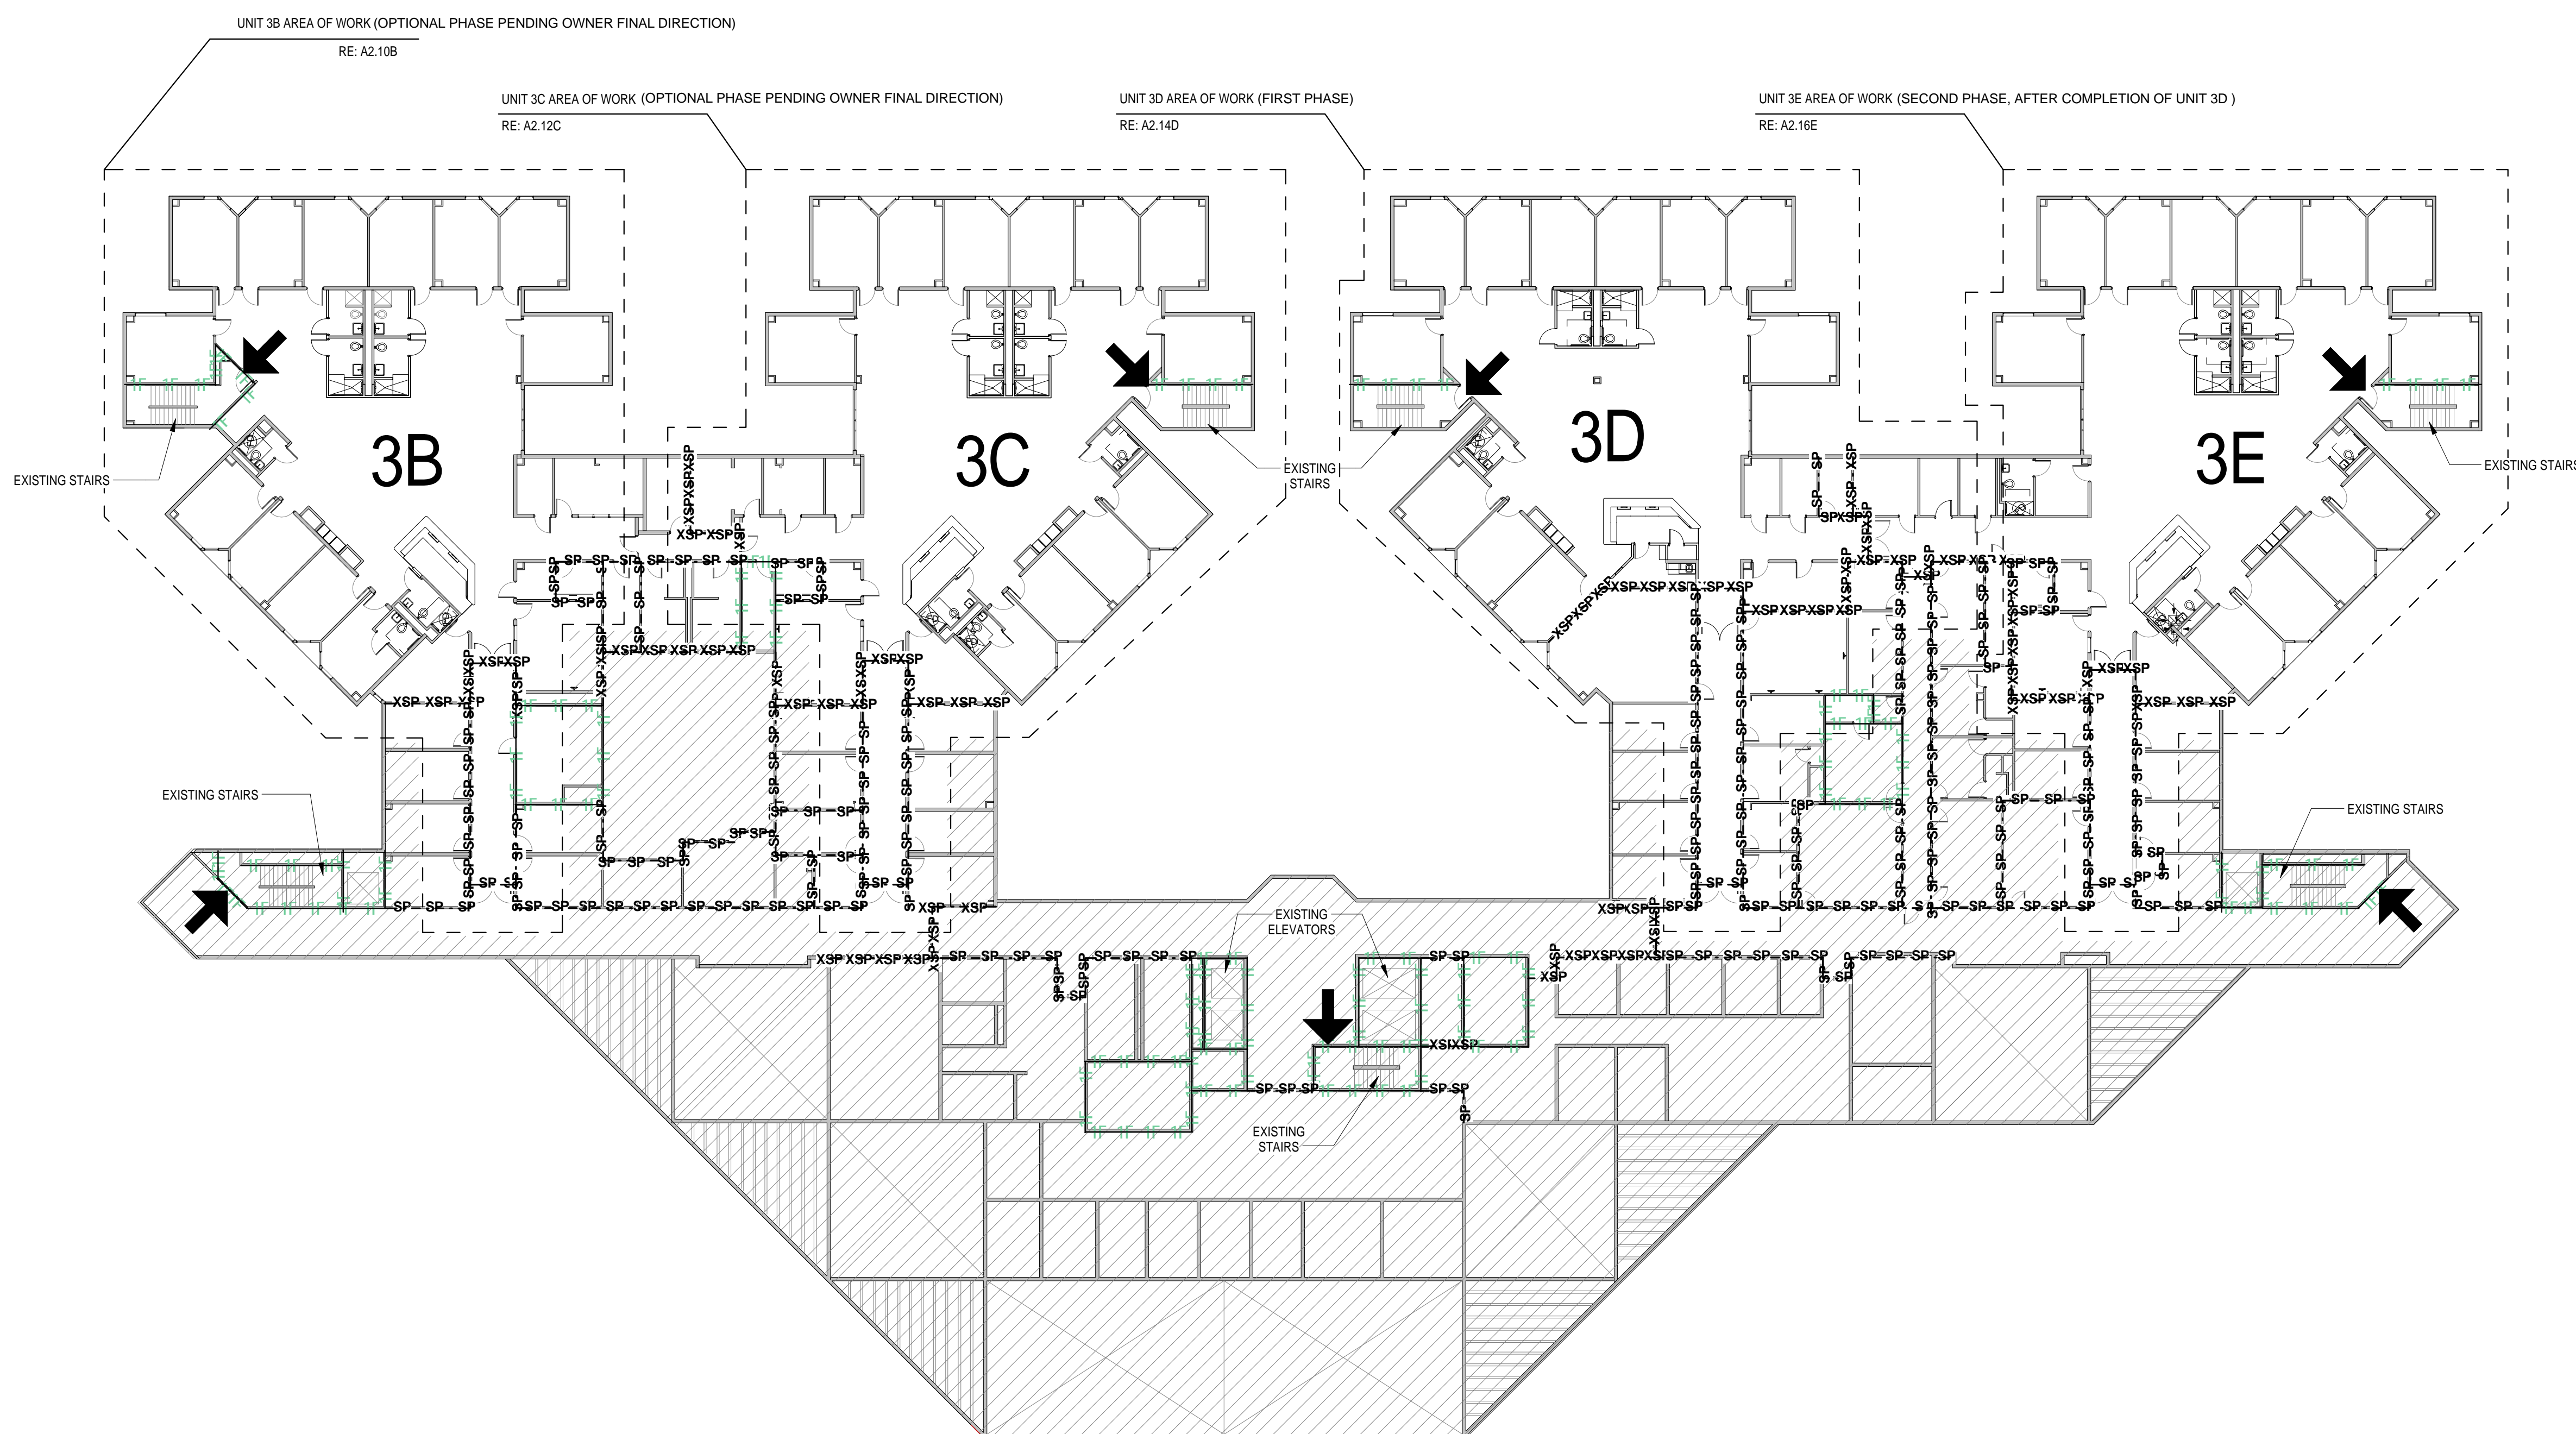

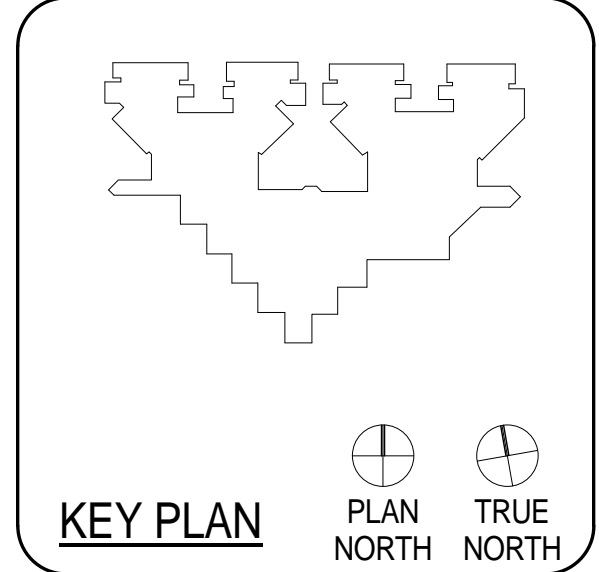

CLIENT	UT HEALTH
PROJECT NUMBER	16106
DATE:	OCTOBER 14, 2016
DRAWN BY:	Author
CHECKED BY:	Checker


No.	Description	Date

ISSUE FOR BID
**SCHEDULES - FIRST
FLOOR UNIT 1C**

A2.01C

WT	ELEV.	DOOR			FRAME			DETAILS				REMARKS		
		PAIR /SIN /GLE	W	H	ELEV.	W	H	SILL	JAMB	HEAD	H.W.		FIRE RATING LABEL	
1-C20	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXIST.	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR
1-C23	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.01C	2/A2.01C	SEE BELOW	N/A	
1-C24	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.01C	2/A2.01C	SEE BELOW	N/A	
1-C26	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.01C	2/A2.01C	SEE BELOW	N/A	
1-C27	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.01C	2/A2.01C	SEE BELOW	N/A	
1-C35	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXIST.	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR
1-C41	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXIST.	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR

- DOOR HARDWARE IS TO "MATCH EXISTING", BUT SHOULD CONSIST OF THE FOLLOWING COMPONENTS:
- A. (1) EA. SELECT HINGES SL57 FULL-SURFACE GEARED CONTINUOUS HINGES
 - B. (1) EA. PUSH/PULL SET TO MATCH EXISTING, INSTALL PUSH PLATE ON INTERIOR (RESTROOM SIDE) OF DOOR, PULL ON EXTERIOR (COMMON AREA SIDE) OF DOOR, AND PROVIDE (1) LOCKSET FOR STAFF USE ON EXTERIOR (COMMON AREA SIDE) OF DOOR TO MATCH EXISTING
 - C. (1) EA. IVES WS407CCV (WALL BUMPER)/FS436 (FLOOR DOME) DOOR STOP
 - D. (3) EA. IVES SR64 DOOR SILENCERS
 - E. NO CLOSERS

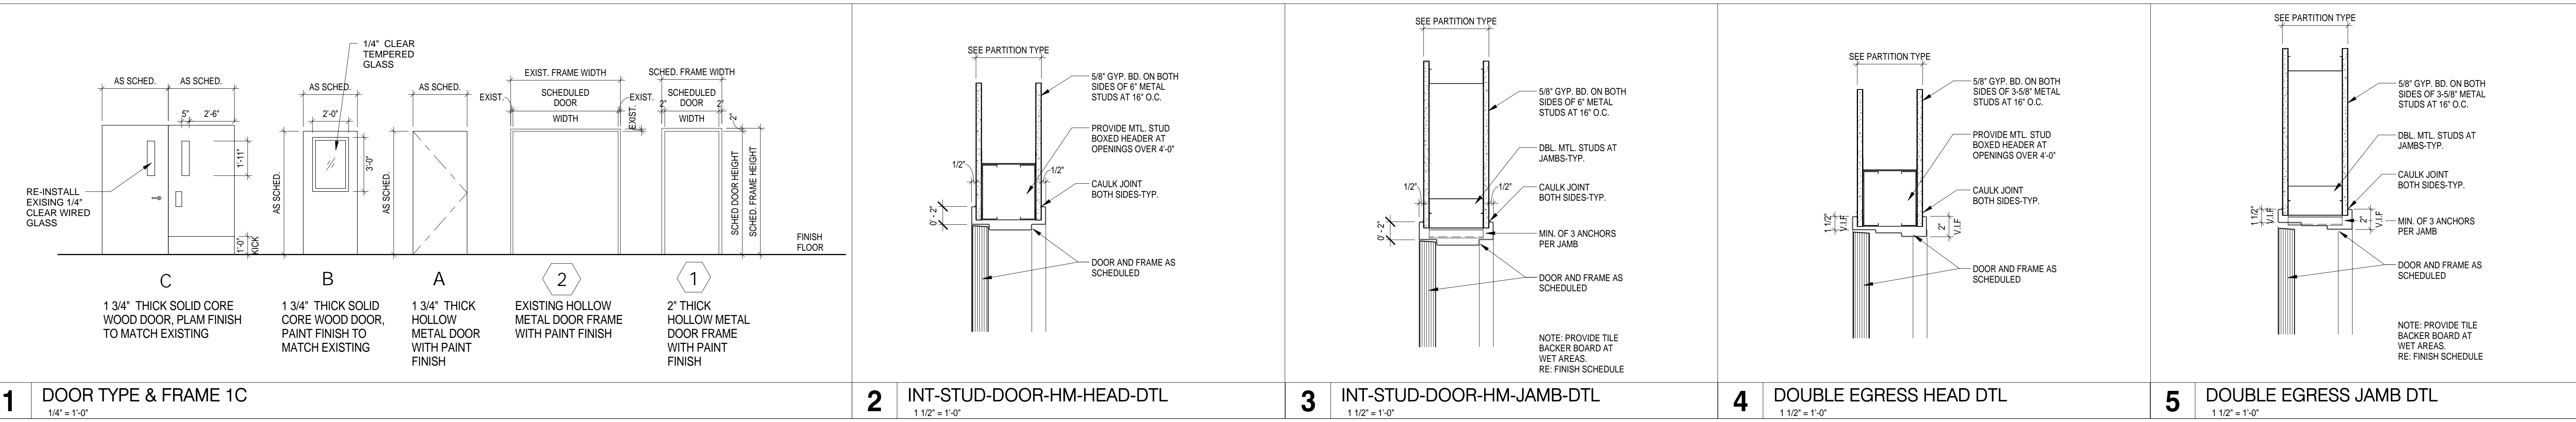

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL: REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES
 - 03 REMOVE EXISTING DOOR AND FRAME; SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN
 - 04 TYPICAL: REMOVE ALL WALL-MOUNTED ACCESSORIES (IE, BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 06 DEMOLISH EXISTING NURSE STATION
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT
 - 12 REMOVE EXISTING FLOORING ONLY
 - 13 ALTERNATE NO. 1C-05; RE: SPECS
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 16 ALTERNATE NO. 1C-01; RE: SPECS

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES
 - 05 RE-PAINT ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK - FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL
 - 07 ALTERNATE NO. 1C-01; RE: SPECS
 - 08 ALTERNATE NO. 1C-02; RE: SPECS
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICTED IN DETAILS WITHIN; MODIFY EXISTING CORING WITH THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA, NO FURROWS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION
 - 10 ALTERNATE NO. 1C-03; RE: SPECS
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS
 - 12 ALTERNATE NO. 1C-05; RE: SPECS

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROMULCH AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE OCCURRENCE OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (I.E. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS. FIRE SEAL ANY PENETRATIONS WITH UL APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVICING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RELOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED OR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS (OR PORTIONS OF WALLS) TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW UNITS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ON ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION; REMOVE EXISTING MECHANICAL EQUIPMENT, RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEP SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS/CEILINGS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK. PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOOR FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BO STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCERS AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 902, TEXAS CIVIL STATUTES (2012) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-865-9068 P
 713-961-4571 F
 TX Firm # F-1709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2625 S. Wilshire Dr. #300
 HOUSTON, TX 77042
 (713) 790-7563



HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS: 1C, 2E, 3B, 3C, 3D & 3E

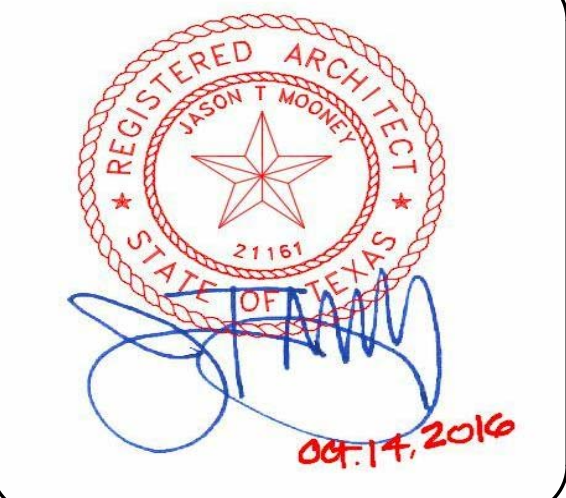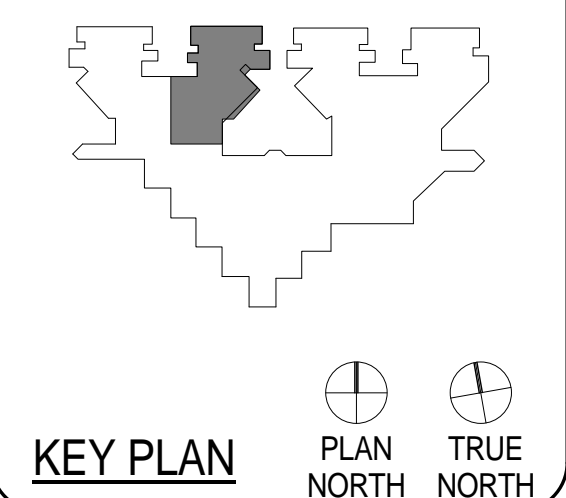


CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
FIRST FLOOR UNIT 1C

A2.02C

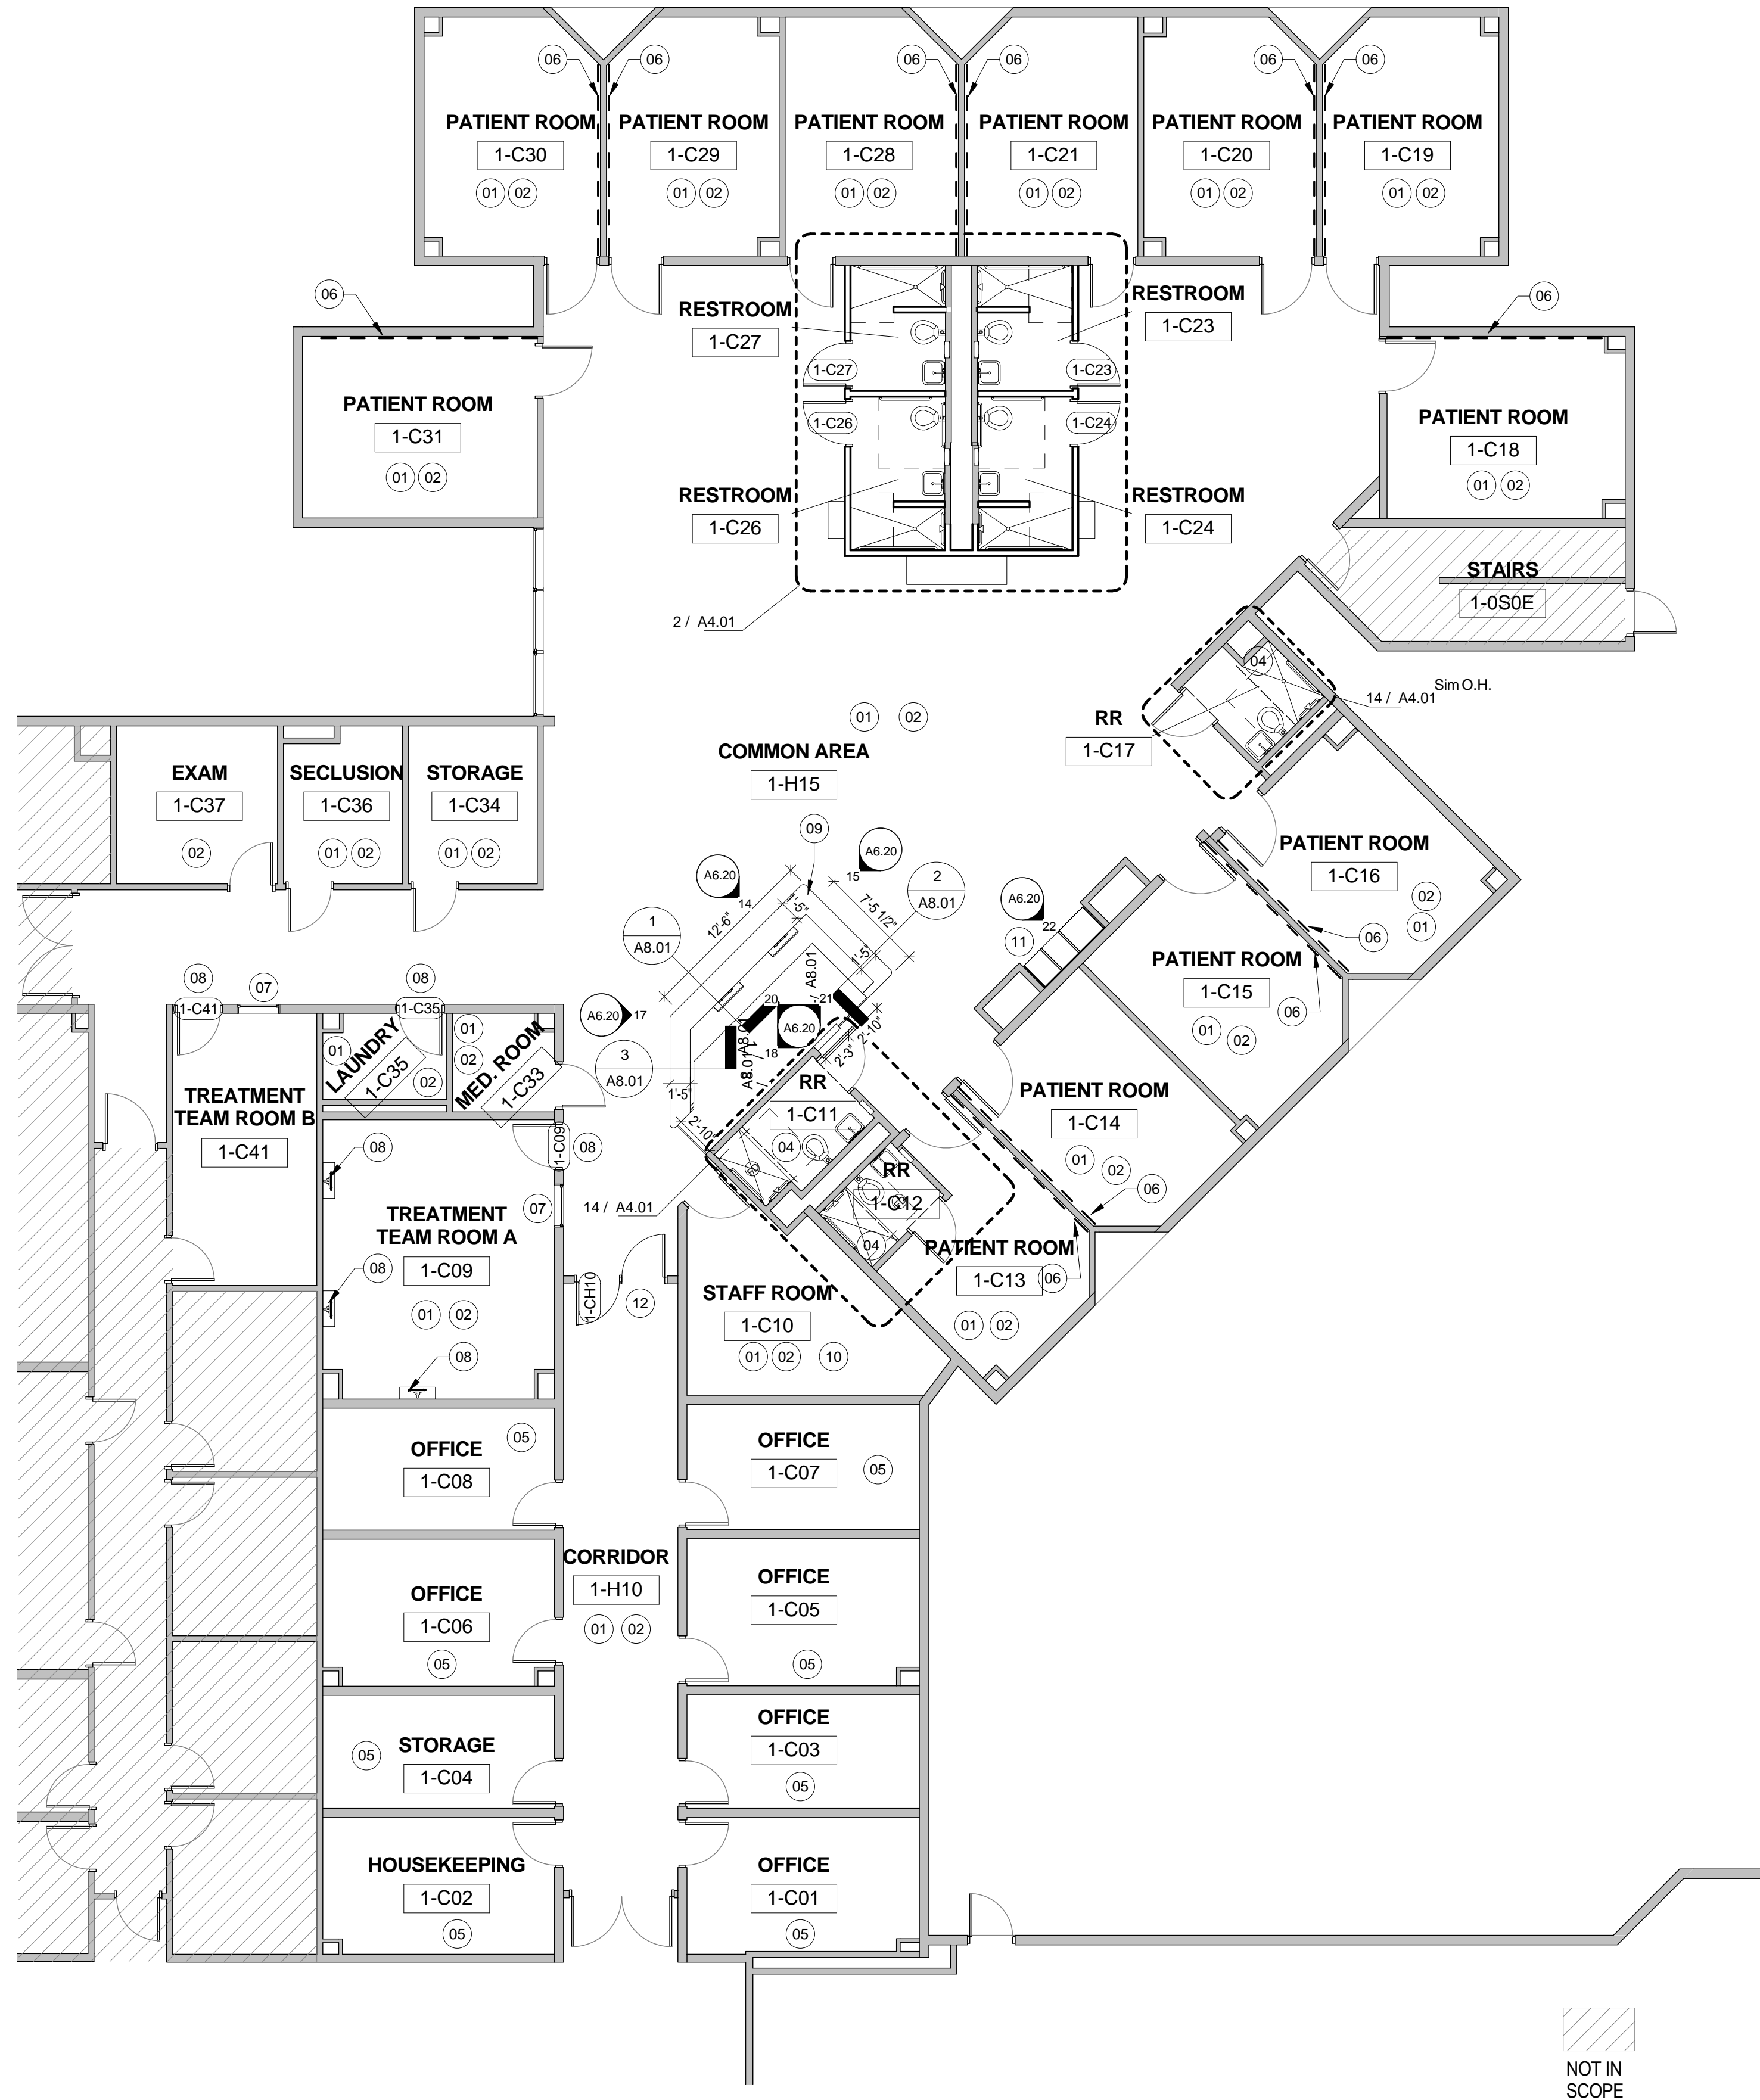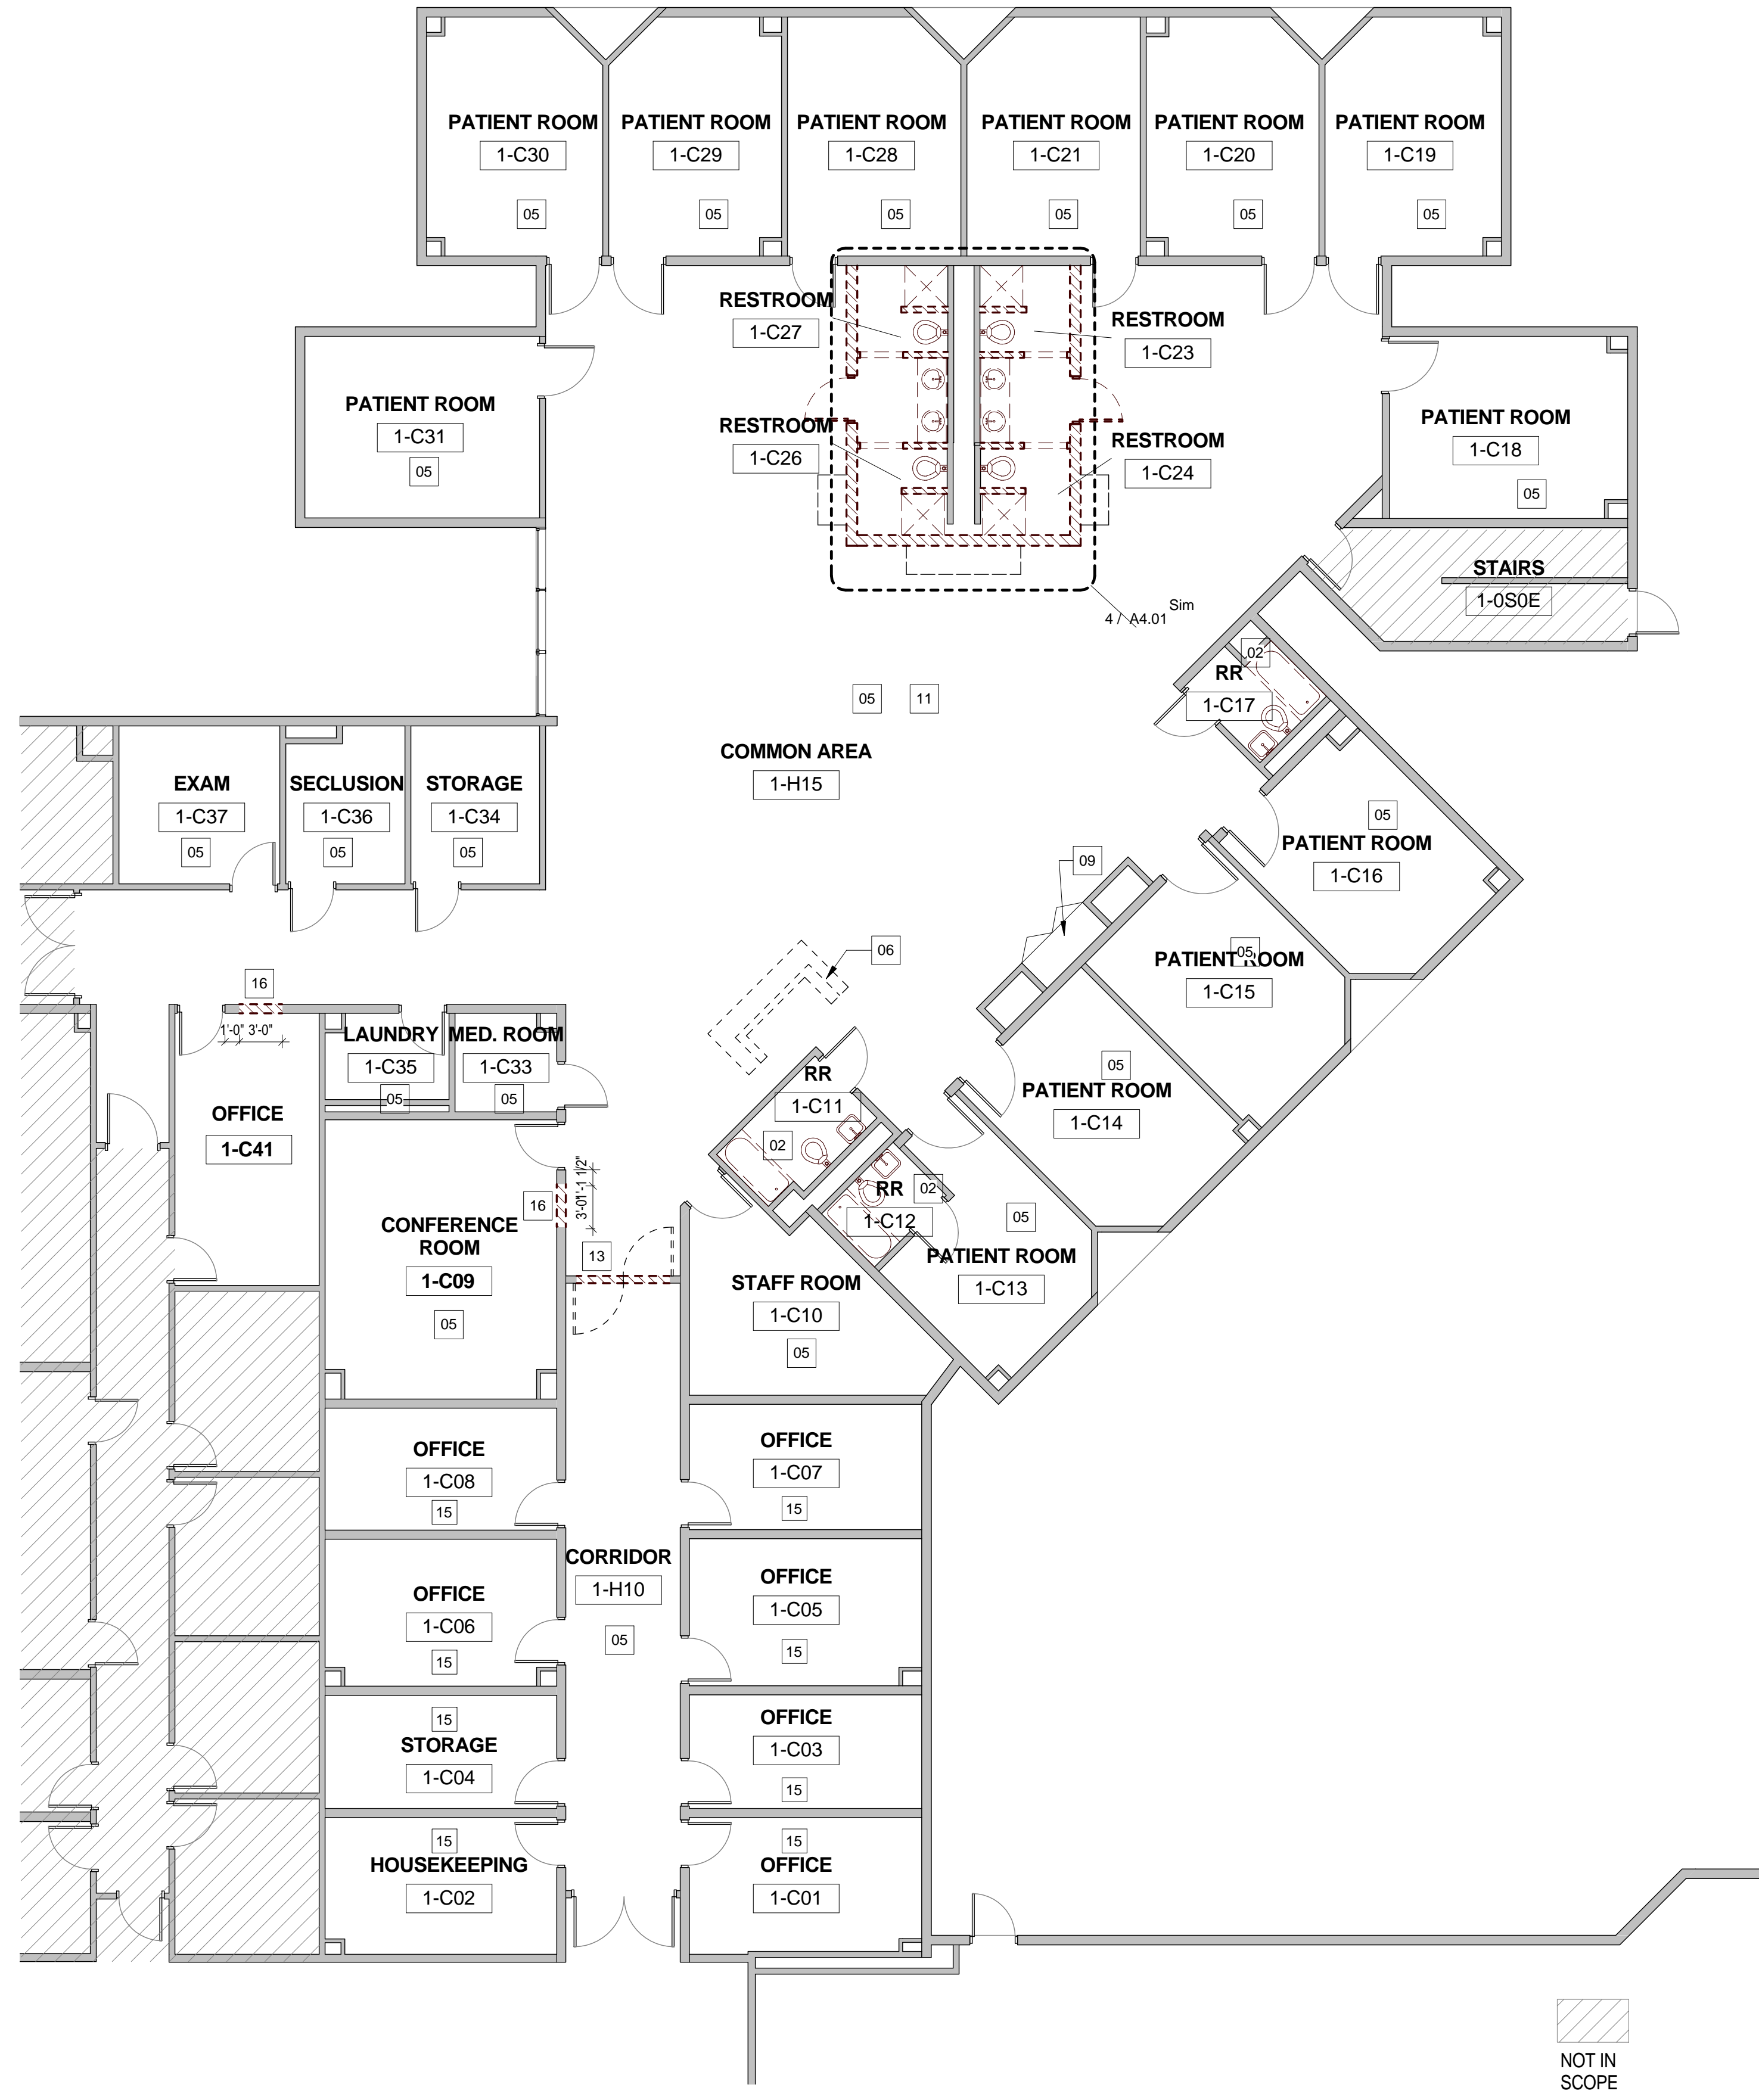

HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATION UNITS: 1C,
2E, 3B, 3C, 3D & 3E

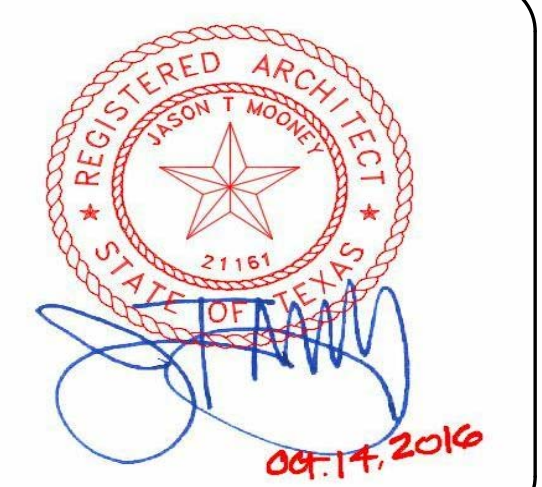


CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	BG	
CHECKED BY:	JM/CJS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID

FIRST FLOOR UNIT
1C - SIGNAGE PLAN


A2.03C

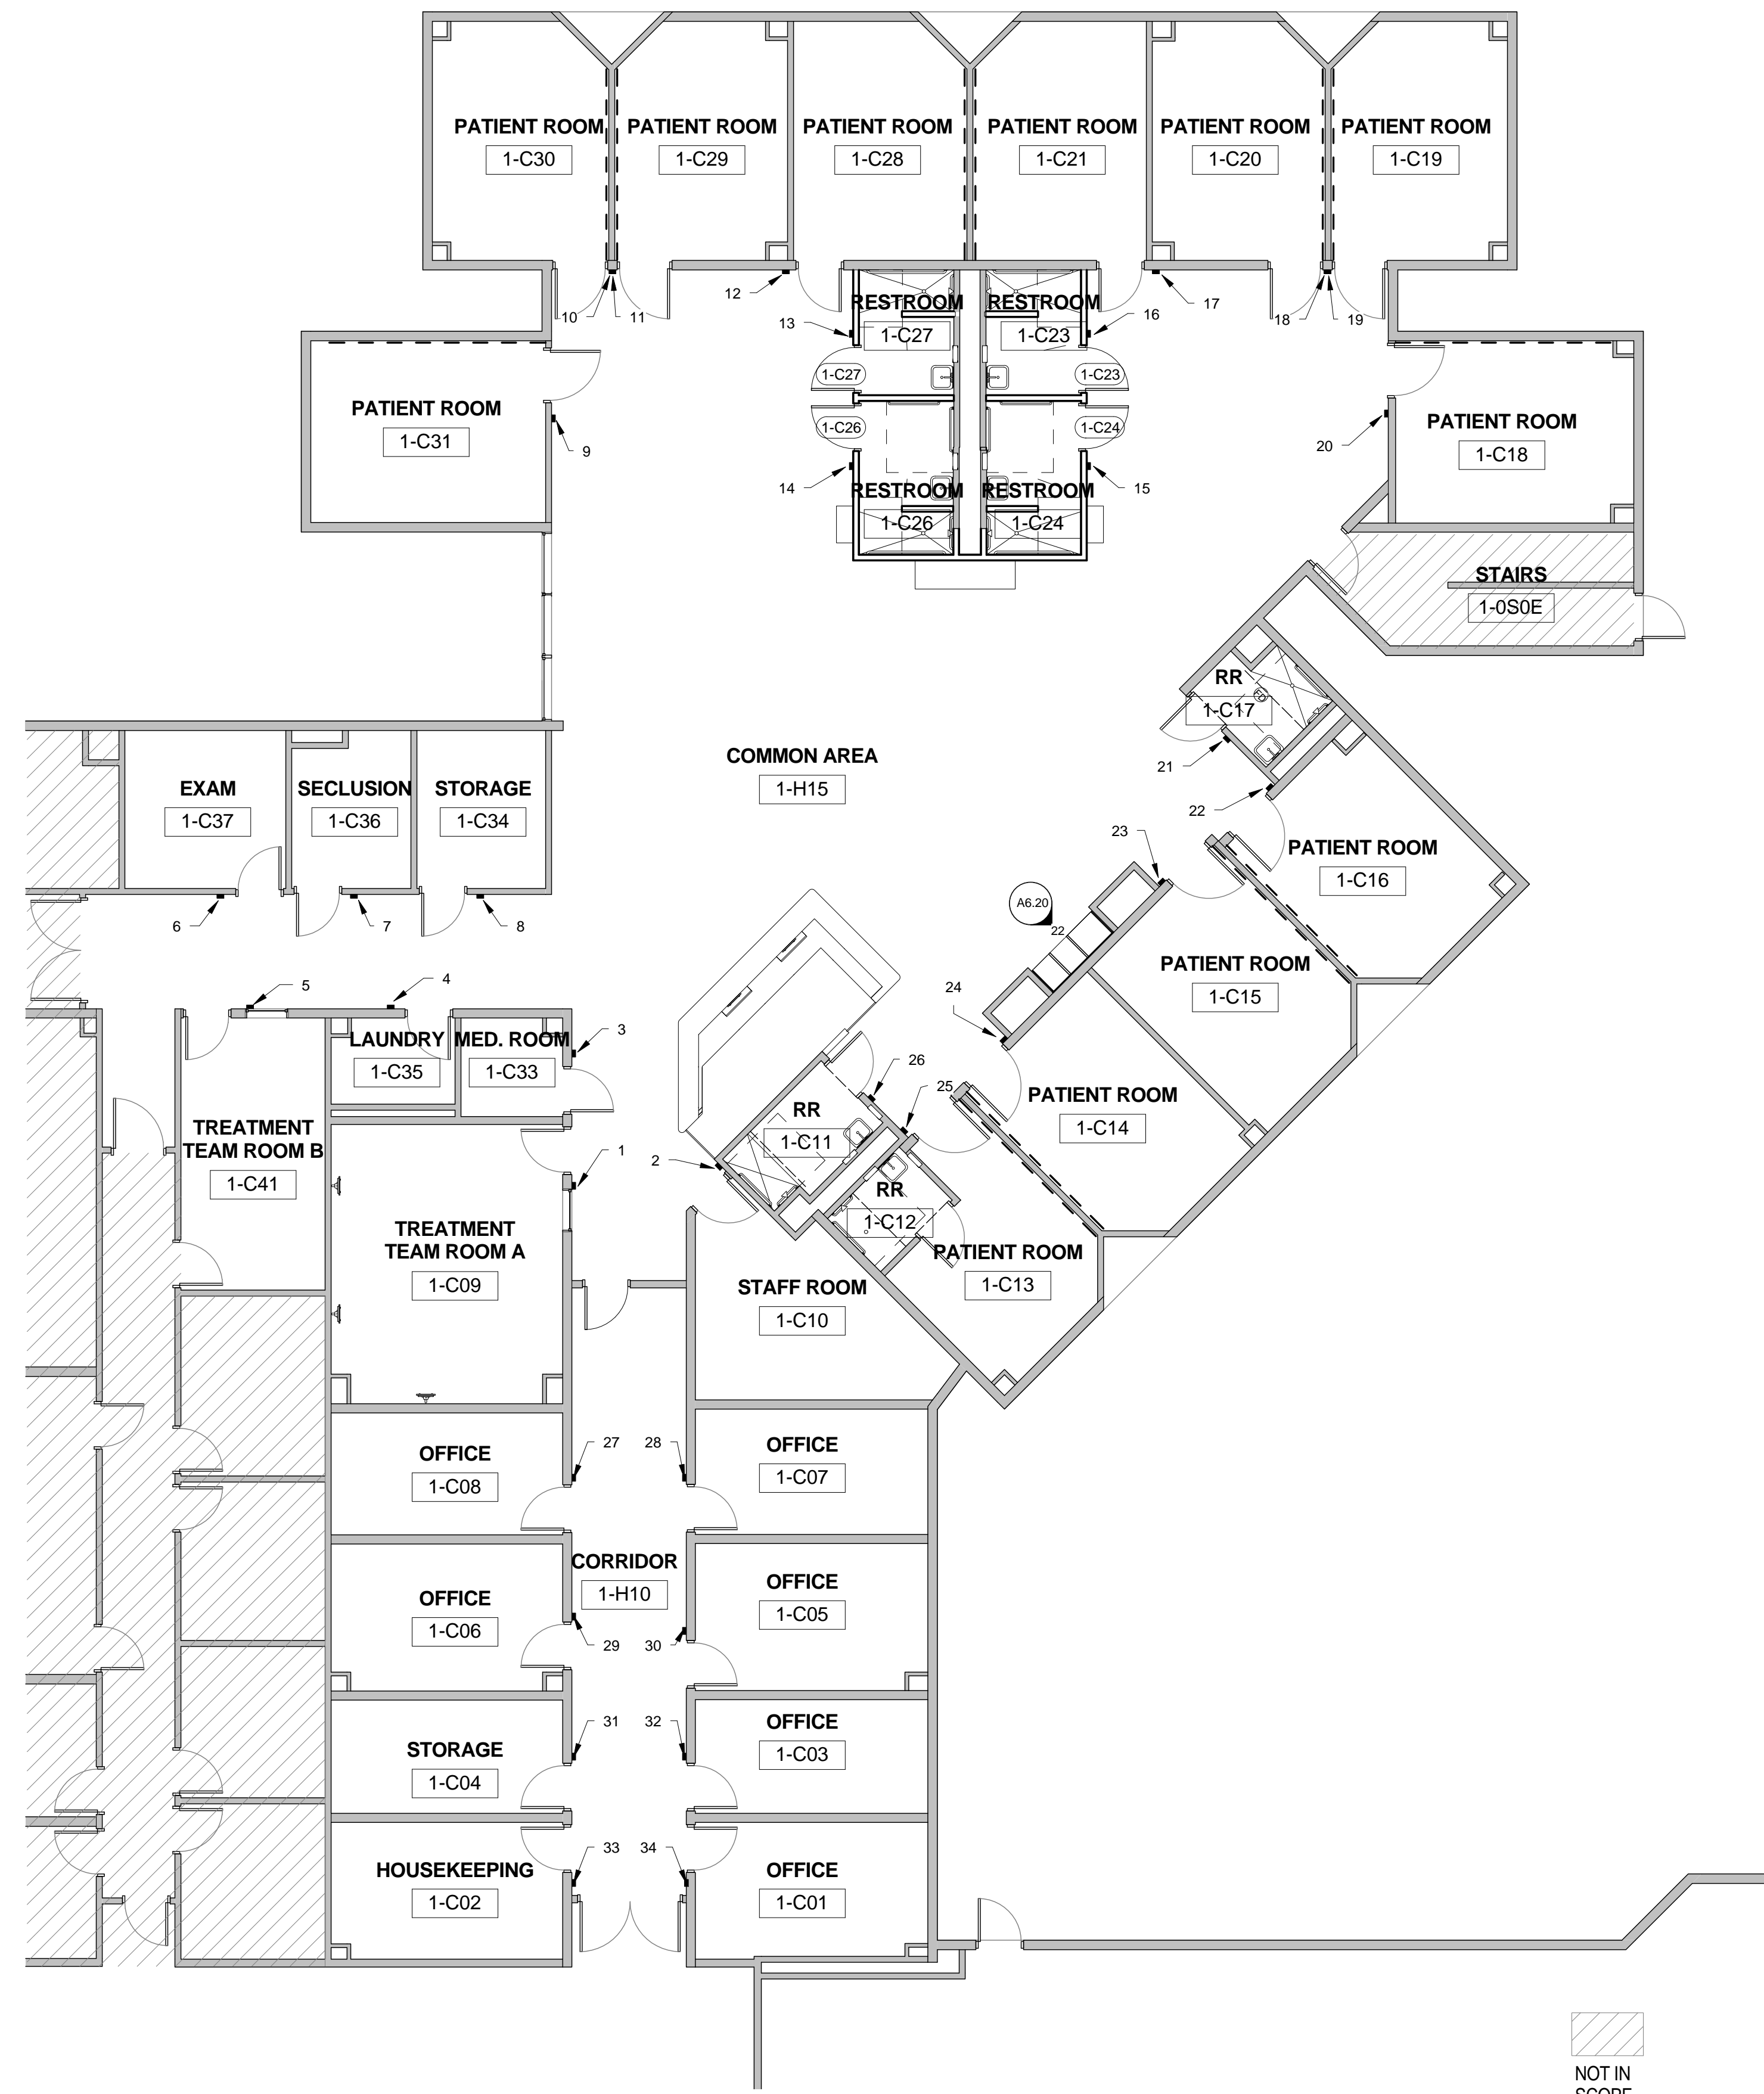

SIGN #	SIGN TYPE	LOCATION	DETAIL	MESSAGE	20	D	1-C18	RE: G4589-14 R1	LINE 1: 1-C18 LINE 2: (ADA BRAILLE: 1-C18) LINE 3: N/A LINE 4: N/A
1	C	1-C09	RE: G4589-14 R1	LINE 1: 1-C09 LINE 2: (ADA BRAILLE: 1-C09) LINE 3: N/A LINE 4: N/A LINE 5: CONFERENCE LINE 6: ROOM LINE 7: (ADA BRAILLE: CONFERENCE ROOM) LINE 8: N/A LINE 9: 1-C10 LINE 2: (ADA BRAILLE: 1-C10) LINE 3: N/A LINE 4: N/A LINE 5: STAFF ROOM LINE 6: (ADA BRAILLE: STAFF ROOM) LINE 7: N/A LINE 1: 1-C33 LINE 2: (ADA BRAILLE: 1-C33) LINE 3: N/A LINE 4: N/A LINE 5: MEDICATION LINE 6: ROOM LINE 7: (ADA BRAILLE: MEDICATION ROOM) LINE 8: N/A LINE 9: 1-C35 LINE 2: (ADA BRAILLE: 1-C35) LINE 3: N/A LINE 4: N/A LINE 5: LAUNDRY LINE 6: (ADA BRAILLE: LAUNDRY) LINE 7: N/A LINE 1: 1-C41 LINE 2: (ADA BRAILLE: 1-C41) LINE 3: N/A LINE 4: N/A LINE 5: TREATMENT TEAM ROOM B LINE 6: (ADA BRAILLE: TREATMENT TEAM ROOM B) LINE 7: N/A LINE 1: 1-C37 LINE 2: (ADA BRAILLE: 1-C37) LINE 3: N/A LINE 4: N/A LINE 5: EXAM ROOM LINE 1: 1-C36 LINE 2: (ADA BRAILLE: 1-C36) LINE 3: N/A LINE 4: N/A LINE 5: SECLUSION LINE 6: (ADA BRAILLE: SECLUSION) LINE 7: N/A LINE 1: 1-C34 LINE 2: (ADA BRAILLE: 1-C34) LINE 3: N/A LINE 4: N/A LINE 5: STORAGE LINE 6: (ADA BRAILLE: STORAGE) LINE 7: N/A LINE 1: 1-C31 LINE 2: (ADA BRAILLE: 1-C31) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C30 LINE 2: (ADA BRAILLE: 1-C30) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C29 LINE 2: (ADA BRAILLE: 1-C29) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C28 LINE 2: (ADA BRAILLE: 1-C28) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C27 LINE 2: (ADA BRAILLE: 1-C27) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C26 LINE 2: (ADA BRAILLE: 1-C26) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C25 LINE 2: (ADA BRAILLE: 1-C25) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C24 LINE 2: (ADA BRAILLE: 1-C24) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C23 LINE 2: (ADA BRAILLE: 1-C23) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C22 LINE 2: (ADA BRAILLE: 1-C22) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C21 LINE 2: (ADA BRAILLE: 1-C21) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C20 LINE 2: (ADA BRAILLE: 1-C20) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C19 LINE 2: (ADA BRAILLE: 1-C19) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C18 LINE 2: (ADA BRAILLE: 1-C18) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C17 LINE 2: (ADA BRAILLE: 1-C17) LINE 3: N/A LINE 4: MALE + FEMALE UNISEX IMAGE LINE 5: IMAGE LINE 6: IMAGE LINE 7: N/A LINE 8: BATHROOM LINE 9: (ADA BRAILLE: BATHROOM) LINE 10: PLEASE KNOCK BEFORE ENTERING LINE 11: POR FAVOR SONAR ANTES DE ENTRAR LINE 12: SLIDER PANEL LINE 13: N/A LINE 14: INSERT LINE 1: 1-C16 LINE 2: (ADA BRAILLE: 1-C16) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C15 LINE 2: (ADA BRAILLE: 1-C15) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C14 LINE 2: (ADA BRAILLE: 1-C14) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C13 LINE 2: (ADA BRAILLE: 1-C13) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C12 LINE 2: (ADA BRAILLE: 1-C12) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C11 LINE 2: (ADA BRAILLE: 1-C11) LINE 3: N/A LINE 4: MALE + FEMALE UNISEX IMAGE LINE 5: IMAGE LINE 6: IMAGE LINE 7: N/A LINE 8: BATHROOM LINE 9: (ADA BRAILLE: BATHROOM) LINE 10: PLEASE KNOCK BEFORE ENTERING LINE 11: POR FAVOR SONAR ANTES DE ENTRAR LINE 12: SLIDER PANEL LINE 13: N/A LINE 14: INSERT LINE 1: 1-C08 LINE 2: (ADA BRAILLE: 1-C08) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C07 LINE 2: (ADA BRAILLE: 1-C07) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C06 LINE 2: (ADA BRAILLE: 1-C06) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C05 LINE 2: (ADA BRAILLE: 1-C05) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C04 LINE 2: (ADA BRAILLE: 1-C04) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C03 LINE 2: (ADA BRAILLE: 1-C03) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C02 LINE 2: (ADA BRAILLE: 1-C02) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C01 LINE 2: (ADA BRAILLE: 1-C01) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C24 LINE 2: (ADA BRAILLE: 1-C24) LINE 3: N/A LINE 4: FEMALE + WHEELCHAIR IMAGE LINE 5: IMAGE LINE 6: IMAGE LINE 7: N/A LINE 8: ADA MEN'S LINE 9: (ADA BRAILLE: ADA MEN'S) LINE 10: PLEASE KNOCK BEFORE ENTERING LINE 11: POR FAVOR SONAR ANTES DE ENTRAR LINE 12: SLIDER PANEL LINE 13: N/A LINE 14: INSERT LINE 1: 1-C23 LINE 2: (ADA BRAILLE: 1-C23) LINE 3: N/A LINE 4: FEMALE IMAGE LINE 5: IMAGE LINE 6: IMAGE LINE 7: N/A LINE 8: WOMEN'S LINE 9: (ADA BRAILLE: ADA WOMEN'S) LINE 10: PLEASE KNOCK BEFORE ENTERING LINE 11: POR FAVOR SONAR ANTES DE ENTRAR LINE 12: SLIDER PANEL LINE 13: N/A LINE 14: INSERT LINE 1: 1-C21 LINE 2: (ADA BRAILLE: 1-C21) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C20 LINE 2: (ADA BRAILLE: 1-C20) LINE 3: N/A LINE 4: N/A LINE 5: INSERT LINE 1: 1-C19 LINE 2: (ADA BRAILLE: 1-C19) LINE 3: N/A LINE 4: N/A					

NOTE: REFER TO ELEVATION FOR MOUNTING HEIGHTS. SIGNS 10, 11 AND 18, 19 MUST BE MOUNTED ONE ABOVE THE OTHER WITHIN ACCEPTABLE ADA MOUNTING HEIGHTS.
V.1.1 WALL SPACES FOR SIGN WIDTHS. NOTIFY ARCHITECTS OF SIGNS NEEDING TO BE SHORTENED TO FIT AT DESIGNATED LOCATION.

NOT IN SCOPE

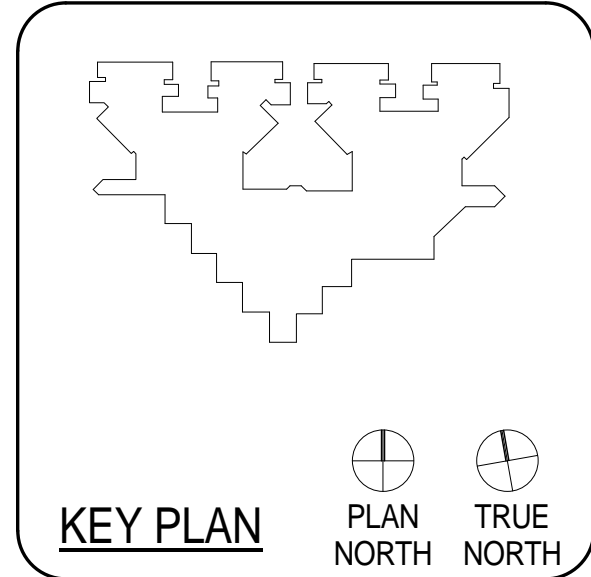

CLIENT
UT HEALTH
PROJECT NUMBER
16106
DATE: OCTOBER 14, 2016
DRAWN BY: Author
CHECKED BY: Checker

No.	Description	Date

ISSUE FOR BID
**SCHEDULES -
SECOND FLOOR
UNIT 2E**

A2.04E

MARK	ELEV.	DOOR				FRAME				DETAILS				FIRE RATING LABEL	REMARKS
		PAIR /SIN GLE	SIZE W x H		MATL	ELEV.	SIZE W x H		MATL	SILL	JAMB	HEAD	H.W.		
			W	H			W	H							
2-E18	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
2-E60	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
2-E63	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXISTING	2	N/A		
2-E75	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.04E	2/A2.04E	1	N/A		
2-E76	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.04E	2/A2.04E	1	N/A		
2-E77	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.04E	2/A2.04E	1	N/A		
2-E78	A	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	HM	3/A2.04E	2/A2.04E	1	N/A		
2-E87	B	S	3'-0"	7'-0"	SC WD	1	3'-4"	7'-4"	EXIST.	EXIST.	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
2-EH04	C	P	7'-0"	7'-0"	EXISTING	2	7'-4"	7'-4"	EXIST	EXIST.	EXISTING	1	N/A	SALVAGE EXISTING HARDWARE AND REINSTALL; RE-USE EXISTING GLASS LITE; EXISTING FRAME W/ NEW PAINT FINISH; RE: ALTERNATE NO. 2E-08	

HARDWARE SET 1




DOOR HARDWARE IS TO 'MATCH EXISTING', BUT SHOULD CONSIST OF THE FOLLOWING COMPONENTS:

- A. (1) EA. SELECT HINGES SL57 FULL-SURFACE GEARED CONTINUOUS HINGES
- B. (1) EA. *PUSH/PULL SET TO MATCH EXISTING; INSTALL PUSH PLATE ON INTERIOR (RESTROOM SIDE) OF DOOR, PULL ON EXTERIOR (COMMON AREA SIDE) OF DOOR, AND PROVIDE (1) LOCKSET FOR STAFF USE ON EXTERIOR (COMMON AREA SIDE) OF DOOR TO MATCH EXISTING
- C. (1) EA. IVES WS407CCV (WALL BUMPER)/FS436 (FLOOR DOME) DOOR STOP
- D. (3) EA. IVES SR64 DOOR SILENCERS
- E. NO CLOSERS

HARDWARE SET 2

DOOR HARDWARE IS TO 'MATCH EXISTING', BUT SHOULD CONSIST OF THE FOLLOWING COMPONENTS:

- A. (1) EA. SELECT HINGES SL57 FULL-SURFACE GEARED CONTINUOUS HINGES
- B. (1) EA. STORAGE FUNCTION LOCK SET IN HARDWARE TO MATCH EXISTING; COORDINATE WITH OWNER.
- C. (1) EA. IVES WS407CCV (WALL BUMPER)/FS436 (FLOOR DOME) DOOR STOP
- D. (3) EA. IVES SR64 DOOR SILENCERS
- E. NO CLOSERS

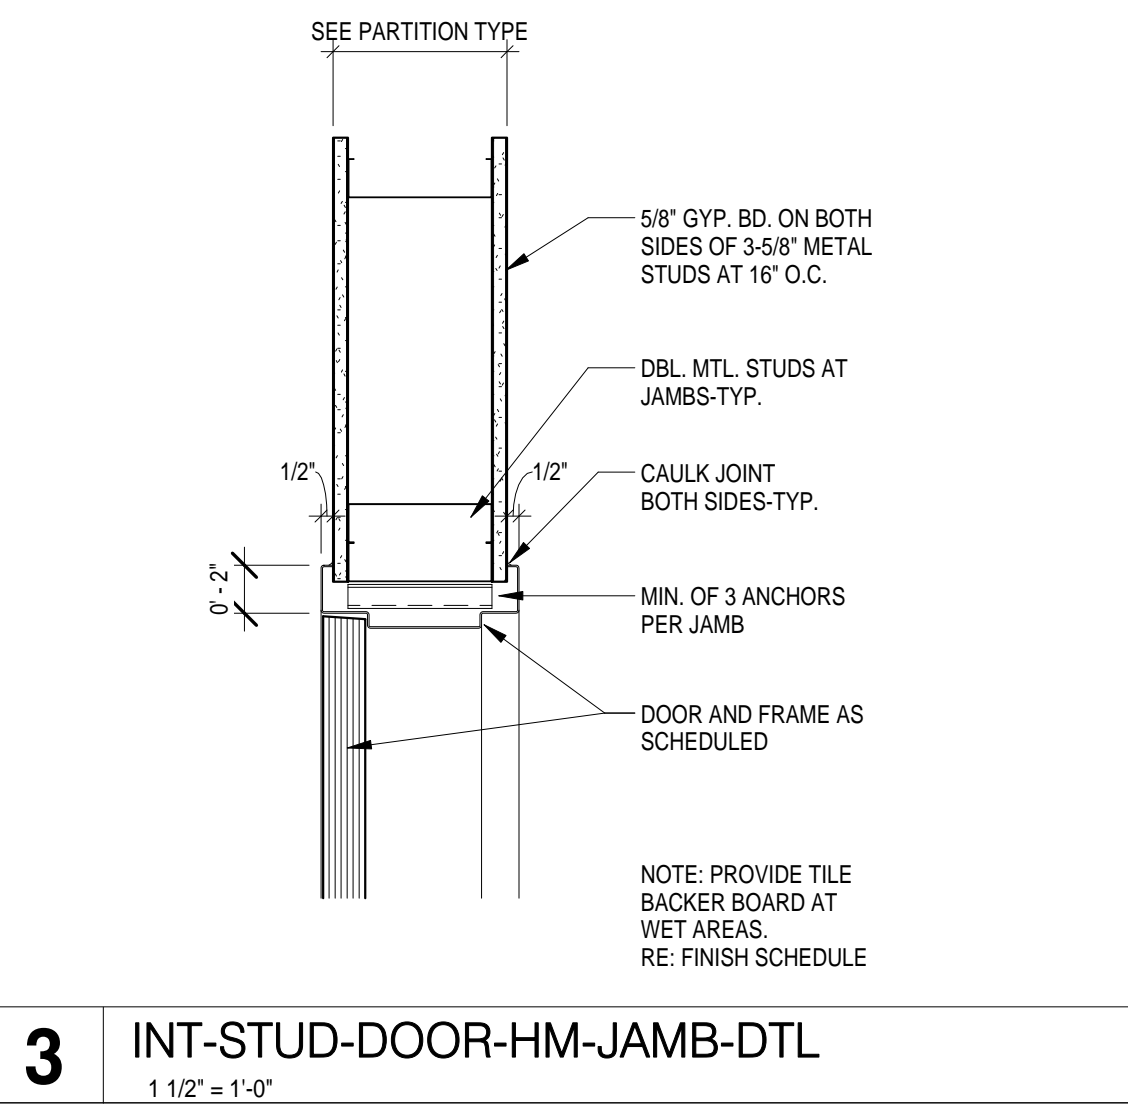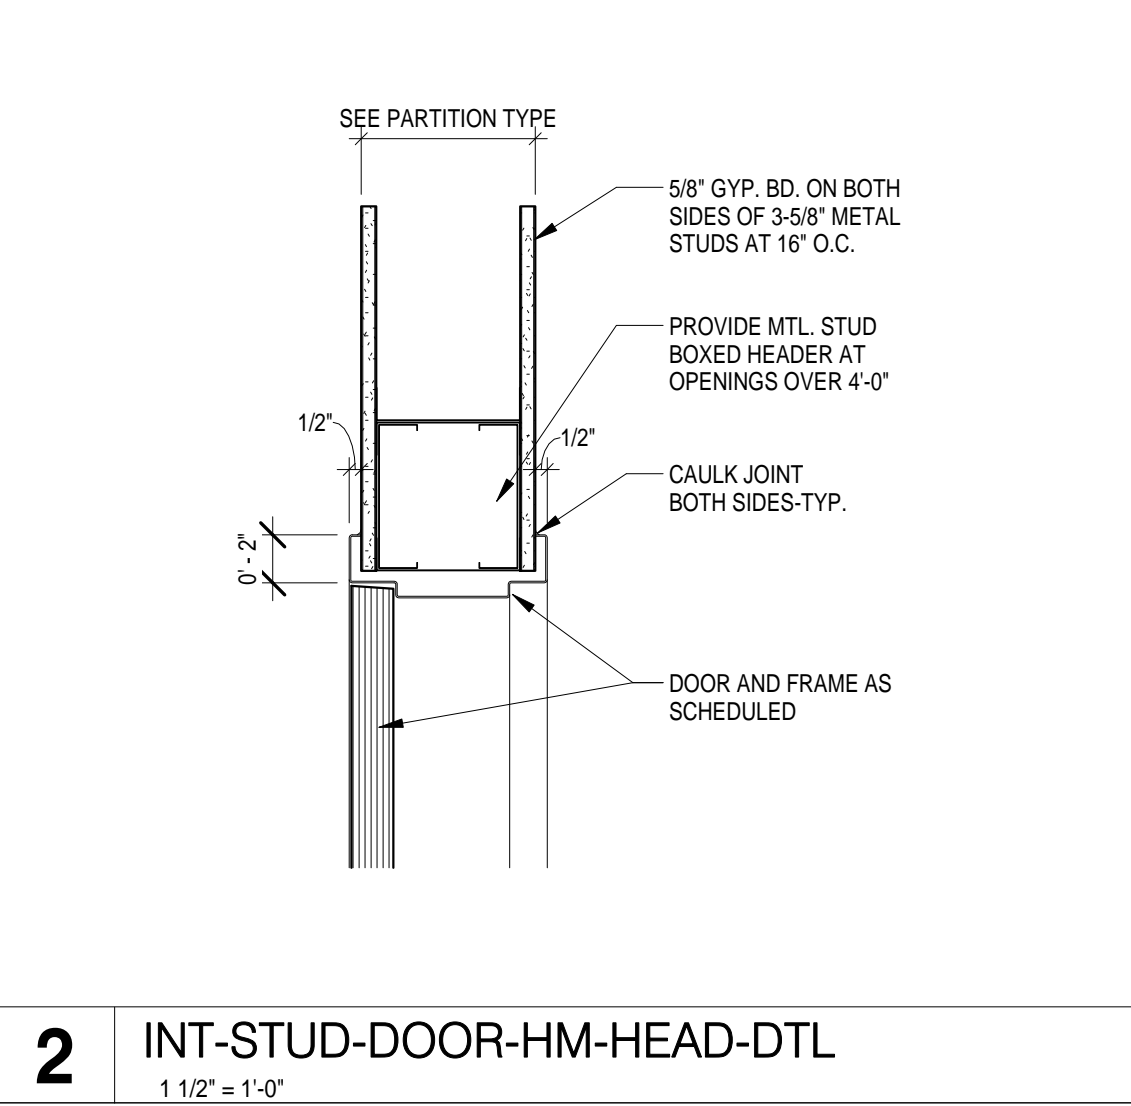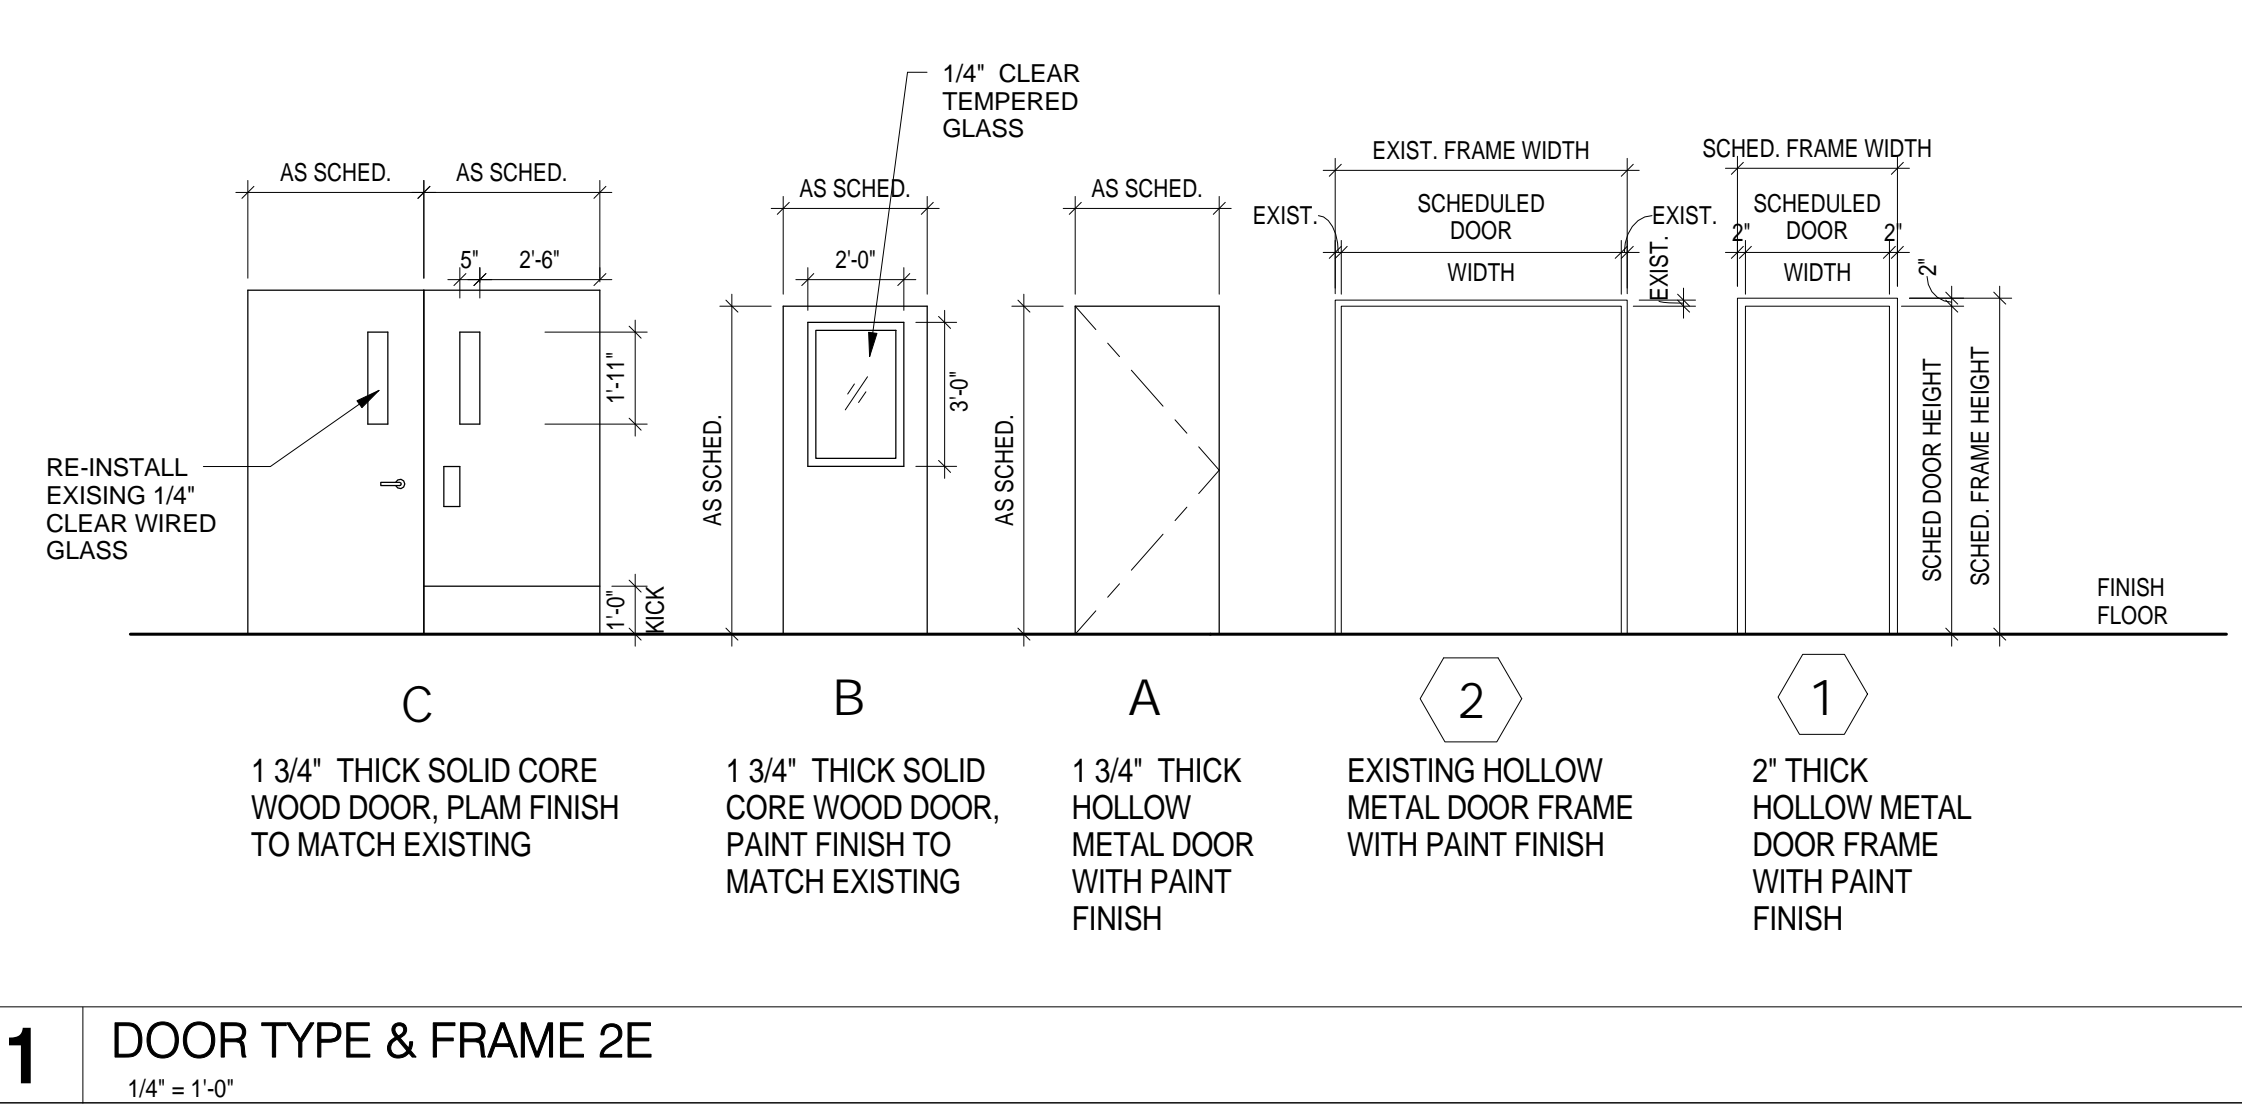

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL - REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES, PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES.
 - 03 REMOVE EXISTING DOOR AND FRAME; SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN.
 - 04 TYPICAL - REMOVE ALL WALL-MOUNTED ACCESSORIES (IE, BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 06 DEMOLISH EXISTING NURSE STATION.
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY.
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE.
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE.
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT.
 - 12 REMOVE EXISTING FLOORING ONLY.
 - 13 ALTERNATE NO. 2E-05; RE: SPECS.
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN.
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 16 ALTERNATE NO. 2E-01; RE: SPECS.

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN.
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN.
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD.
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES.
 - 05 RE-PANT ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK. FLOORING REPLACEMENT AND WALL PAINTING SHALL OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER.
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL.
 - 07 ALTERNATE NO. 2E-01; RE: SPECS.
 - 08 ALTERNATE NO. 2E-02; RE: SPECS.
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICTED IN DETAILS WITHIN; MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA, NO FURR-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION.
 - 10 ALTERNATE NO. 2E-03; RE: SPECS.
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS.
 - 12 ALTERNATE NO. 2E-05; RE: SPECS.

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROMULCH AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE MOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING/ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (I.E. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH U.L. APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED PLUNION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMANDER OF THE BUILDING.
19. CONTRACTOR TO RE-LOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS (OR PORTIONS OF WALLS) TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW UNTELS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION. REMOVE EXISTING MECHANICAL EQUIPMENT. RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEPT DRAWINGS FOR DEMOLITION OF MEPT SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS CEILINGS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK. PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET WASTECUT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOORS FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCER AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 9102, TEXAS CIVIL STATUTES (2012) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-965-9600 P
 713-961-4571 F
 TX Firm F-1709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2625 S. Wilshire Dr. #300
 HOUSTON, TX 77042
 (713) 790-7563



**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

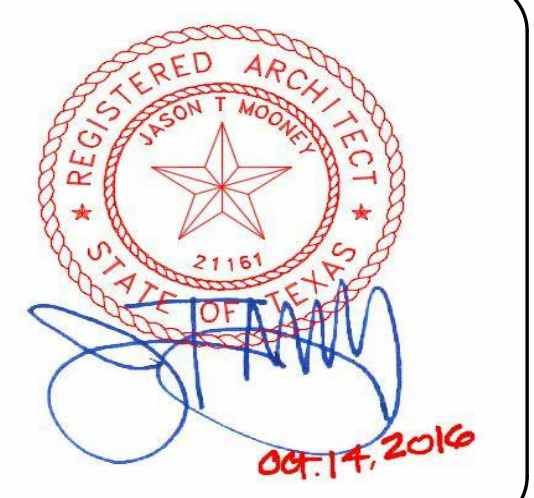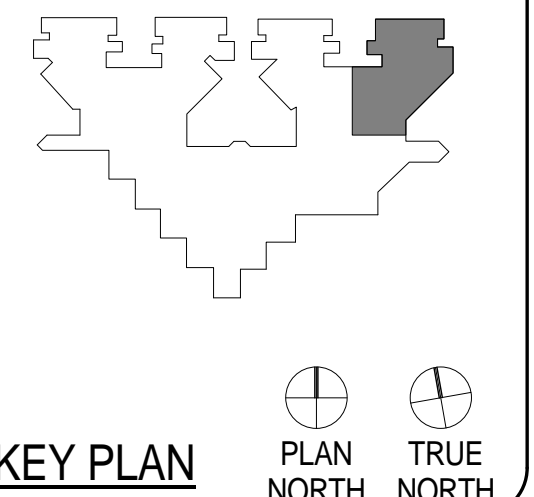


CLIENT UT HEALTH		
PROJECT NUMBER 16106		
DATE:	OCTOBER 14, 2016	
DRAWN BY:	Author	
CHECKED BY:	Checker	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**SECOND FLOOR
 UNIT 2E**

A2.05E

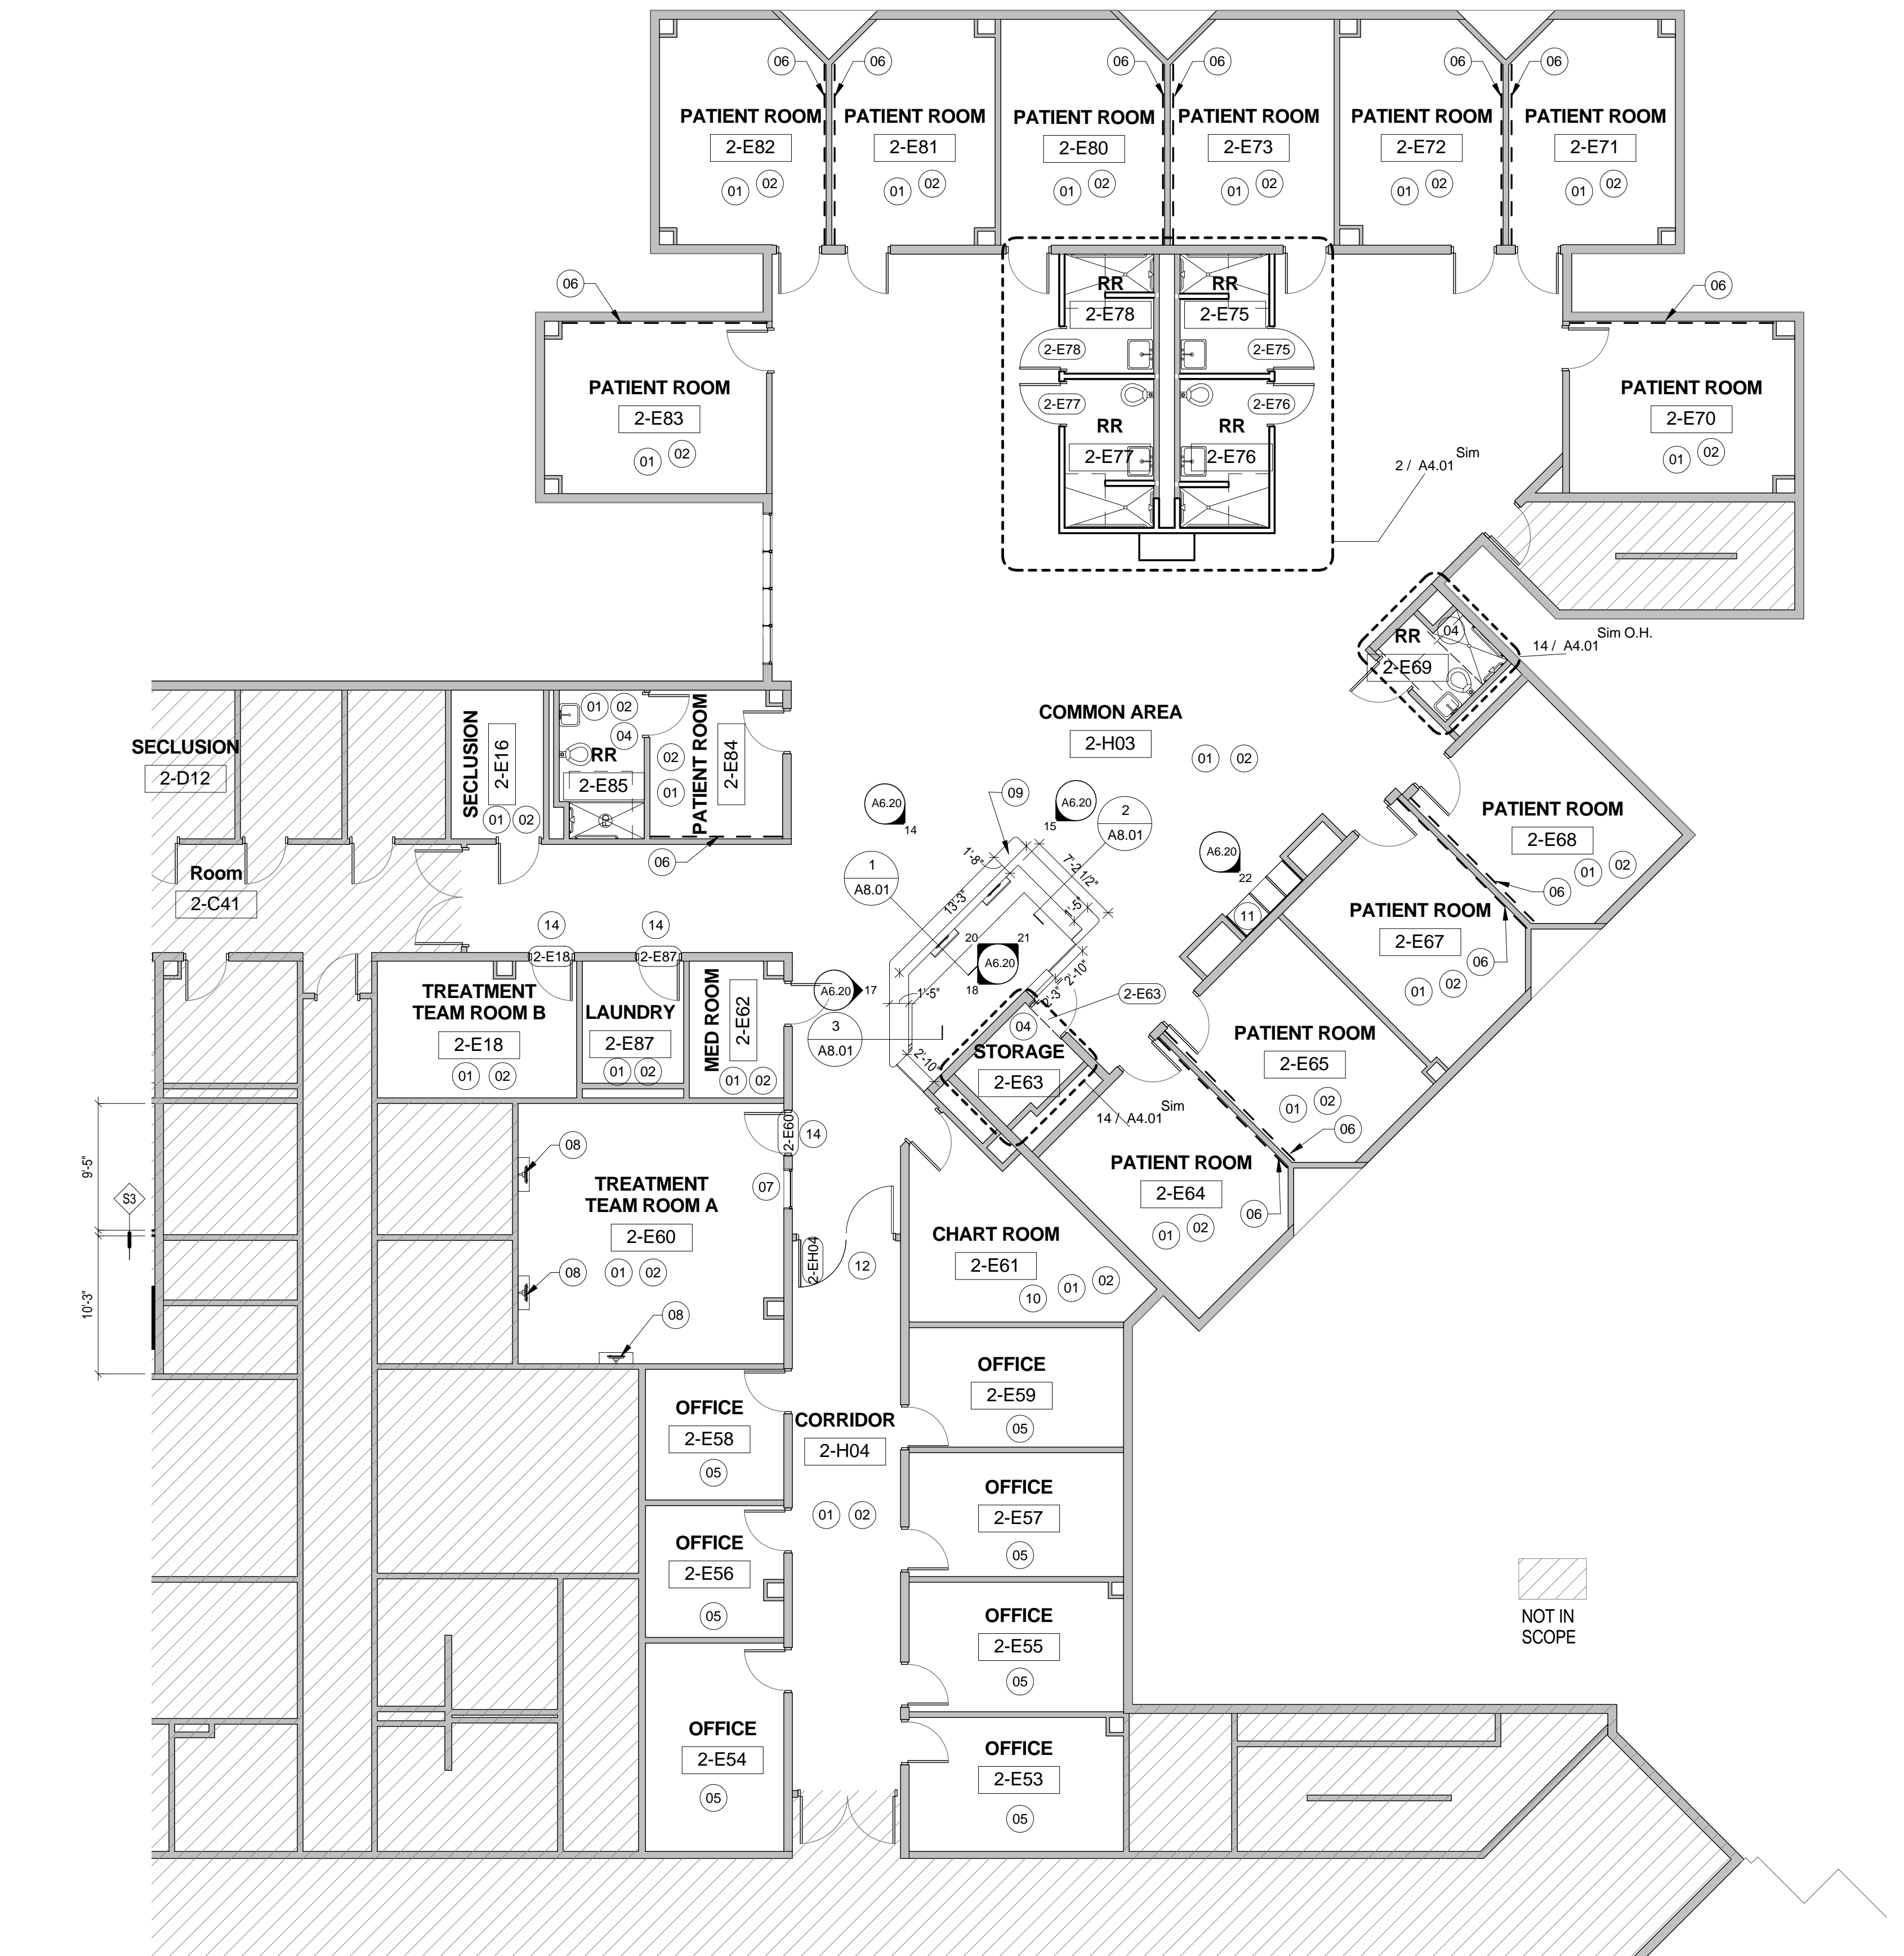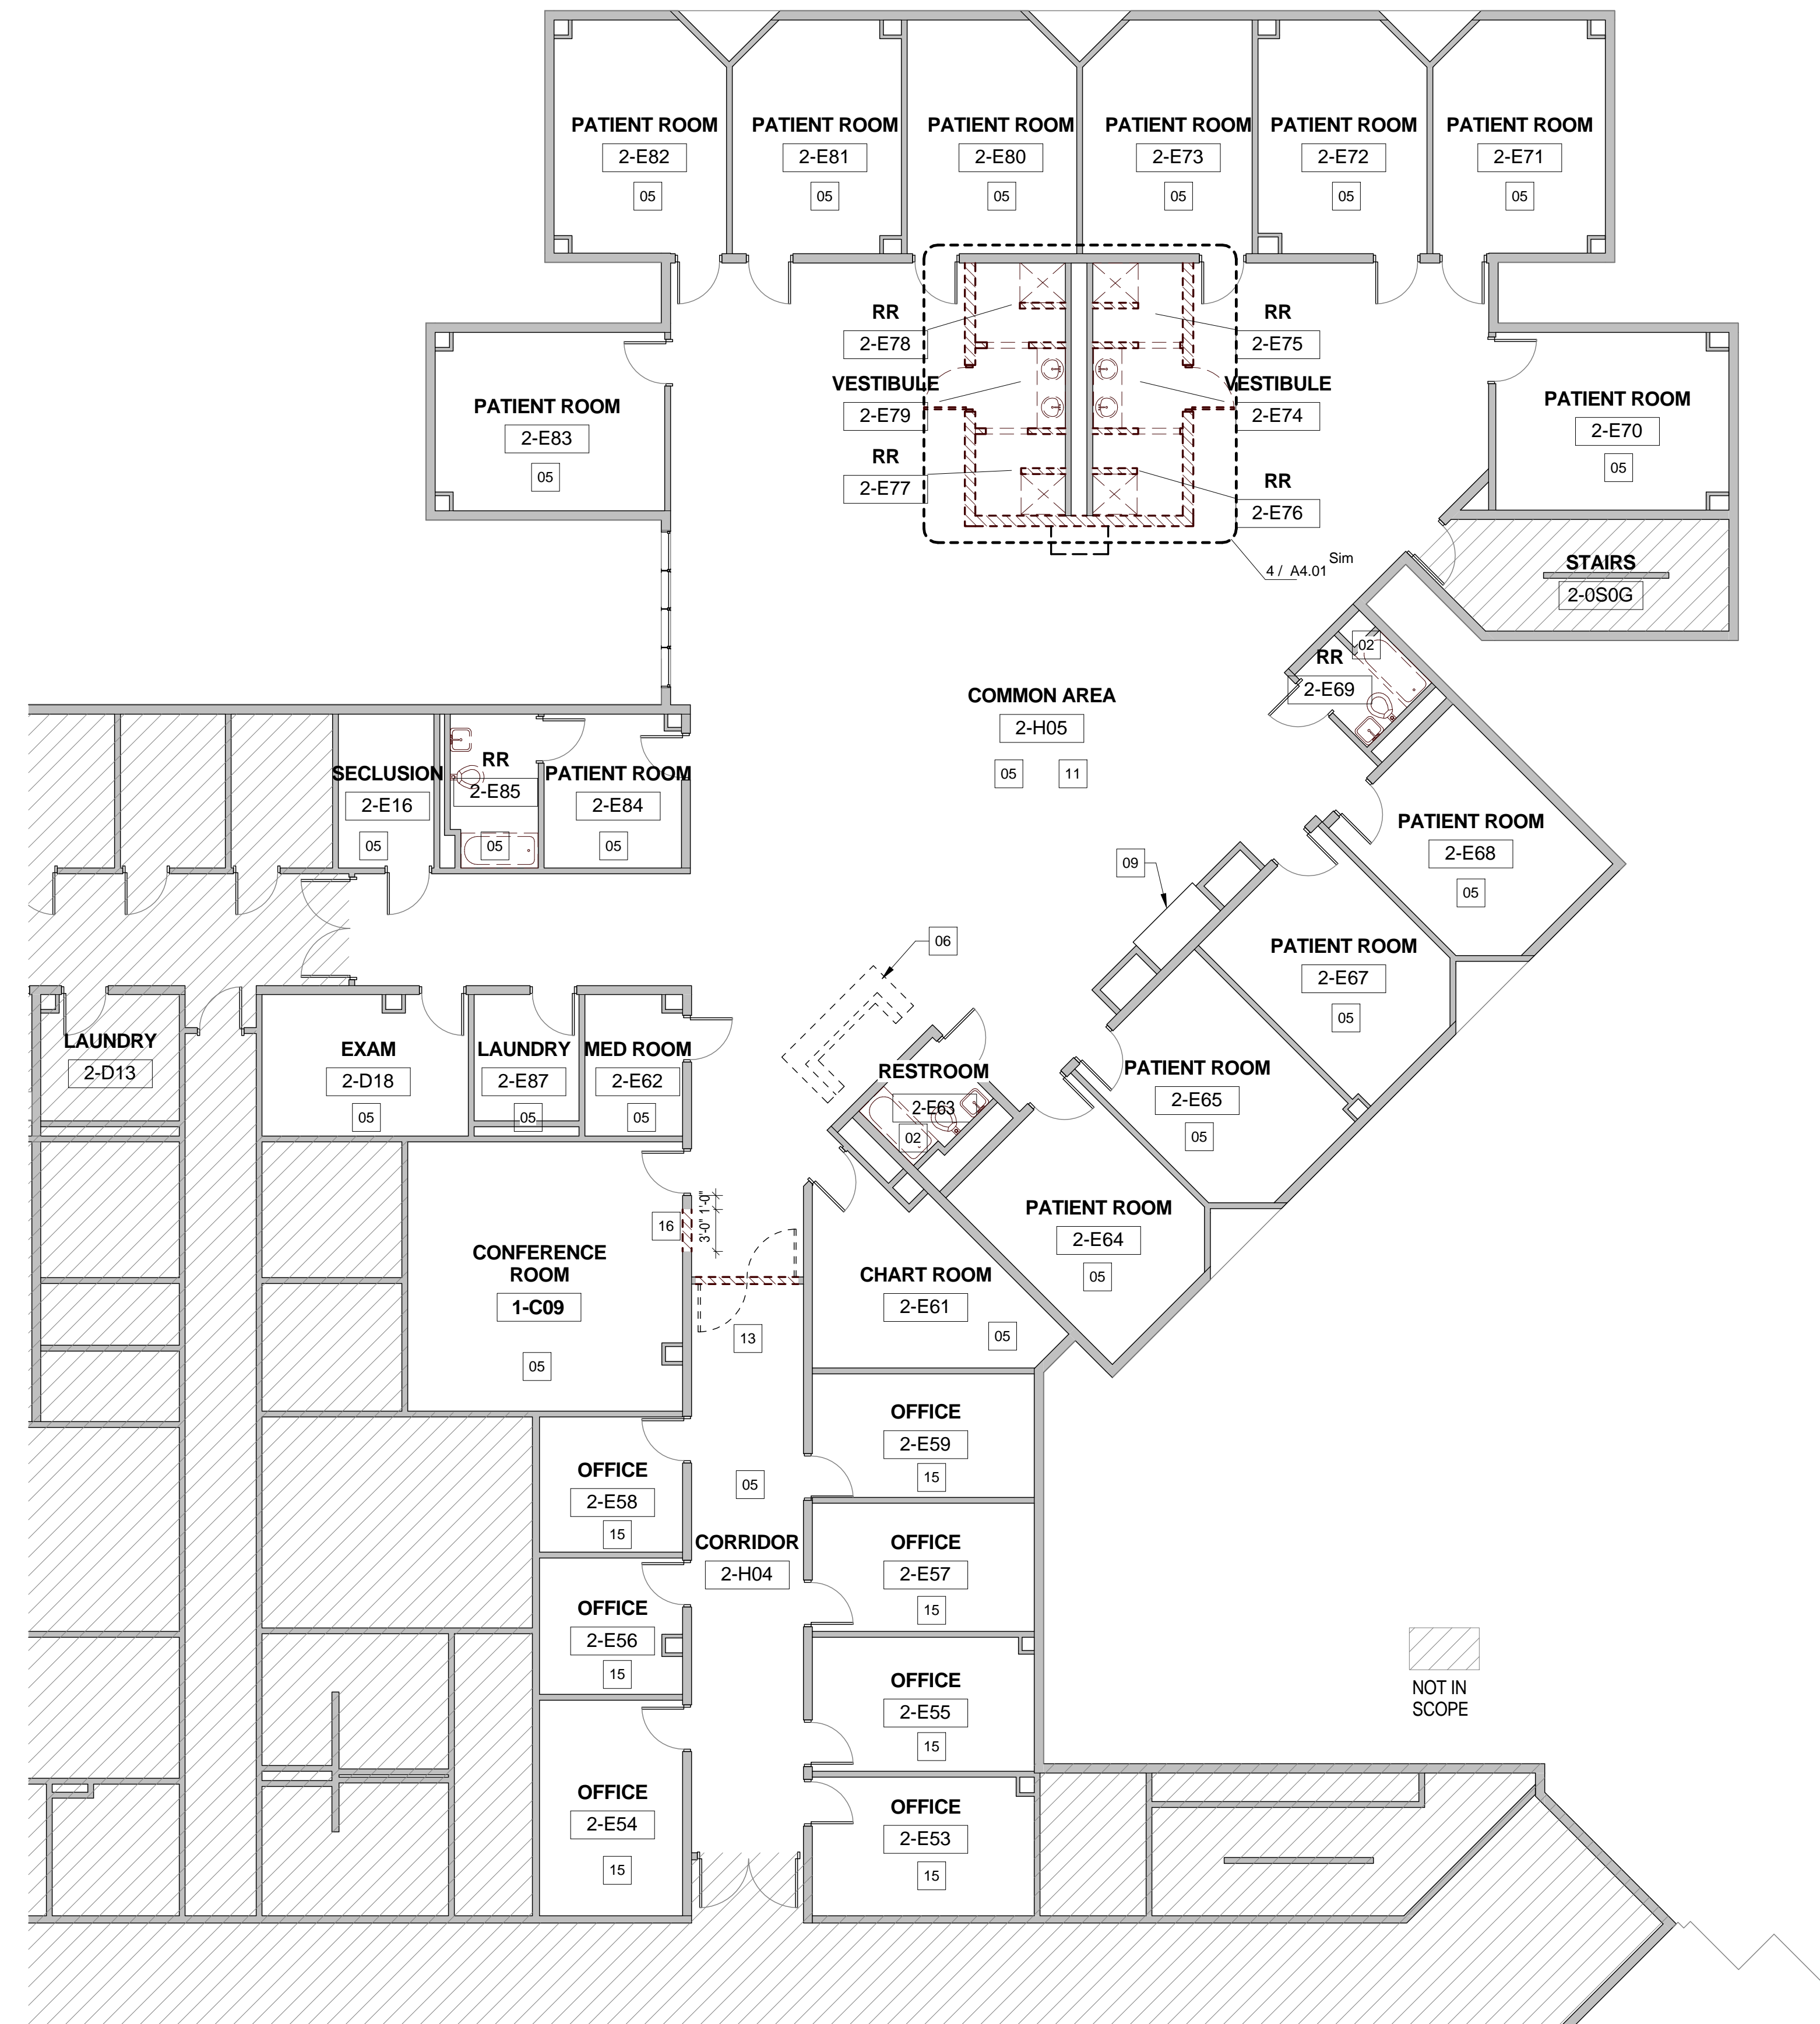

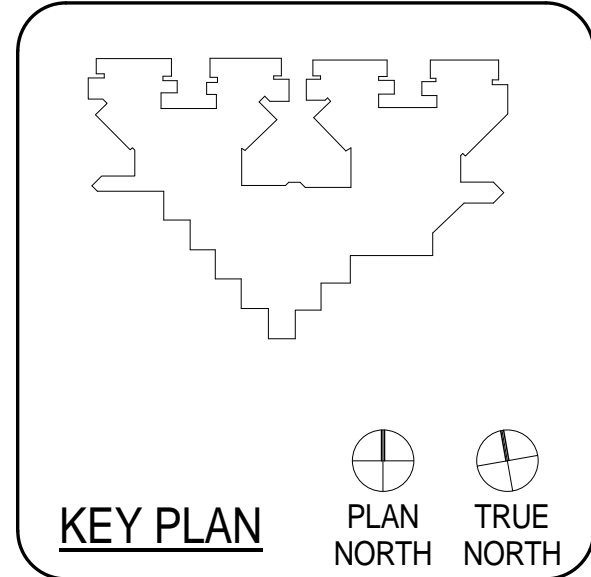

CLIENT		
UT HEALTH		
PROJECT NUMBER		
16106		
DATE: OCTOBER 14, 2016		
DRAWN BY: Author		
CHECKED BY: Checker		
REVISIONS		
No.	Description	Date

ISSUE FOR BID


**SCHEDULES - THIRD
 FLOOR UNIT 3B**

A2.07B


DOOR SCHEDULE - UNIT 3B															
Mark	PAIR/ SING	DOOR			FRAME			DETAILS				FIRE RATING	Comments		
		SIZE W x H W H	MATL.	ELEV.	SIZE WxH W H	MATL.	SILL	JAMB	HEAD	H.W.					
3-BH10	C	P	7' - 0"	7' - 0"	EXISTIN G	2	7' - 4"	7' - 4"	EXIST		2/A2.07B	3/A2.07B	SEE BELOW	N/A	SALVAGE EXISTING HARDWARE AND REINSTALL; RE-USE EXISTING GLASS LITE; EXISTING FRAME W/ NEW PAINT FINISH, RE: ALTERNATE NO. 3B-05
3-B53	B	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	EXIST.		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR
3-B57	B	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	EXIST.		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR
3-B58	B	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	EXIST.		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR
3-B69	A	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	HM		2/A2.07B	3/A2.07B	SEE BELOW	N/A	
3-B68	A	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	HM		2/A2.07B	3/A2.07B	SEE BELOW	N/A	
3-B66	A	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	HM		2/A2.07B	3/A2.07B	SEE BELOW	N/A	
3-B67	A	S	3' - 0"	7' - 0"	SC WD	1	3' - 4"	7' - 4"	HM		2/A2.07B	3/A2.07B	SEE BELOW	N/A	

DOOR HARDWARE IS TO "MATCH EXISTING", BUT SHOULD CONSIST OF THE FOLLOWING COMPONENTS:


- A. (1) EA. SELECT HINGES SL57 FULL-SURFACE GEARED CONTINUOUS HINGES
- B. (1) EA. "PUSH/PULL SET TO MATCH EXISTING; INSTALL PUSH PLATE ON INTERIOR (RESTROOM SIDE) OF DOOR, PULL ON EXTERIOR (COMMON AREA SIDE) OF DOOR, AND PROVIDE (1) LOCKSET FOR STAFF USE ON EXTERIOR (COMMON AREA SIDE) OF DOOR TO MATCH EXISTING
- C. (1) EA. IVES WS407CCV (WALL BUMPER)/FS436 (FLOOR DOME) DOOR STOP
- D. (3) EA. IVES SR64 DOOR SILENCERS
- E. NO CLOSERS

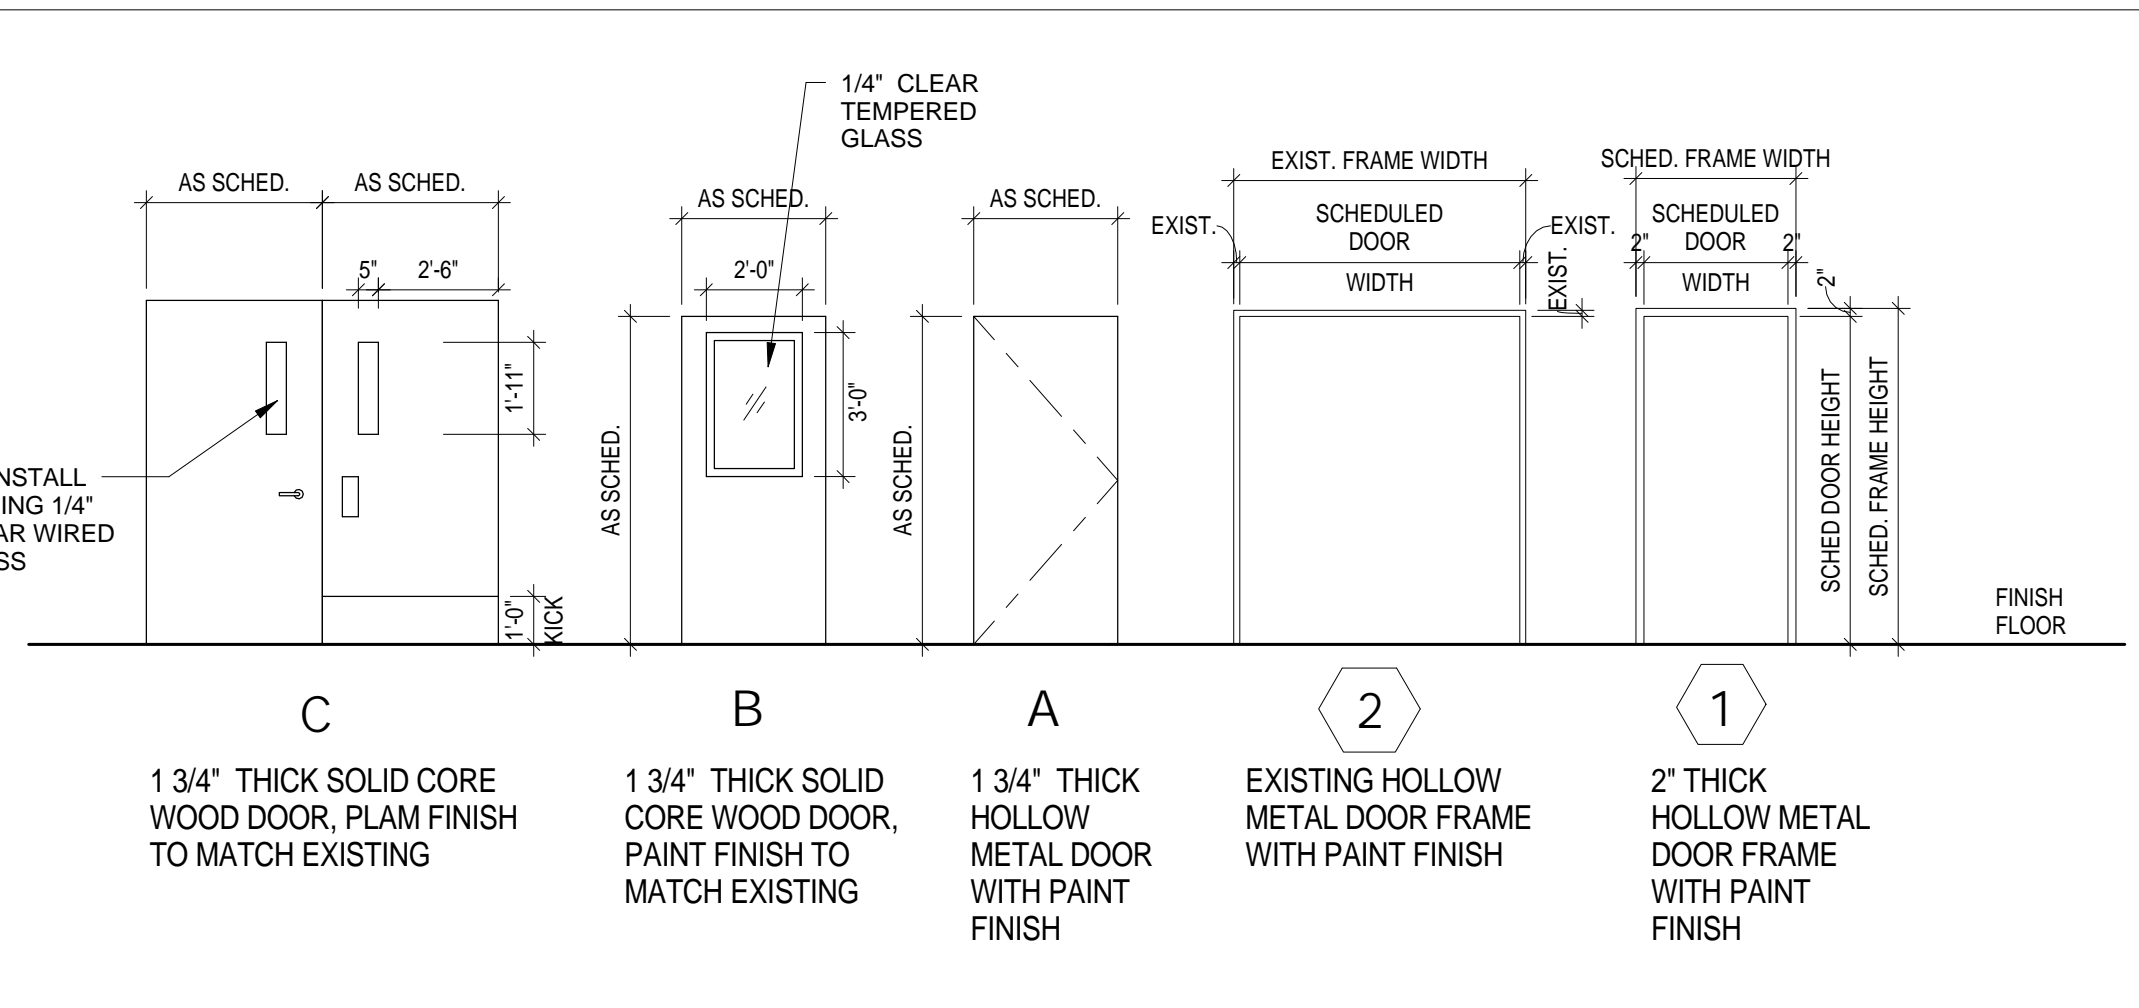

1 DOOR TYPE & FRAME 3B
 1/4" = 1'-0"

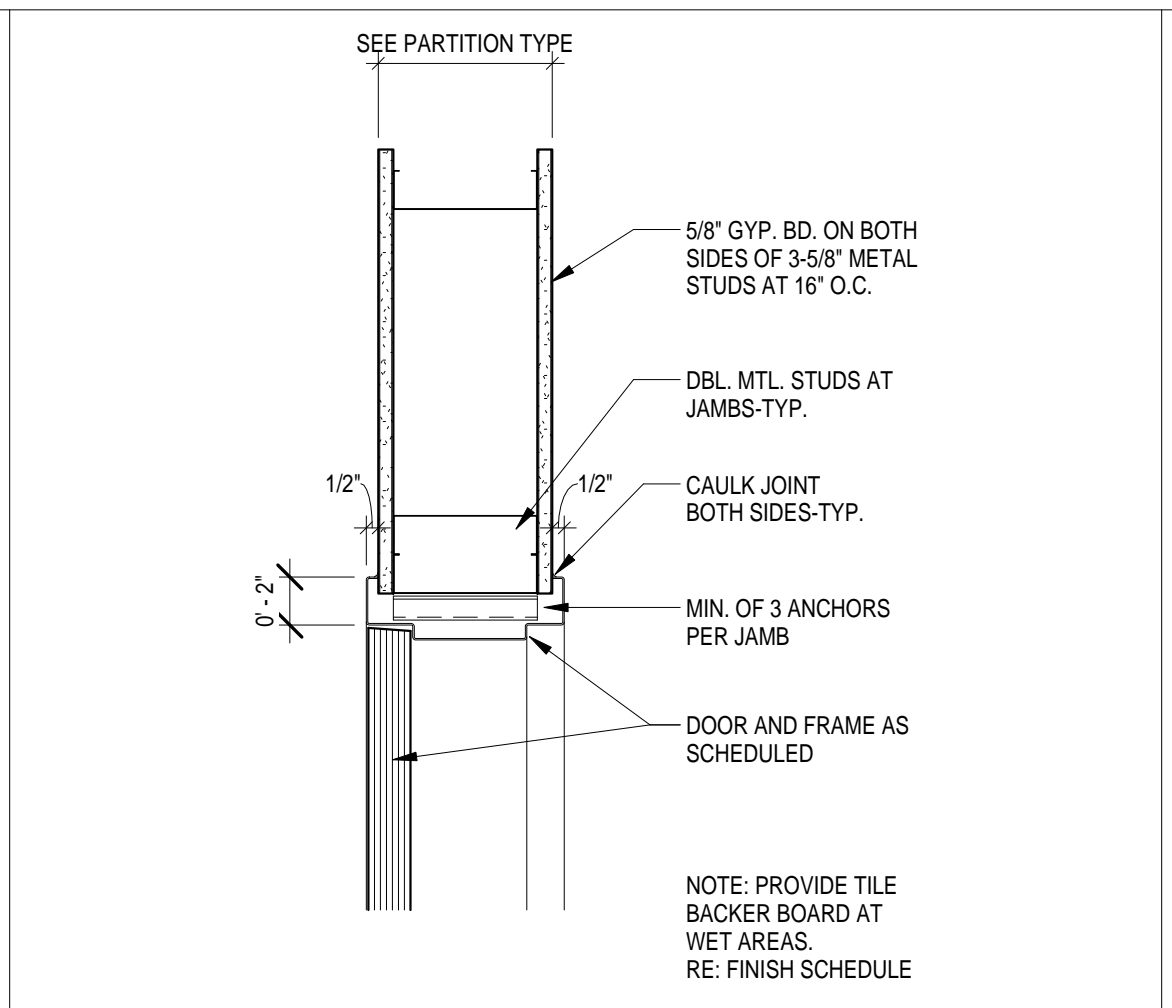

2 INT-STUD-DOOR-HM-JAMB-DTL
 1/12" = 1'-0"

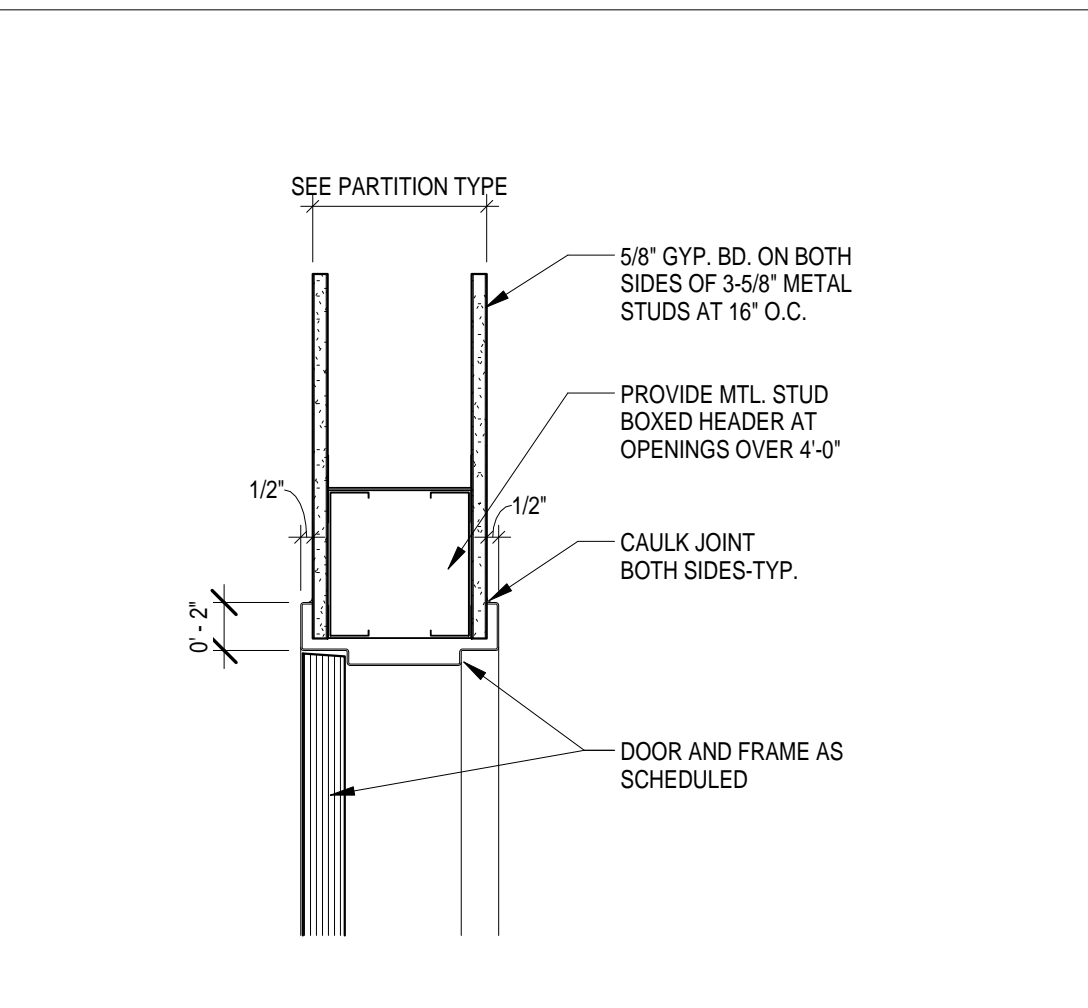

3 INT-STUD-DOOR-HM-HEAD-DTL
 1/12" = 1'-0"

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES.
 - 03 REMOVE EXISTING DOOR AND FRAME; SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN.
 - 04 TYPICAL REMOVE ALL WALL-MOUNTED ACCESSORIES (IE, BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 06 DEMOLISH EXISTING NURSE STATION.
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY.
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE.
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE.
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES; TYPICAL THROUGHOUT.
 - 12 REMOVE EXISTING FLOORING ONLY.
 - 13 ALTERNATE NO. 3B-05; RE: SPECS.
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN.
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 16 ALTERNATE NO. 3B-01; RE: SPECS.

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN.
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN.
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD.
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES.
 - 05 RE-PAIN ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK; FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER.
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL.
 - 07 ALTERNATE NO. 3B-01; RE: SPECS.
 - 08 ALTERNATE NO. 3B-02; RE: SPECS.
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICTED IN DETAILS WITHIN MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA. NO FURF-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION.
 - 10 ALTERNATE NO. 3B-03; RE: SPECS.
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS.
 - 12 ALTERNATE NO. 3B-05; RE: SPECS.

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROMULCH AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING/ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (I.E. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH UL APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RELOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS OR PORTIONS OF WALLS TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENINGS TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW UNITS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL, OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION. REMOVE EXISTING MECHANICAL EQUIPMENT. RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEP SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK. PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE PROCEEDING FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOOR FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCERS AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 9102, TEXAS CIVIL STATUTES (2012) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-965-9669 P
 713-961-4511 F
 TX Firm F-3709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2825 S Wilshire Dr #300
 HOUSTON, TX 77042
 (713) 790 - 7563



**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

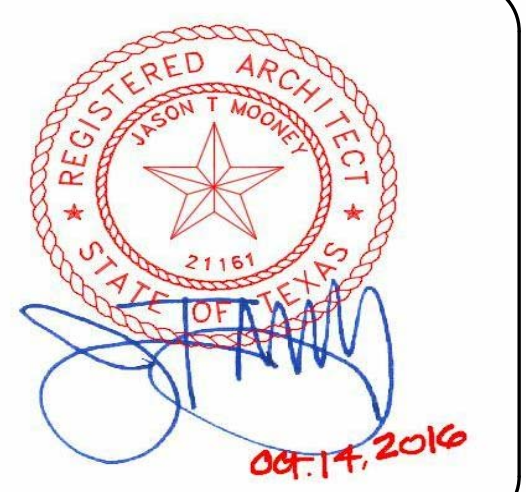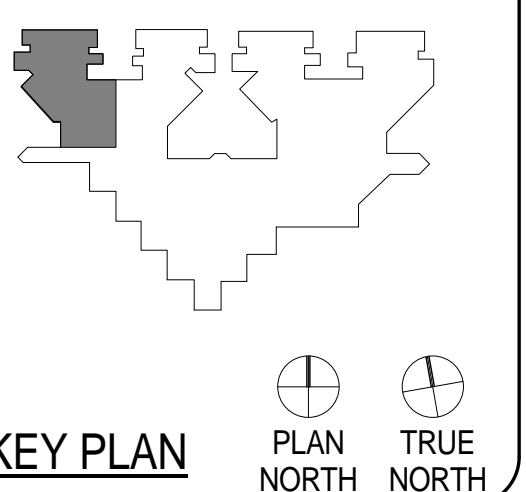

CLIENT		
UT HEALTH		
PROJECT NUMBER		
16106		
DATE: OCTOBER 14, 2016		
DRAWN BY: VICTORIA GARCIA		
CHECKED BY: Checker		
REVISIONS		
No.	Description Date	

ISSUE FOR BID
**THIRD FLOOR UNIT
 3B**

A2.08B

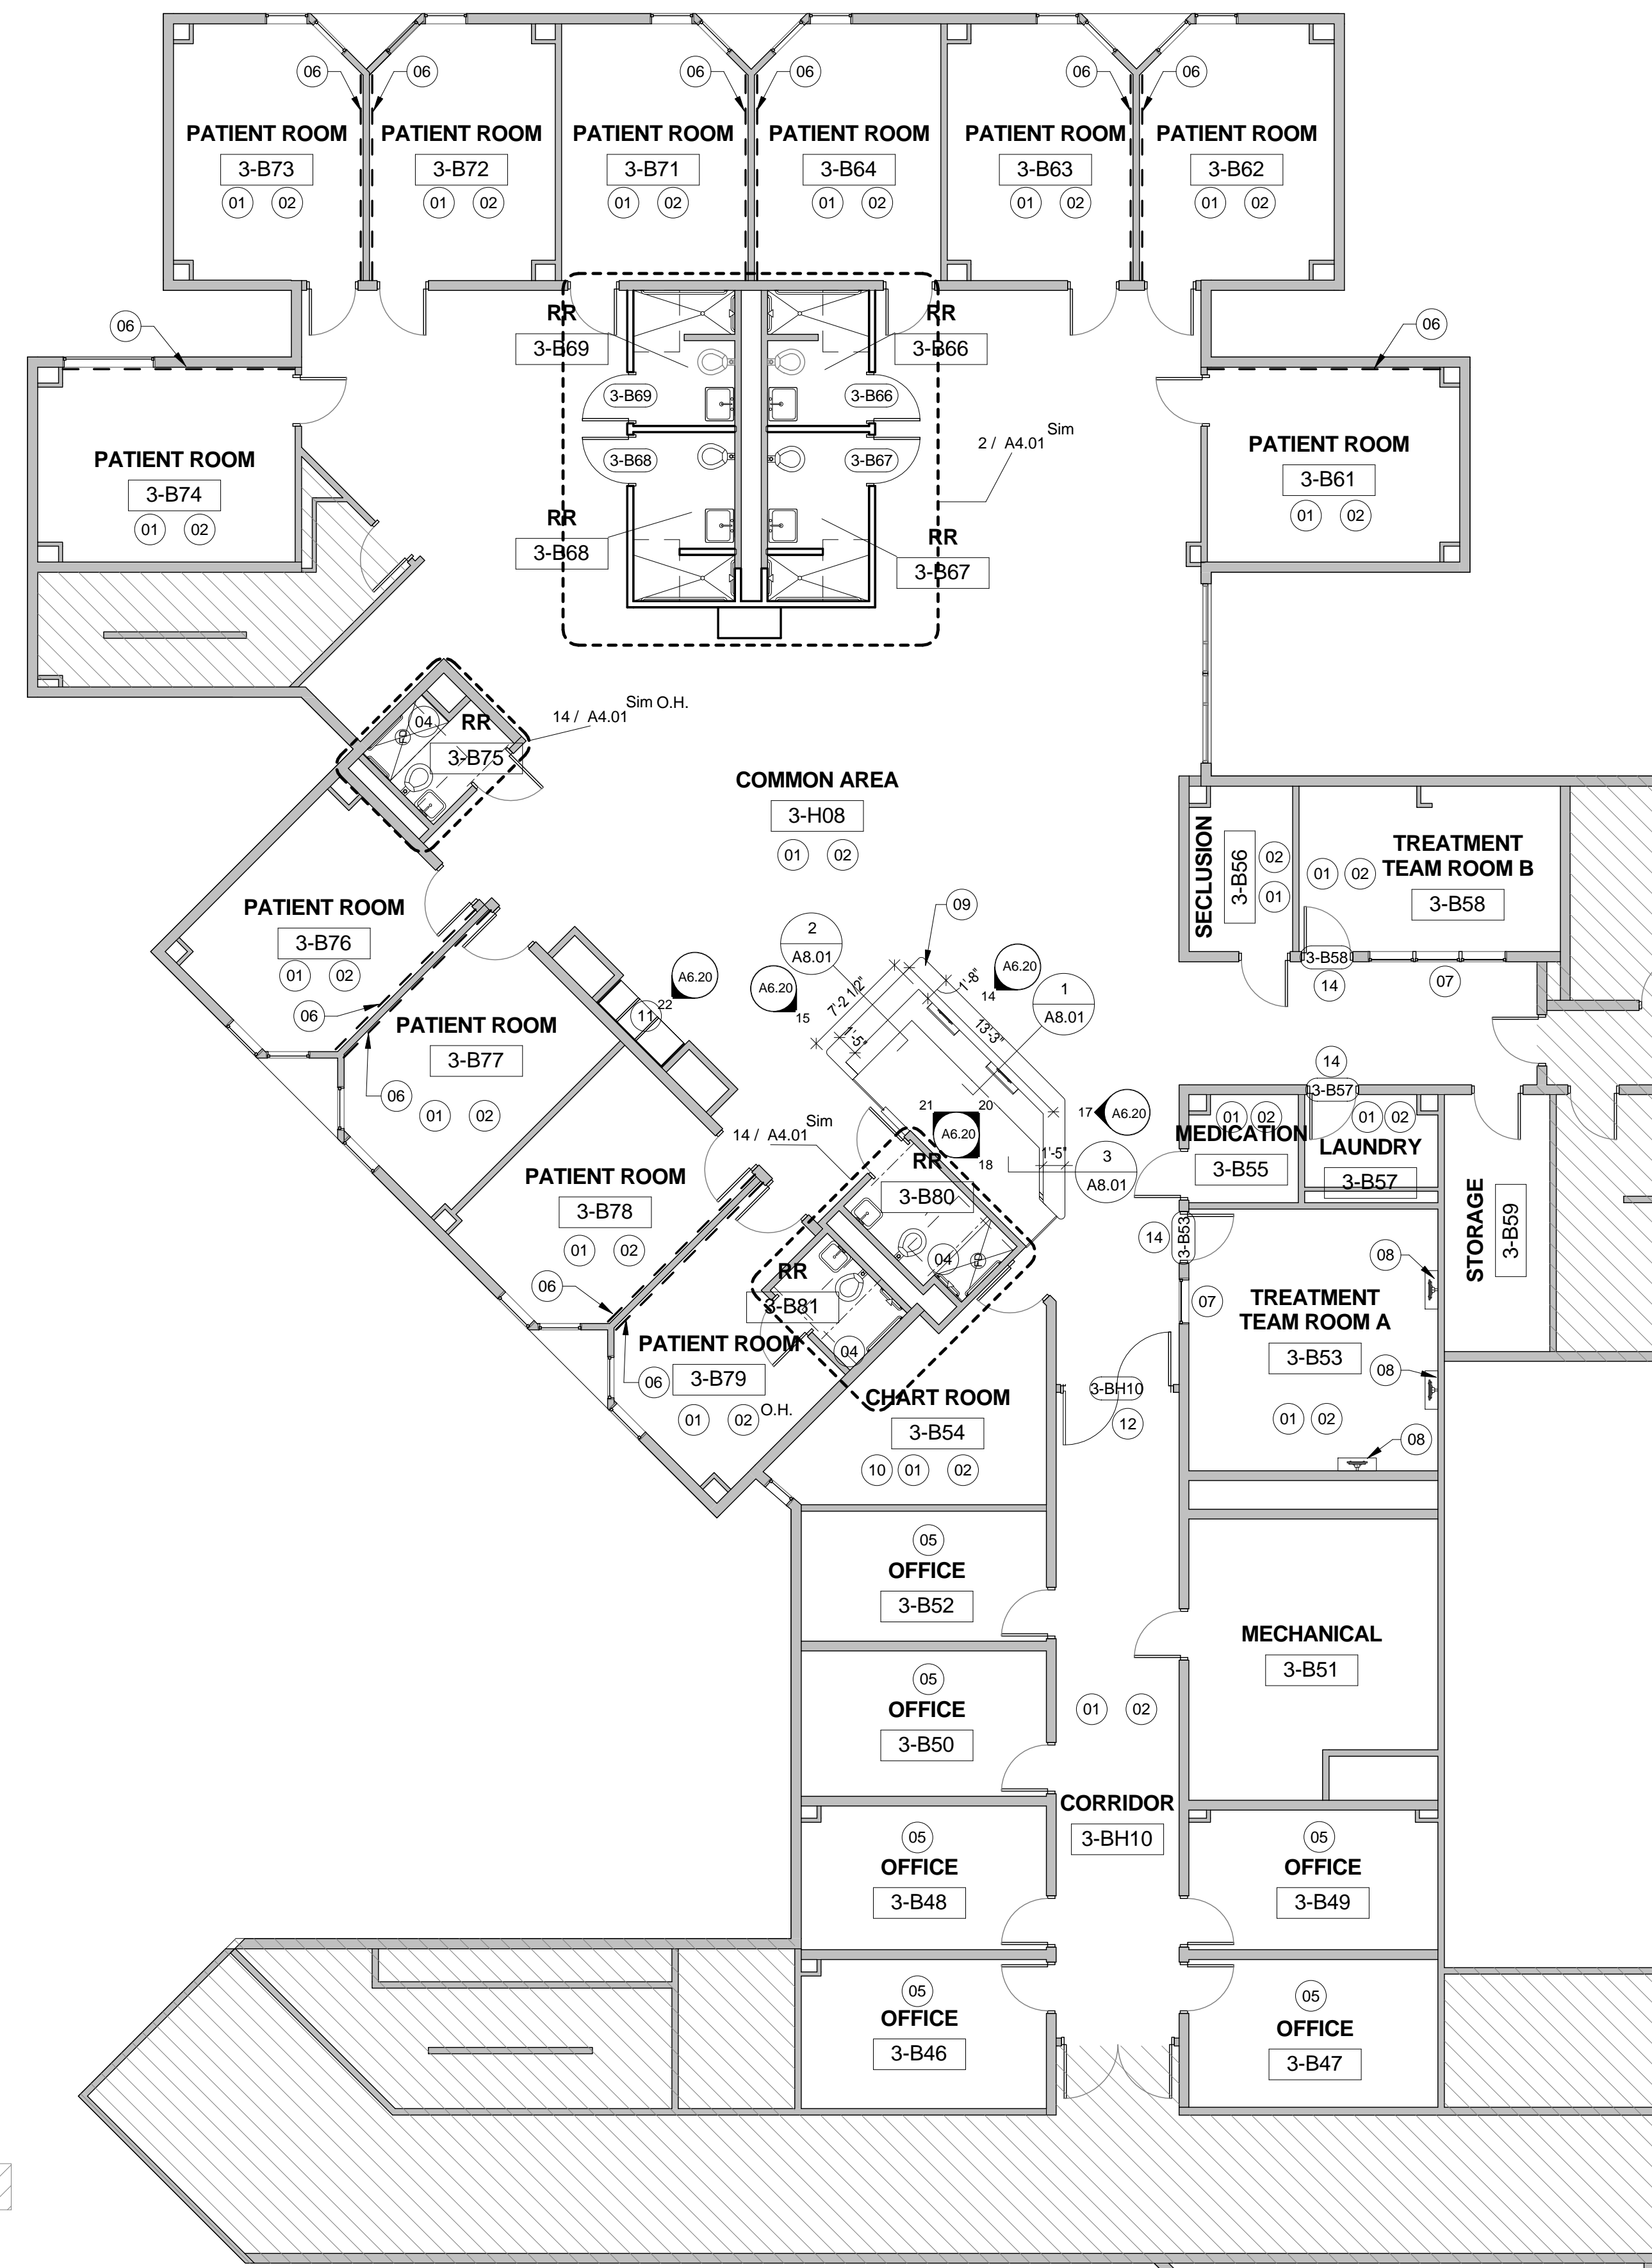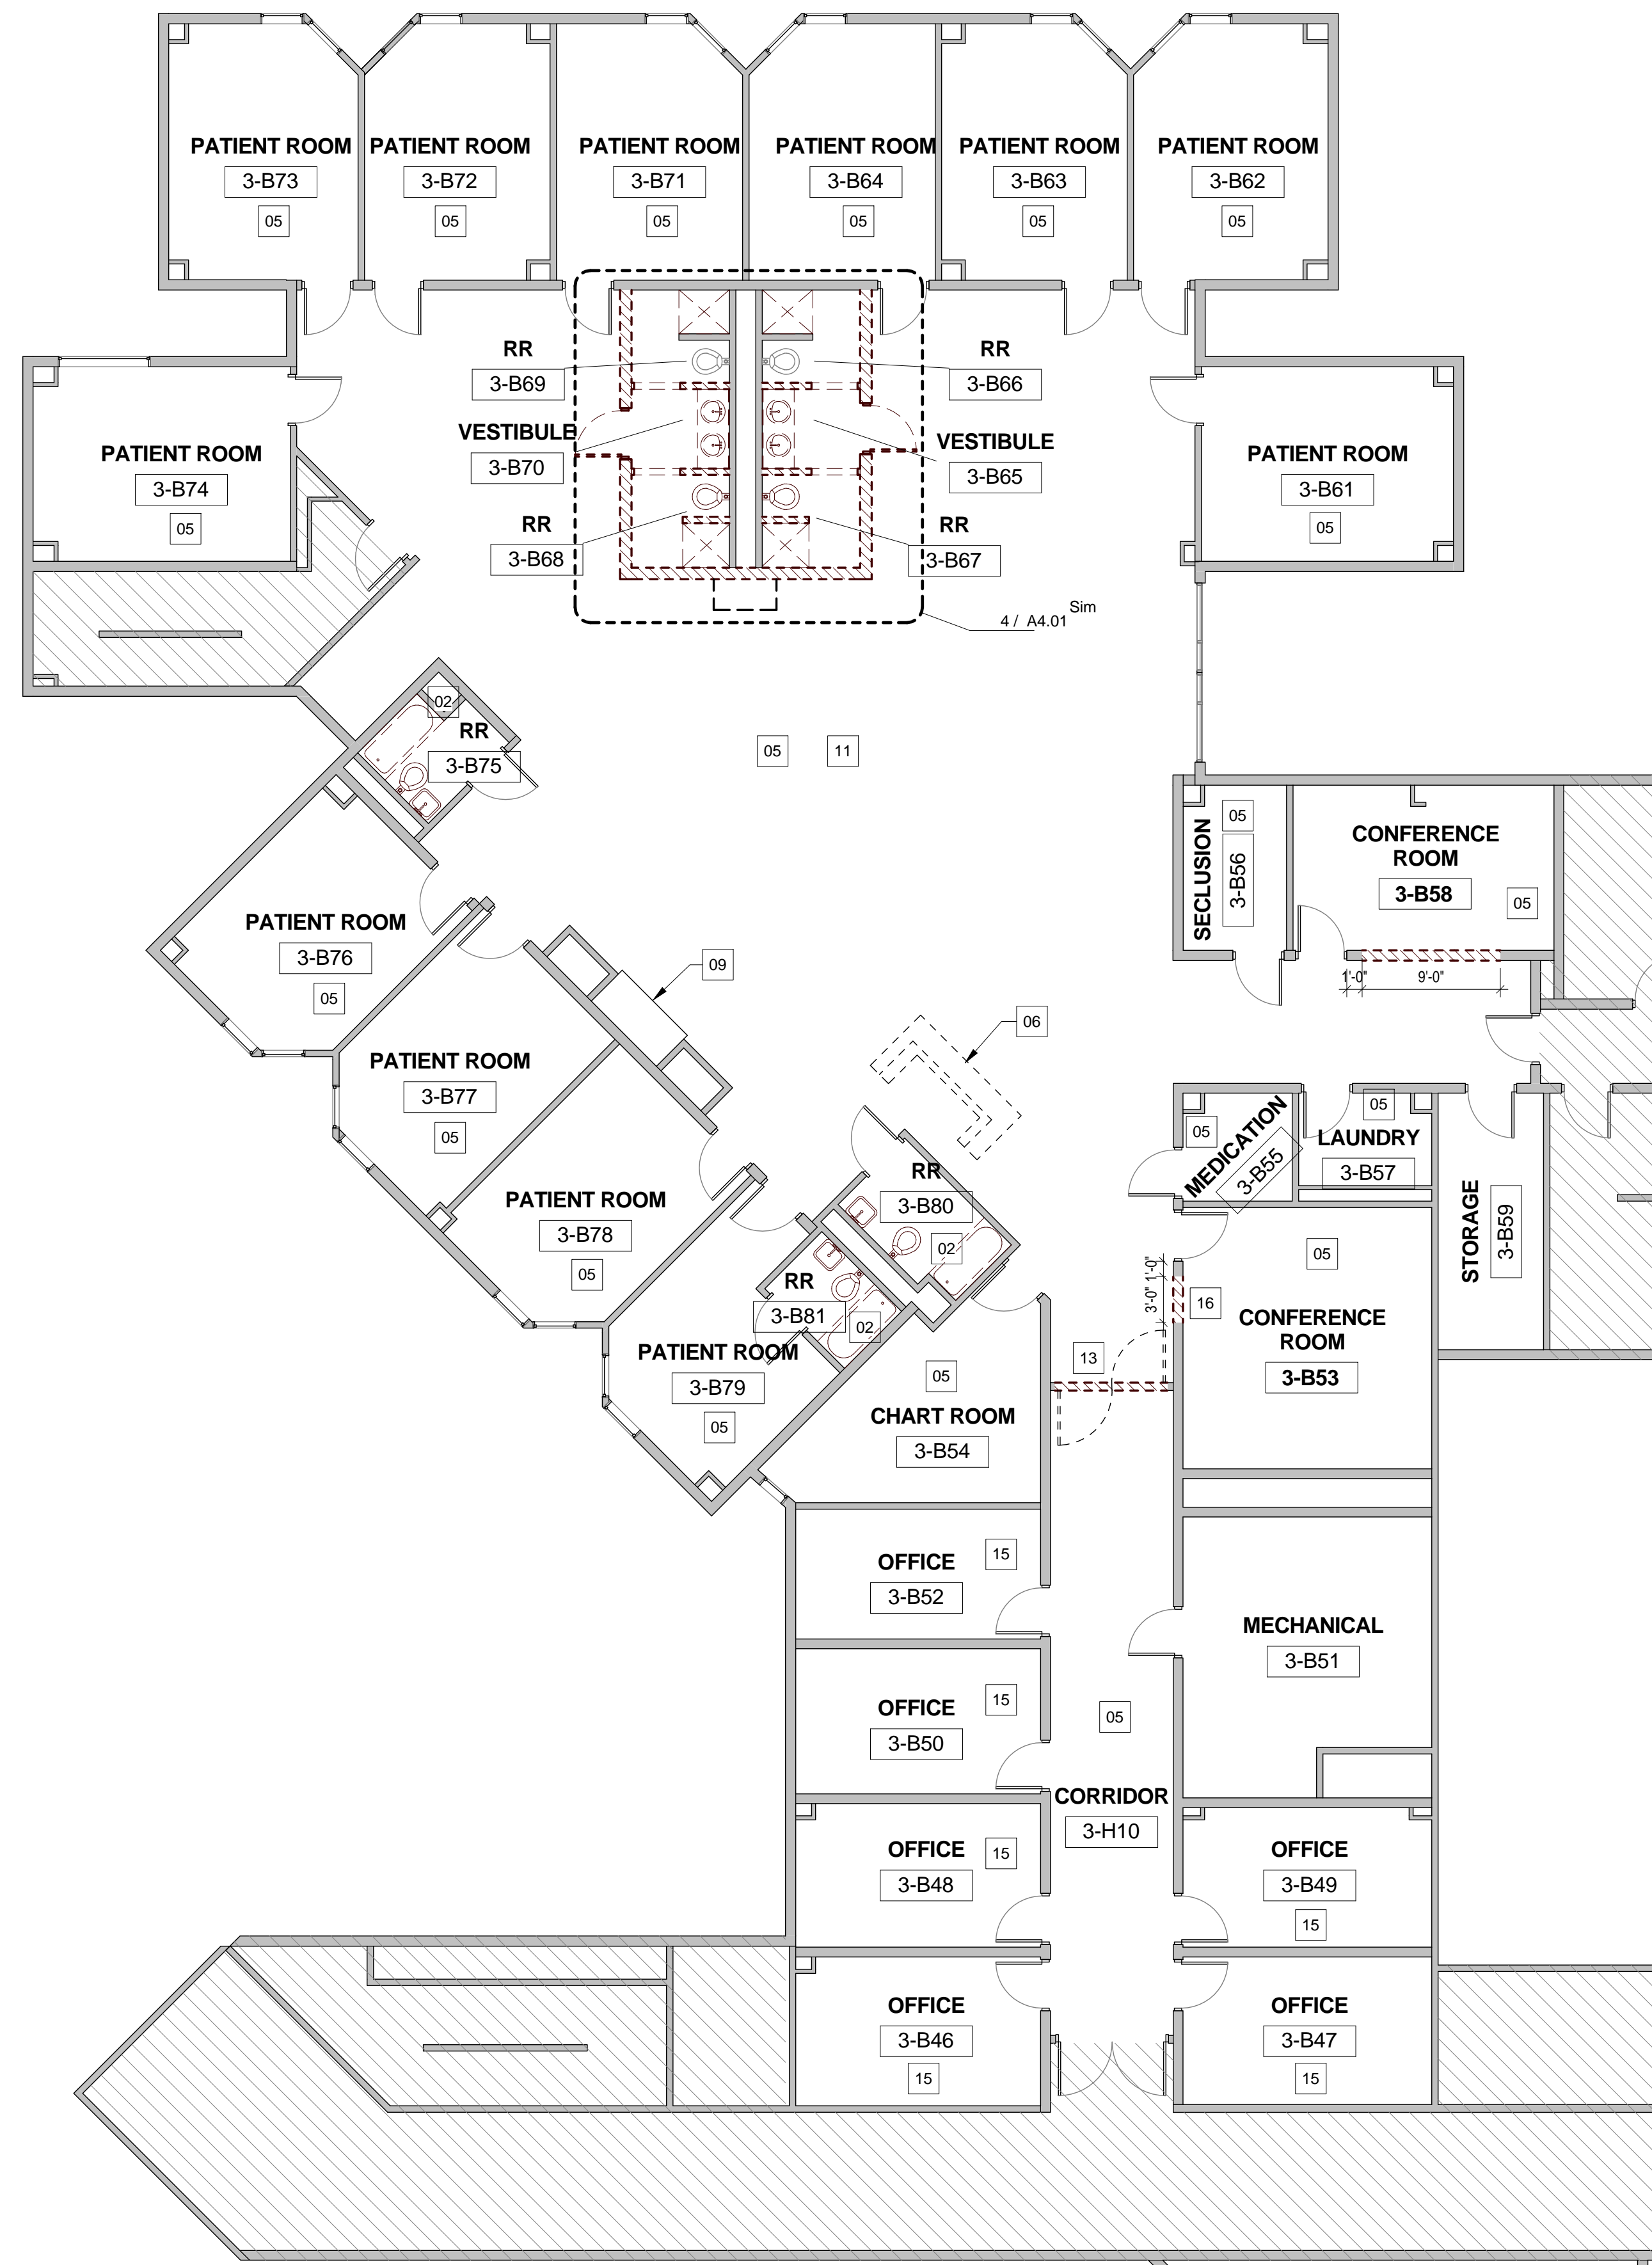

6 DEMOLITION FLOOR PLAN - UNIT 3B
 1/8" = 1'-0"

3 RENOVATION PLAN - UNIT 3B
 1/8" = 1'-0"

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL: REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES.
 - 03 REMOVE EXISTING DOOR AND FRAME; SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN.
 - 04 TYPICAL: REMOVE ALL WALL-MOUNTED ACCESSORIES (IE. BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 06 DEMOLISH EXISTING NURSE STATION.
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY.
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE.
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE.
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT.
 - 12 REMOVE EXISTING FLOORING ONLY.
 - 13 ALTERNATE NO. 3C-05; RE: SPECS.
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN.
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 16 ALTERNATE NO. 3C-01; RE: SPECS.

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN.
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN.
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD.
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES.
 - 05 RE-Paint ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK - FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS WITH OWNER.
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL.
 - 07 ALTERNATE NO. 3C-01; RE: SPECS.
 - 08 ALTERNATE NO. 3C-02; RE: SPECS.
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND SPECIFIED IN DETAILS WITHIN MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA, NO FURR-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION.
 - 10 ALTERNATE NO. 3C-03; RE: SPECS.
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS.
 - 12 ALTERNATE NO. 3C-06; RE: SPECS.

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROLOGICAL AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (IE. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH U.L. APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVICING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SHUT OFF TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RELOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS (OR PORTIONS OF WALLS) TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW UNITS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION; REMOVE EXISTING MECHANICAL EQUIPMENT; RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEP SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS, CEILING WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK; PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
2. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
3. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
4. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
5. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
6. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
7. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
8. ALL FLOORS FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
9. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
10. PROVIDE VINYL REDUCER AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
11. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
12. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 9102, TEXAS CIVIL STATUTES (2013) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-965-9569 P
 713-961-4571 F
 TX Firm # F-1709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2625 Westfield Dr #300
 HOUSTON, TX 77042
 (713) 790 - 7563



HARRIS COUNTY PSYCHIATRIC CENTER RENOVATION UNITS: 1C, 2E, 3B, 3C, 3D & 3E

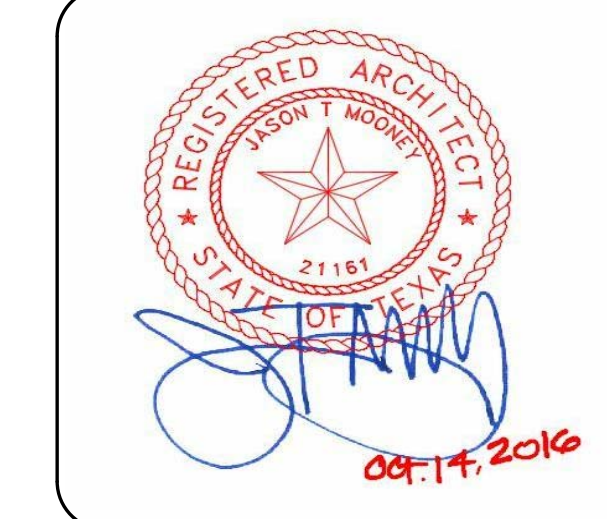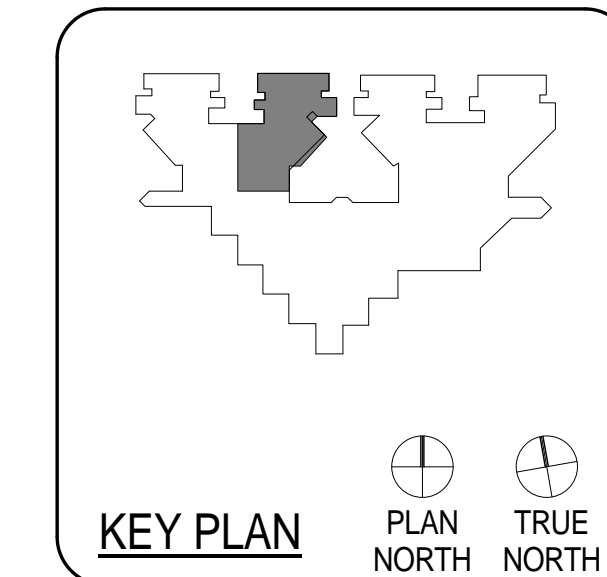

CLIENT UT HEALTH		
PROJECT NUMBER 16106		
DATE: OCTOBER 14, 2016		
DRAWN BY: VICTORIA GARCIA		
CHECKED BY: Checker		
REVISIONS		
No.	Description	Date

ISSUE FOR BID
THIRD FLOOR UNIT 3C

A2.11C

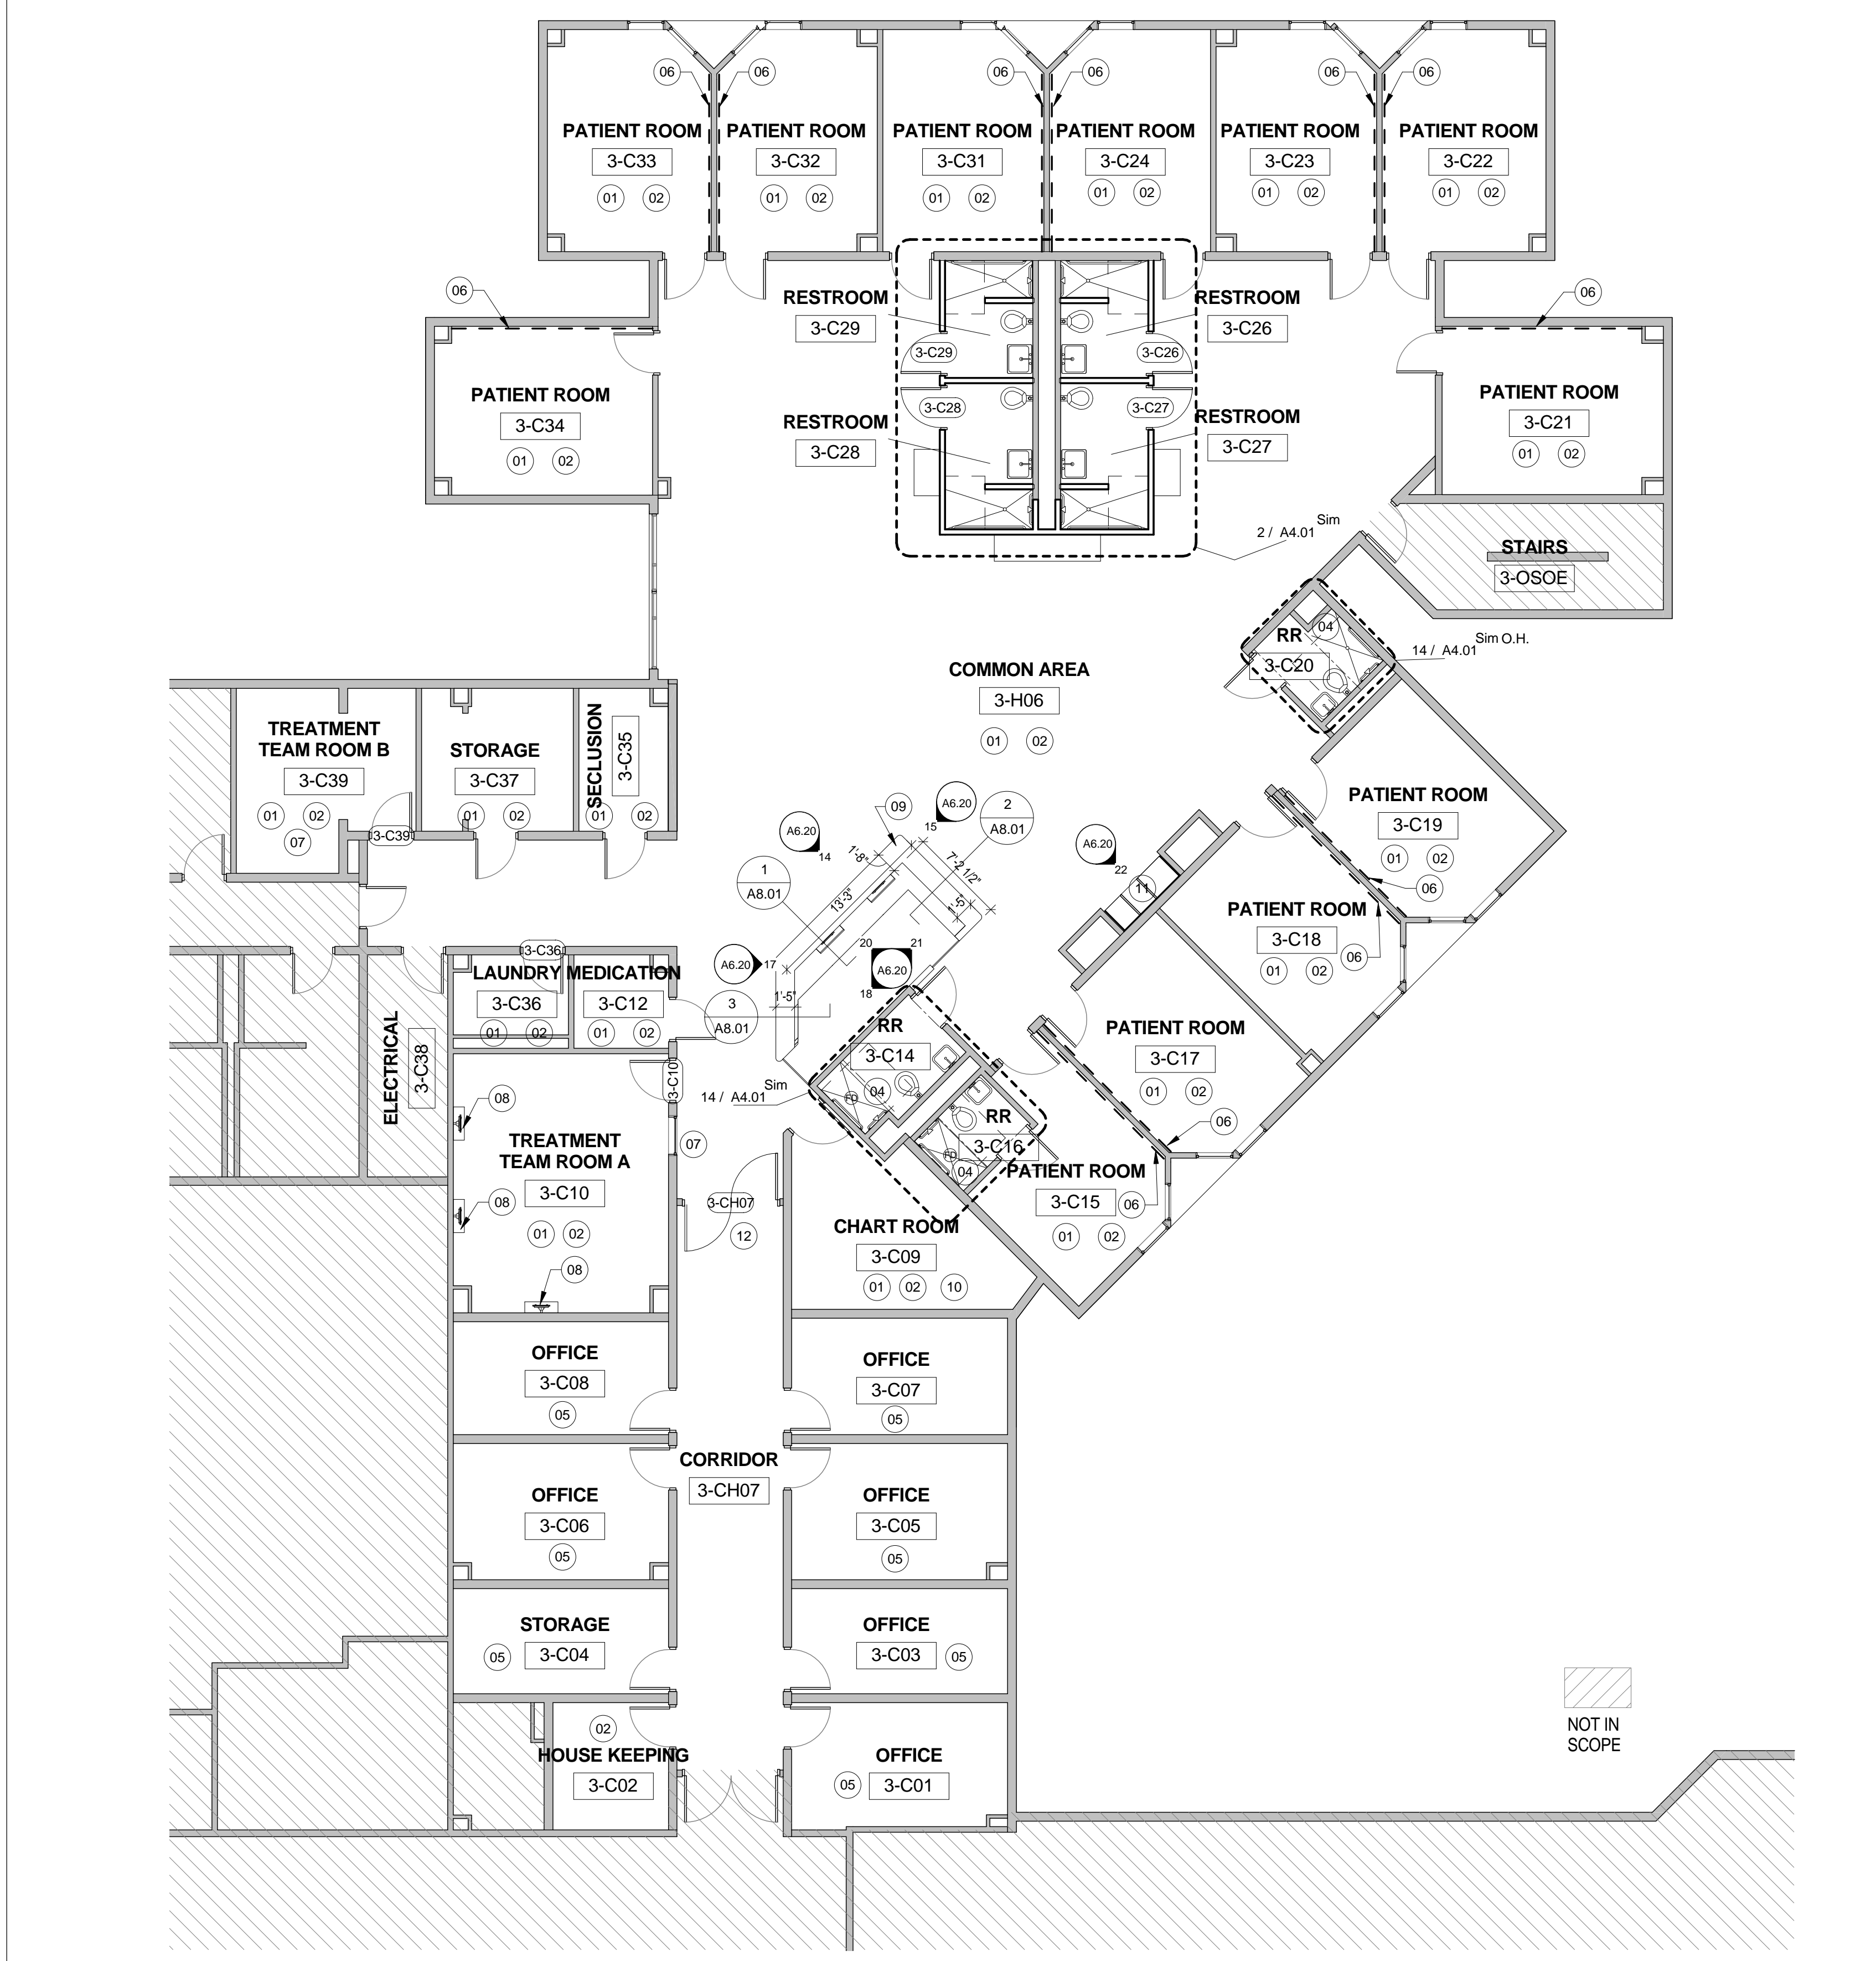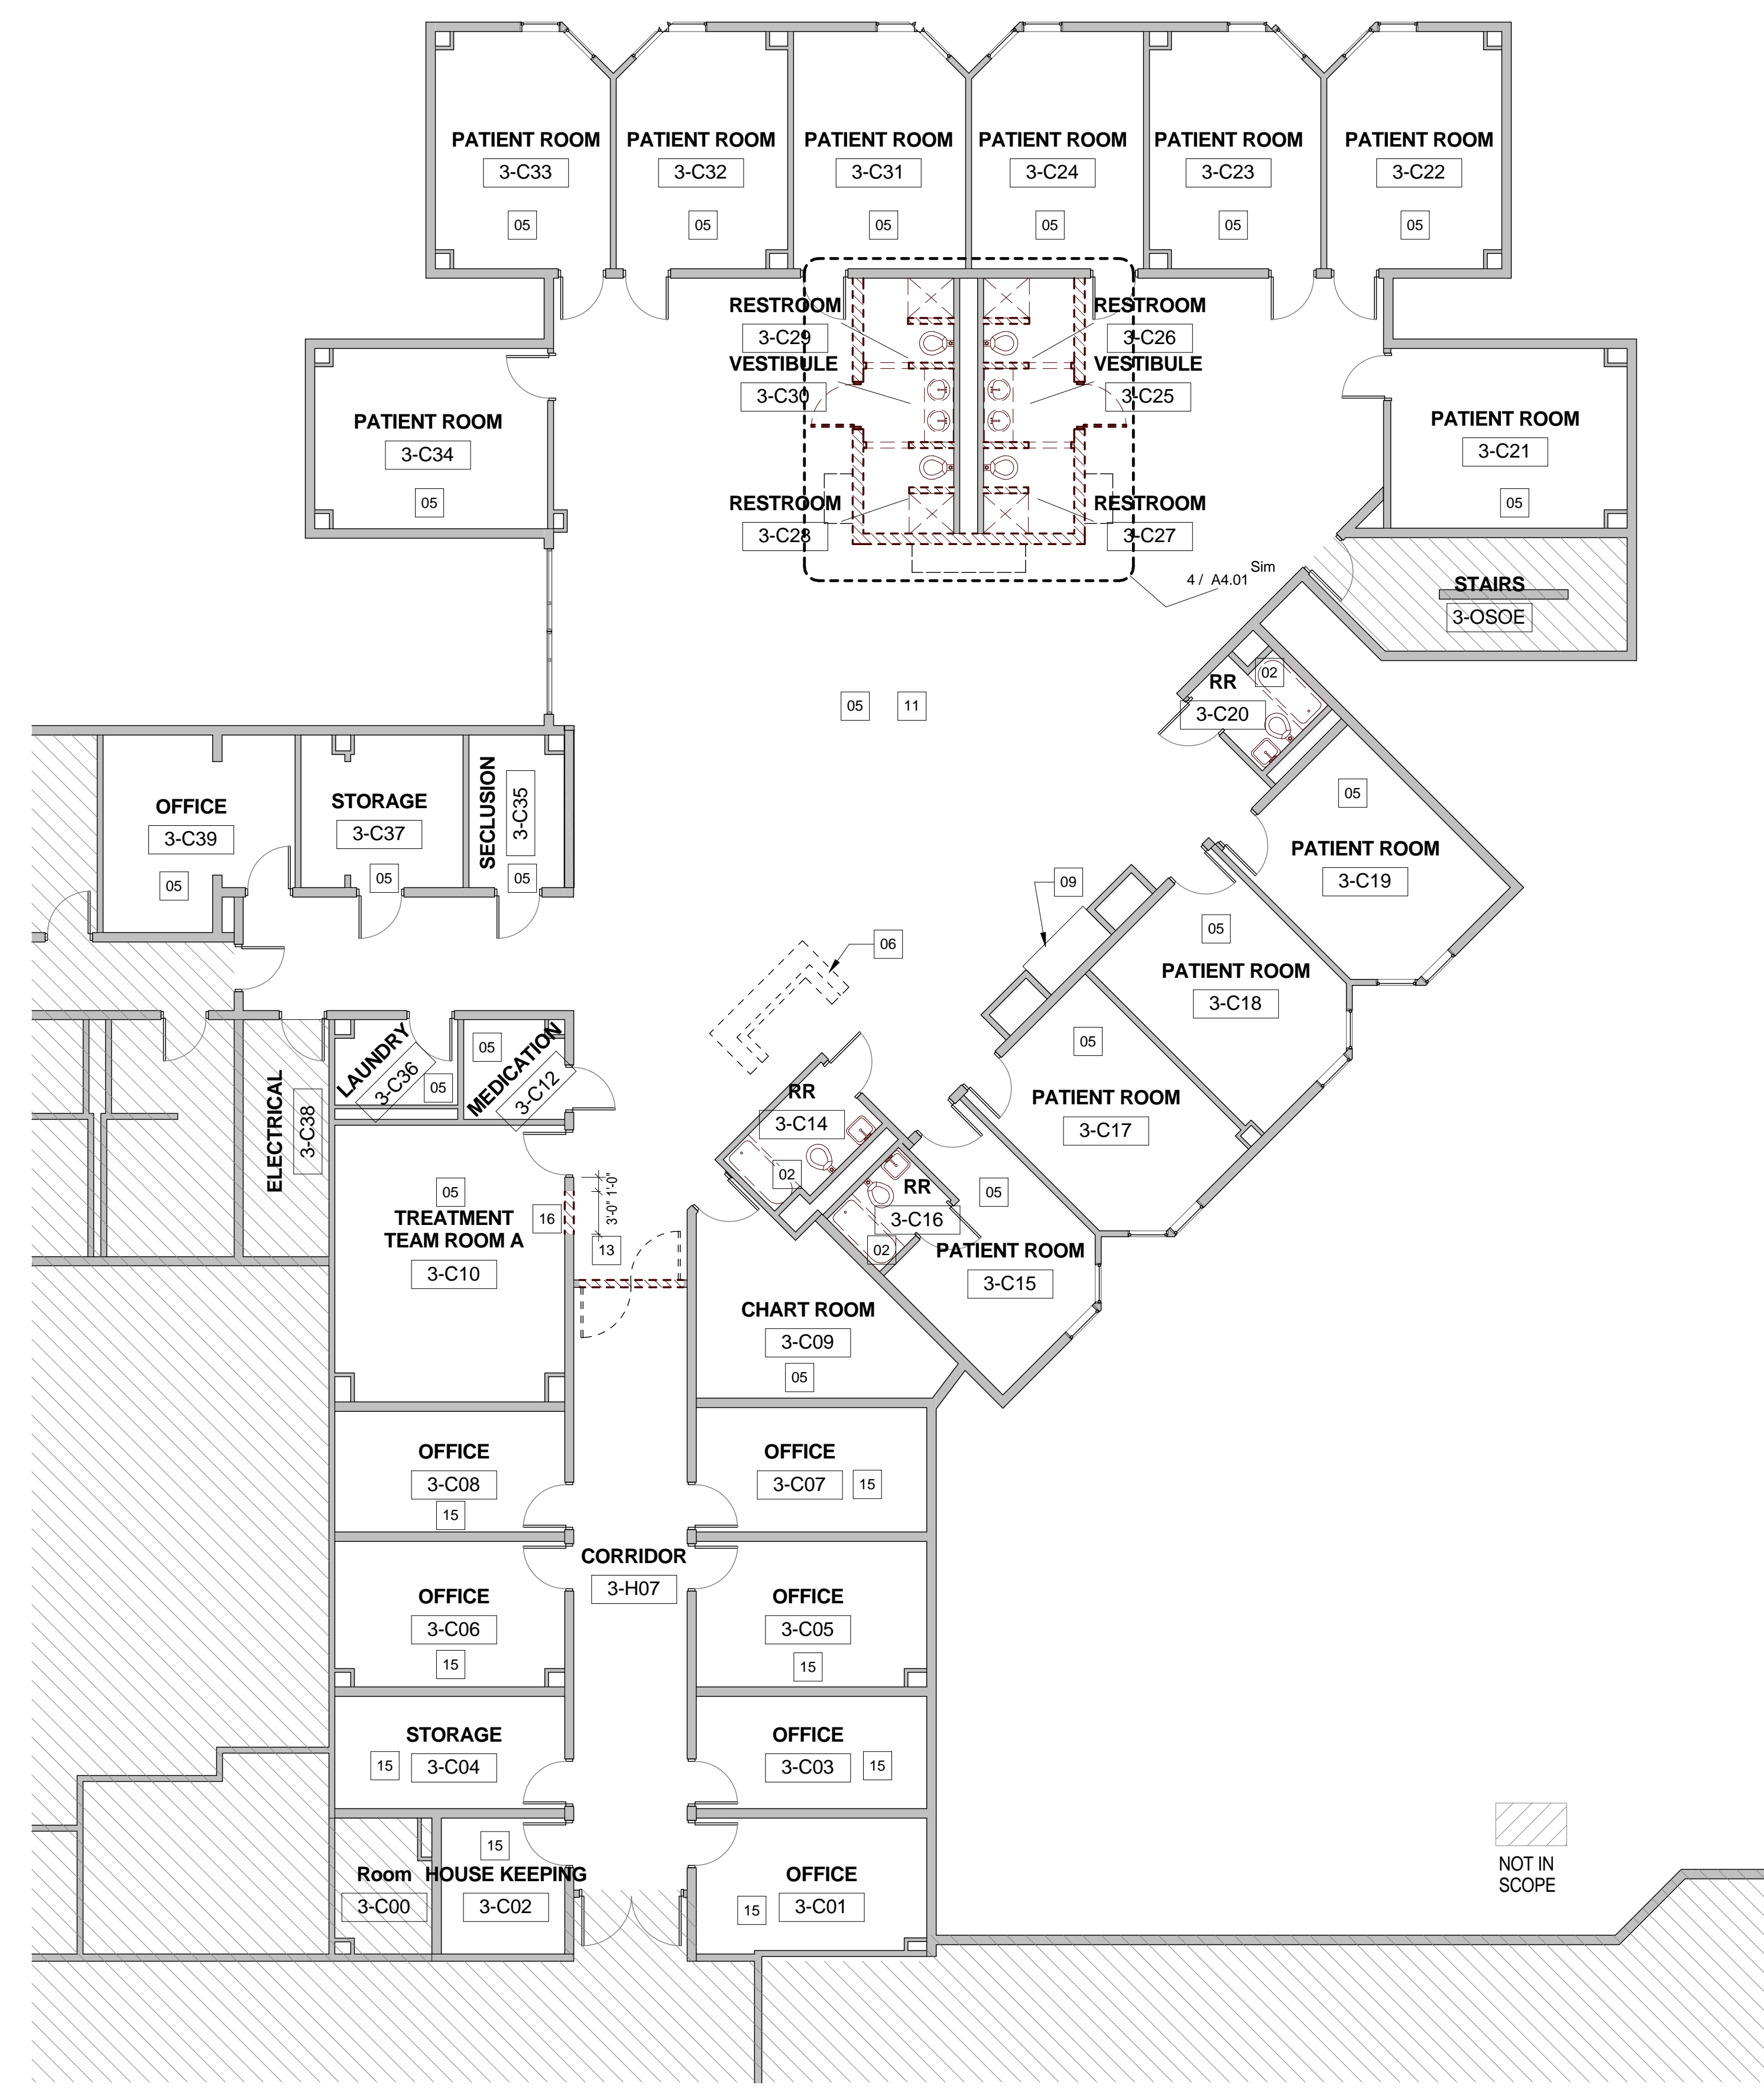

6 DEMOLITION FLOOR PLAN - UNIT 3C
 1/8" = 1'-0"

3 RENOVATION PLAN - UNIT 3C
 1/8" = 1'-0"

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL: REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES
 - 03 REMOVE EXISTING DOOR AND FRAME; SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN
 - 04 TYPICAL: REMOVE ALL WALL-MOUNTED ACCESSORIES (IE, BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 06 DEMOLISH EXISTING NURSE STATION
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT
 - 12 REMOVE EXISTING FLOORING ONLY
 - 13 ALTERNATE NO.3D-05; RE: SPECS
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 16 ALTERNATE NO.3D-01; RE: SPECS

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES
 - 05 RE-PAIN ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK - FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY) COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL
 - 07 ALTERNATE NO.3D-01; RE: SPECS
 - 08 ALTERNATE NO.3D-02; RE: SPECS
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICTED IN DETAILS WITHIN; MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA, NO FURR-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION
 - 10 ALTERNATE NO.3D-03; RE: SPECS
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS
 - 12 ALTERNATE NO.3D-05; RE: SPECS

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROMULCH AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (IE, MINIMIZE EXCESSIVE NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH U.L. APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVICING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RELOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS (OR PORTIONS OF WALLS) TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW UNTELS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWING OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION. REMOVE EXISTING MECHANICAL EQUIPMENT, RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEP SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS & CEILINGS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK. PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOORS FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCER AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 9102, TEXAS CIVIL STATUTES (2012) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-965-9066 P
 713-961-4571 F
 TX Firm F-3709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2825 S. Wilshire Dr. #300
 HOUSTON, TX 77042
 (713) 790-7563



**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

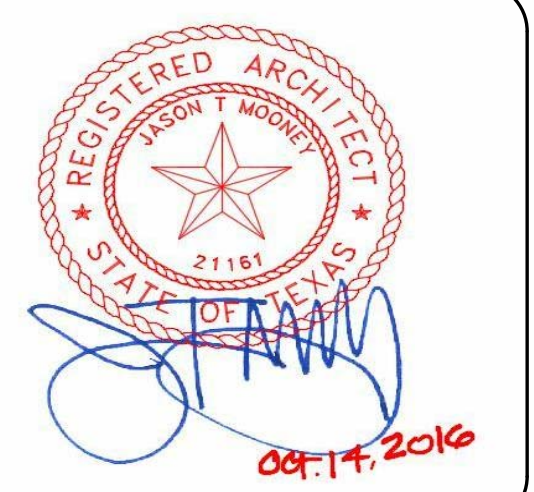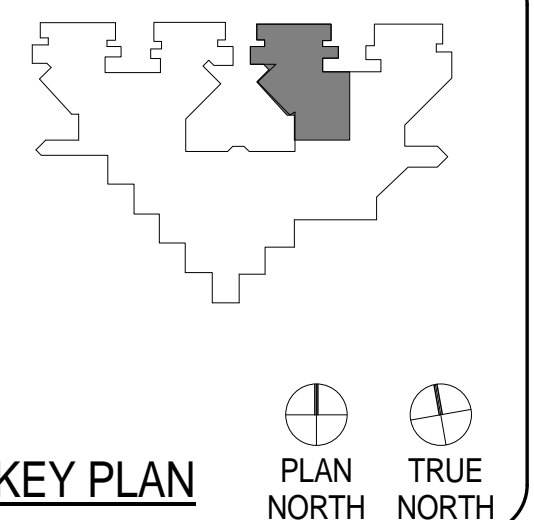


CLIENT		
UT HEALTH		
PROJECT NUMBER		
16106		
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VICTORIA GARCIA	
CHECKED BY:	Checker	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**THIRD FLOOR UNIT
 3D**

A2.14D

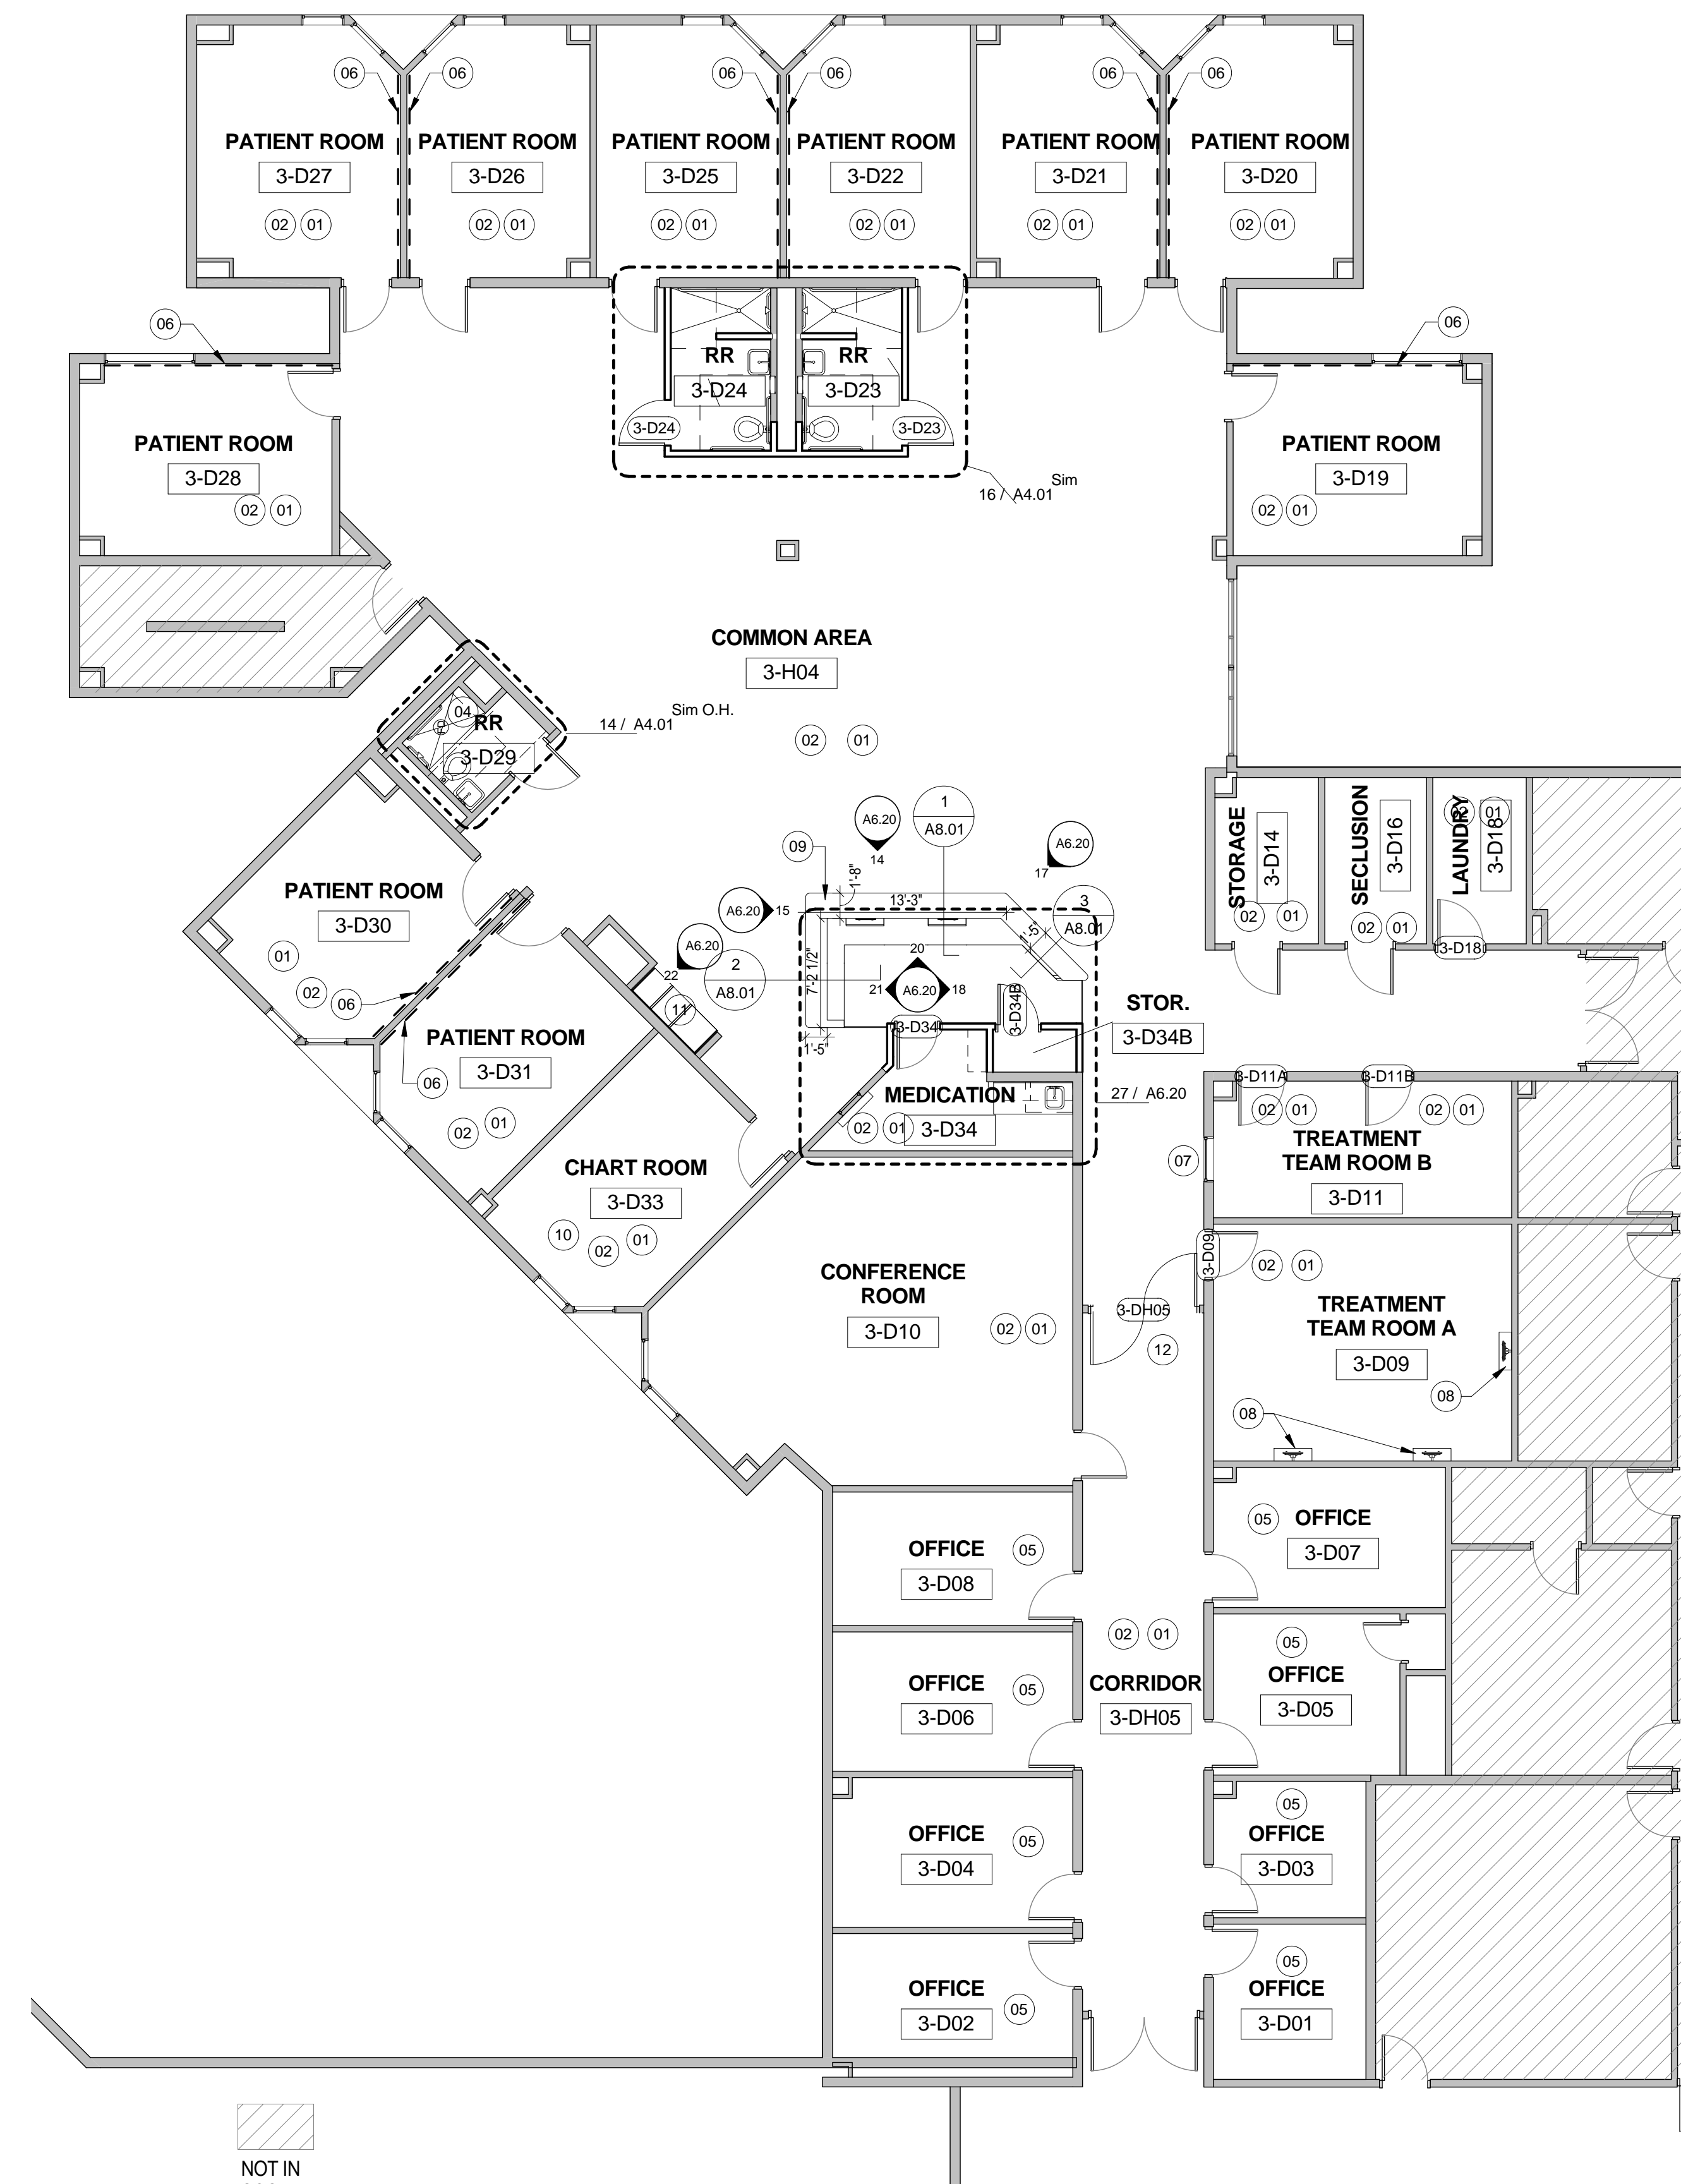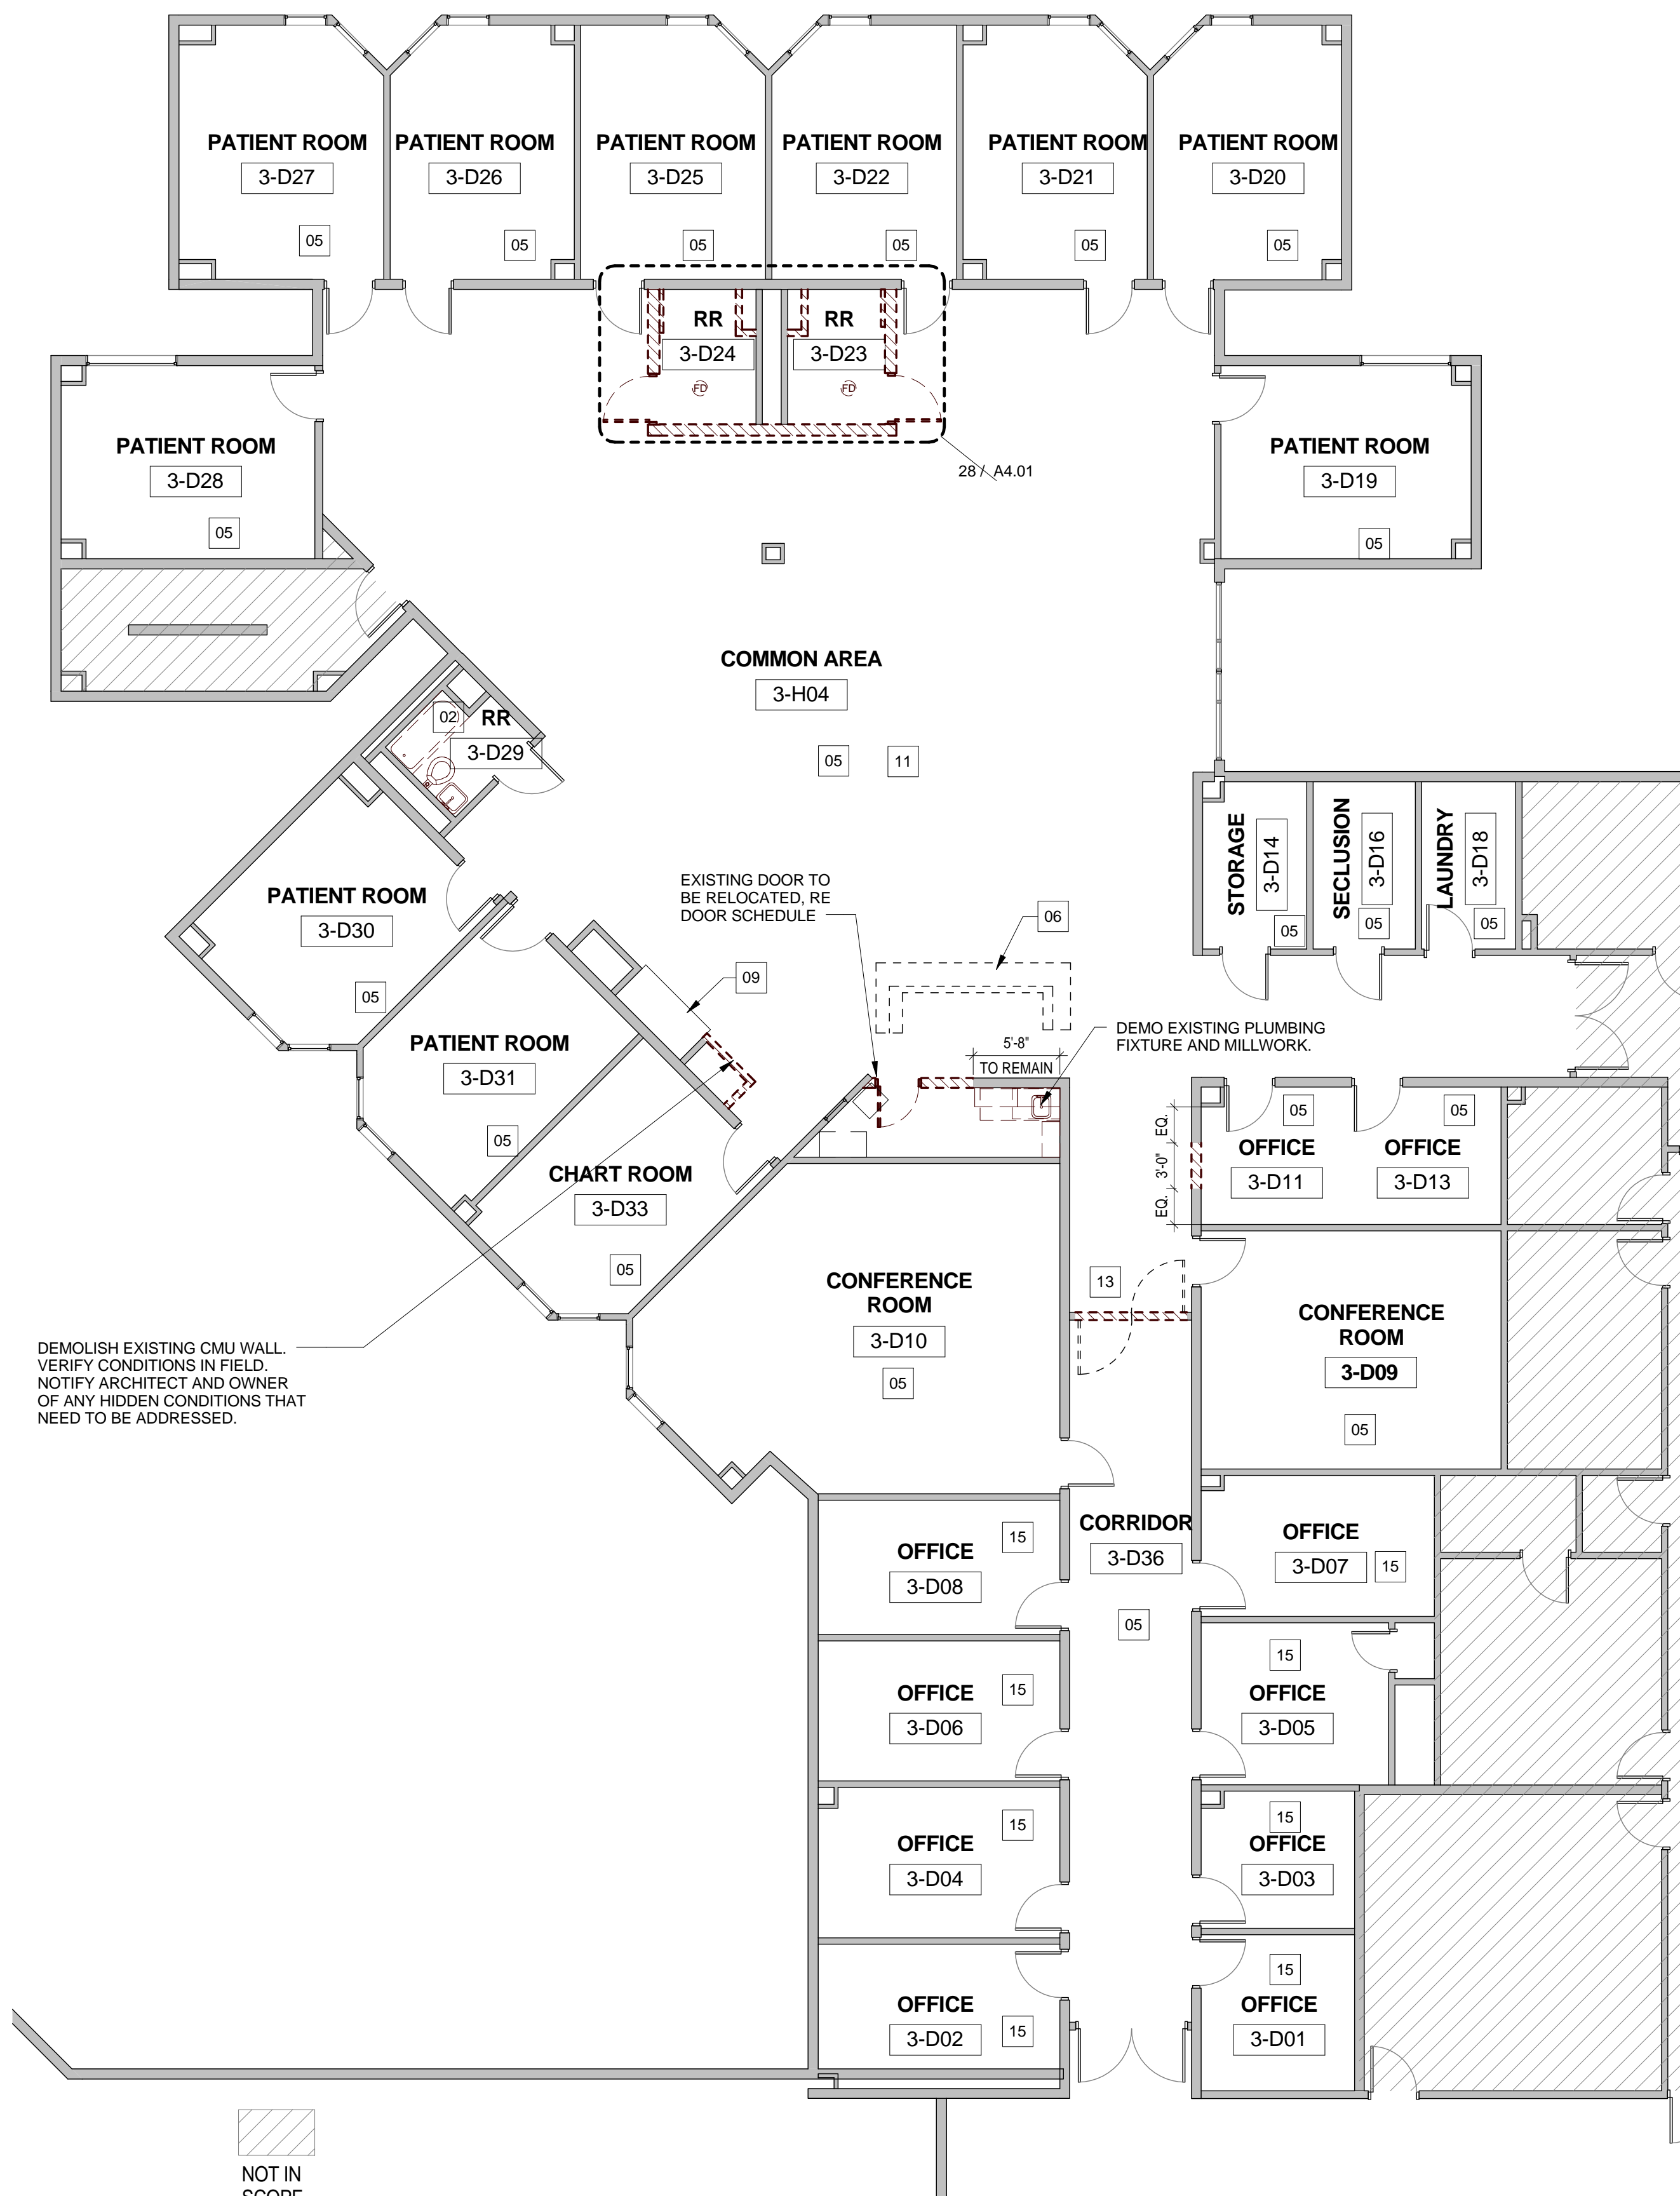

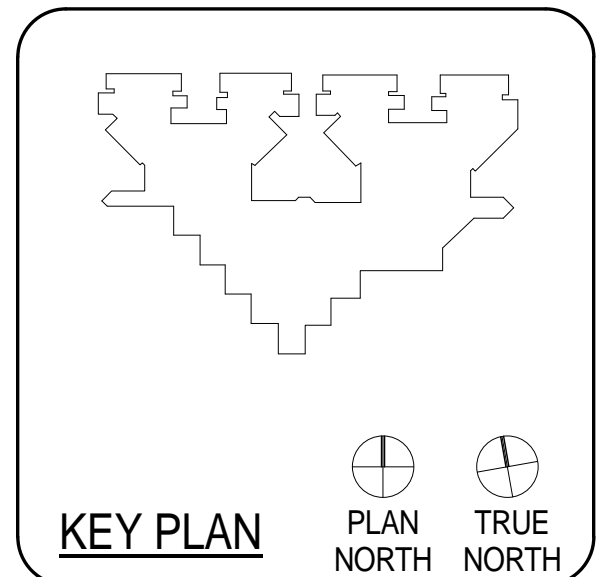

CLIENT	UT HEALTH
PROJECT NUMBER	16106
DATE:	OCTOBER 14, 2016
DRAWN BY:	VG/BG
CHECKED BY:	JM/CS


No.	Description	Date

ISSUE FOR BID
SCHEDULES - THIRD FLOOR UNIT 3E


A2.16E

MARK	ELEV.	PAIR/SING LE	DOOR			MATL.	ELEV.	FRAME			DETAILS			H.W.	FIRE RATING	Comments
			SIZE W x H		MATL.			SIZE W x H		SILL	JAMB	HEAD				
			W	H				W	H							
3-E49	B	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
3-E56	B	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
3-E71	A	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		2/A2.16E	3/A2.16E	SEE BELOW	N/A		
3-E72	A	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		2/A2.16E	3/A2.16E	SEE BELOW	N/A		
3-E73	A	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		2/A2.16E	3/A2.16E	SEE BELOW	N/A		
3-E74	A	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		2/A2.16E	3/A2.16E	SEE BELOW	N/A		
3-E83	B	S	3' - 4"	7' - 4"	SC WD	1	7' - 0"	3' - 0"	HM		EXISTING	EXISTING	EXISTING	N/A	ADD GLASS LITE TO EXISTING DOOR	
3-EH02	C	P	7' - 4"	7' - 4"	EXISTING	2	7' - 0"	7' - 0"	HM		2/A2.16E	3/A2.16E	EXISTING	N/A	SALVAGE EXISTING HARDWARE AND REINSTALL; RE-USE EXISTING GLASS LITE; EXISTING FRAME W/ NEW PAINT FINISH, RE: ALTERNATE NO. 3E-05	


- DOOR HARDWARE IS TO "MATCH EXISTING", BUT SHOULD CONSIST OF THE FOLLOWING COMPONENTS:
- A. (1) EA. SELECT HINGES SL57 FULL-SURFACE GEARED CONTINUOUS HINGES
 - B. (1) EA. "PUSH/PULL SET TO MATCH EXISTING; INSTALL PUSH PLATE ON INTERIOR (RESTROOM SIDE) OF DOOR, PULL ON EXTERIOR (COMMON AREA SIDE) OF DOOR, AND PROVIDE (1) LOCKSET FOR STAFF USE ON EXTERIOR (COMMON AREA SIDE) OF DOOR TO MATCH EXISTING
 - C. (1) EA. IVES WIS407CCV (WALL BUMPER)/FS436 (FLOOR DOME) DOOR STOP
 - D. (3) EA. IVES SR64 DOOR SILENCERS
 - E. NO CLOSERS

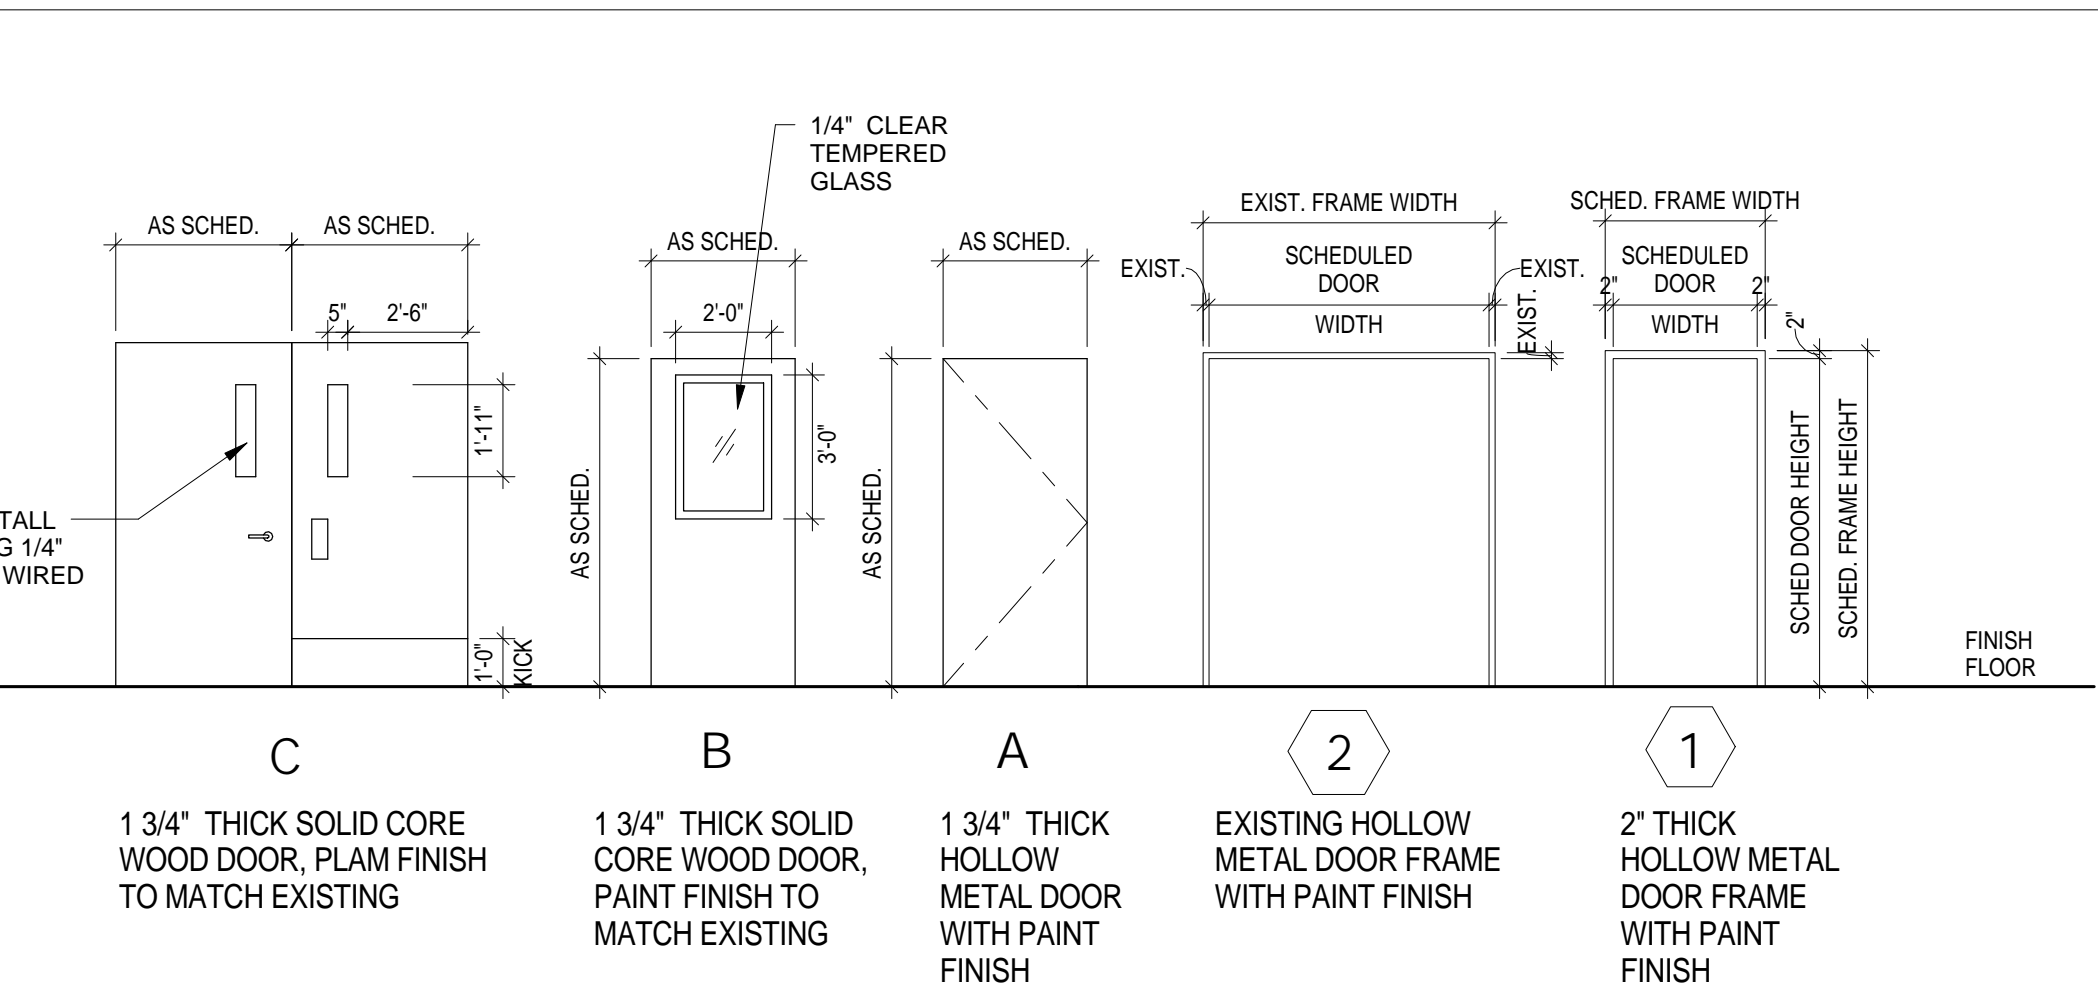

1 DOOR TYPE & FRAME 3E
1/4" = 1'-0"

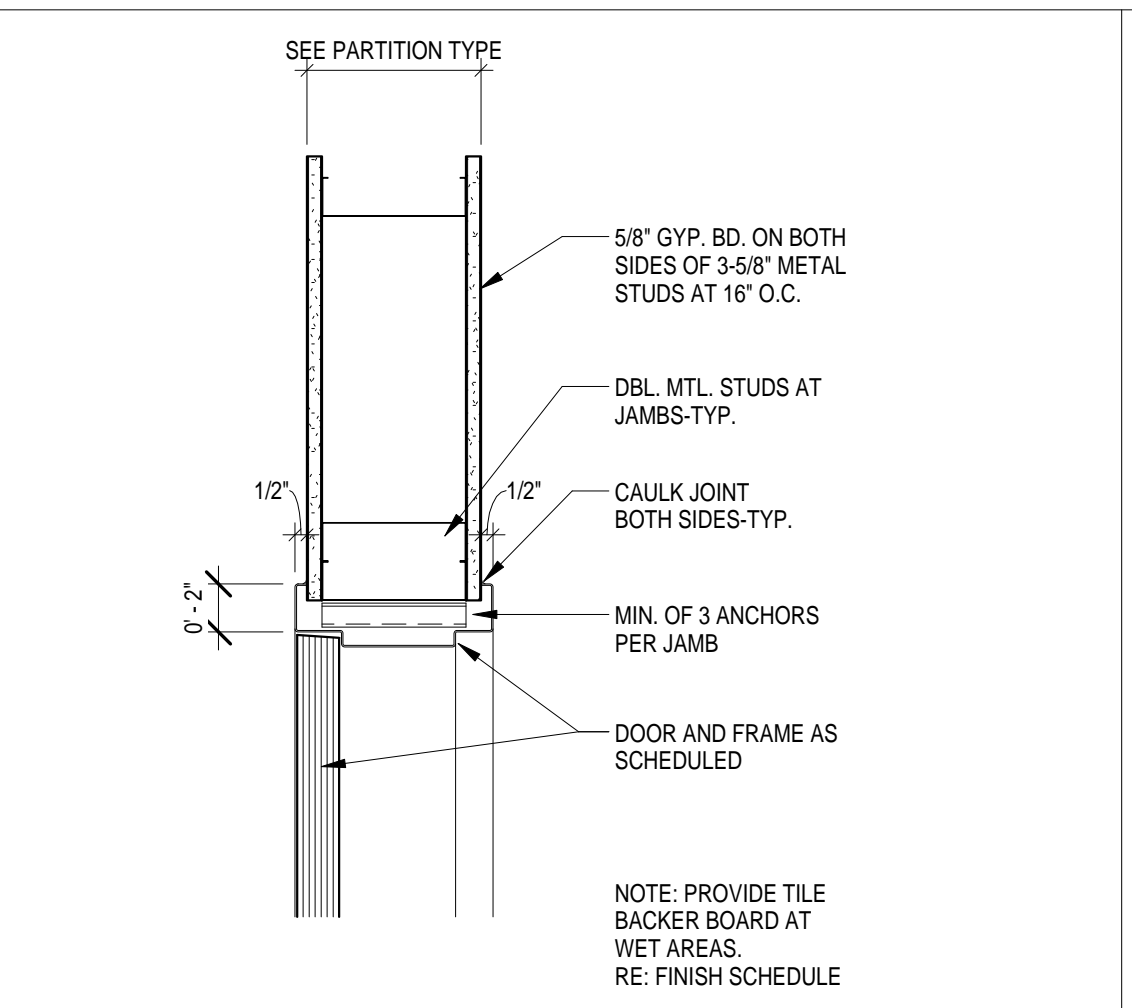

2 INT-STUD-DOOR-HM-JAMB-DTL
1 1/2" = 1'-0"

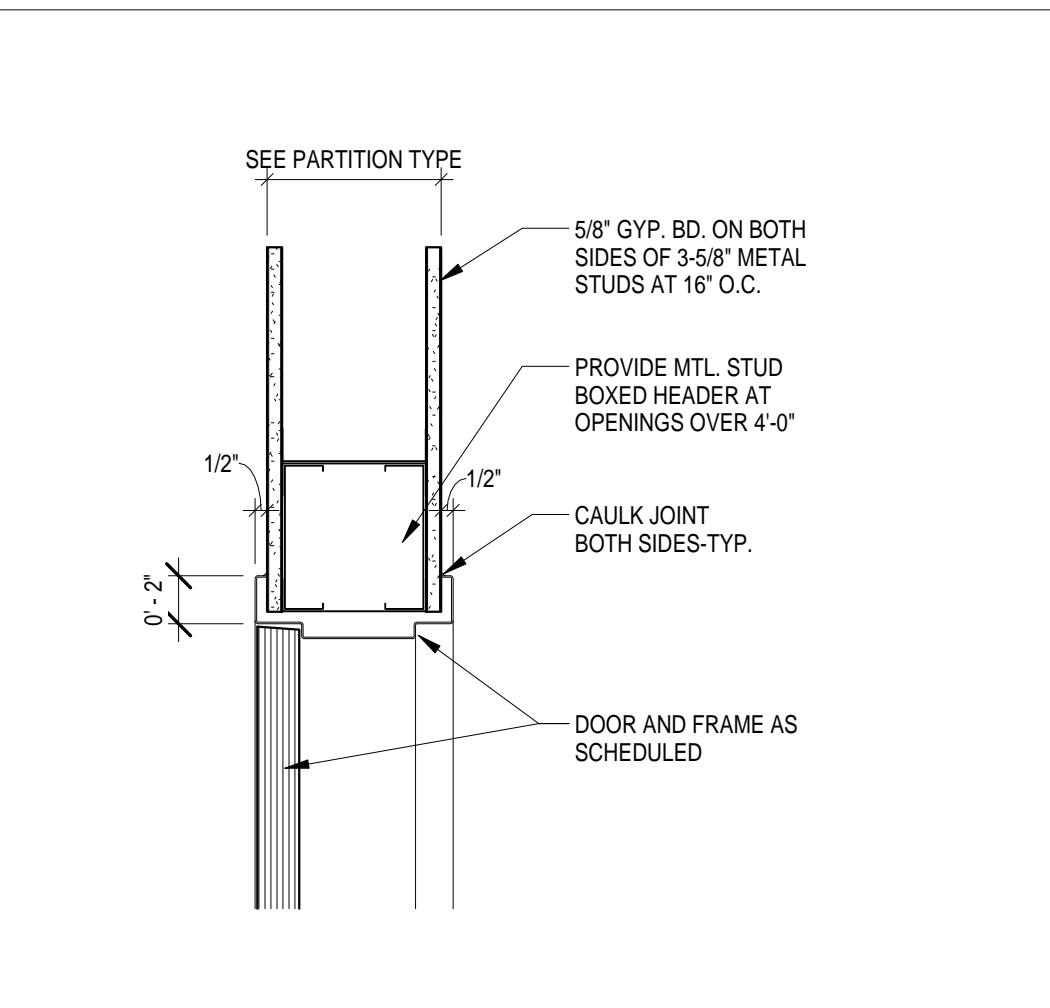

3 INT-STUD-DOOR-HM-HEAD-DTL
1 1/2" = 1'-0"

DEMOLITION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL: REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION. COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES
 - 03 REMOVE EXISTING DOOR AND FRAME, SALVAGE DOORS AND RETURN TO BUILDING STOCK. RE: RENOVATION PLAN
 - 04 TYPICAL: REMOVE ALL WALL-MOUNTED ACCESSORIES (IE. BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION. COORDINATE EXACT REQUIREMENTS IN FIELD
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS. COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 06 DEMOLISH EXISTING NURSE STATION
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED. COORDINATE EXACT REQUIREMENTS IN FIELD
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY
 - 09 REMOVE EXISTING NOURISHMENT STATION/DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT
 - 12 REMOVE EXISTING FLOORING ONLY
 - 13 ALTERNATE NO. 3E-05; RE: SPECS
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS. COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 16 ALTERNATE NO. 3E-01; RE: SPECS

RENOVATION - KEYED NOTES

- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES
 - 05 RE-PANT ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1. EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK - FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL
 - 07 ALTERNATE NO. 3E-01; RE: SPECS
 - 08 ALTERNATE NO. 3E-02; RE: SPECS
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICTED IN DETAILS WITHIN; MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA, NO FURR-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION
 - 10 ALTERNATE NO. 3E-03; RE: SPECS
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS
 - 12 ALTERNATE NO. 3E-05; RE: SPECS

GENERAL DEMOLITION NOTES:

1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS.
3. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
4. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
5. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (IE. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH U.L. APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RE-LOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION PLUMBING PLANS FOR EXTENT OF CONCRETE SLAB TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS OR PORTIONS OF WALLS TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW LINTELS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION. REMOVE EXISTING MECHANICAL EQUIPMENT. RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEPT SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL ELEMENTS. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS/CEILINGS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES.
26. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
27. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK. PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
28. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
29. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
30. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
31. REMOVE ALL CARPET/WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

GENERAL NOTES



1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYED AS REFERENCE SHEET A7.00 FOR PARTITION TYPES
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOORS FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCER AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT ARTICLE 9102, TEXAS CIVIL STATUTES (2012) FOR COMMON AREAS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713-965-9569 P
 713-961-4571 F
 TX Firm # F-1709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2825 S Willett Dr #300
 HOUSTON, TX 77042
 (713) 790-7563


**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

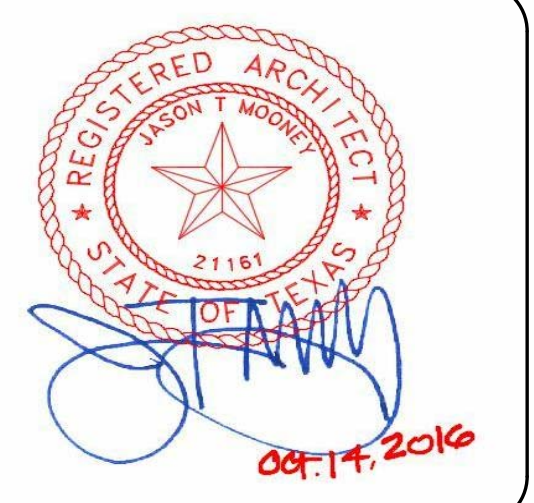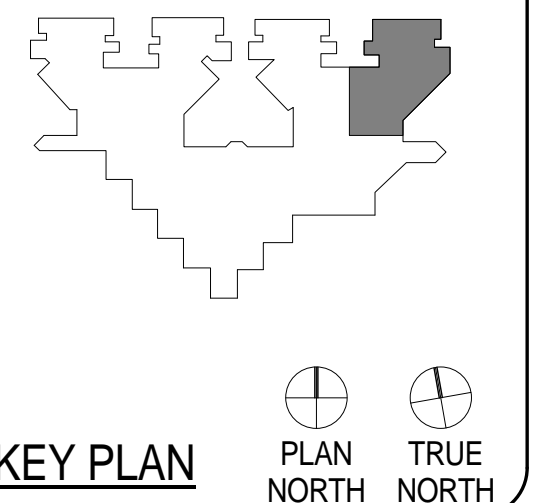

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VICTORIA GARCIA	
CHECKED BY:	Checker	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**THIRD FLOOR UNIT
 3E**



A2.17E

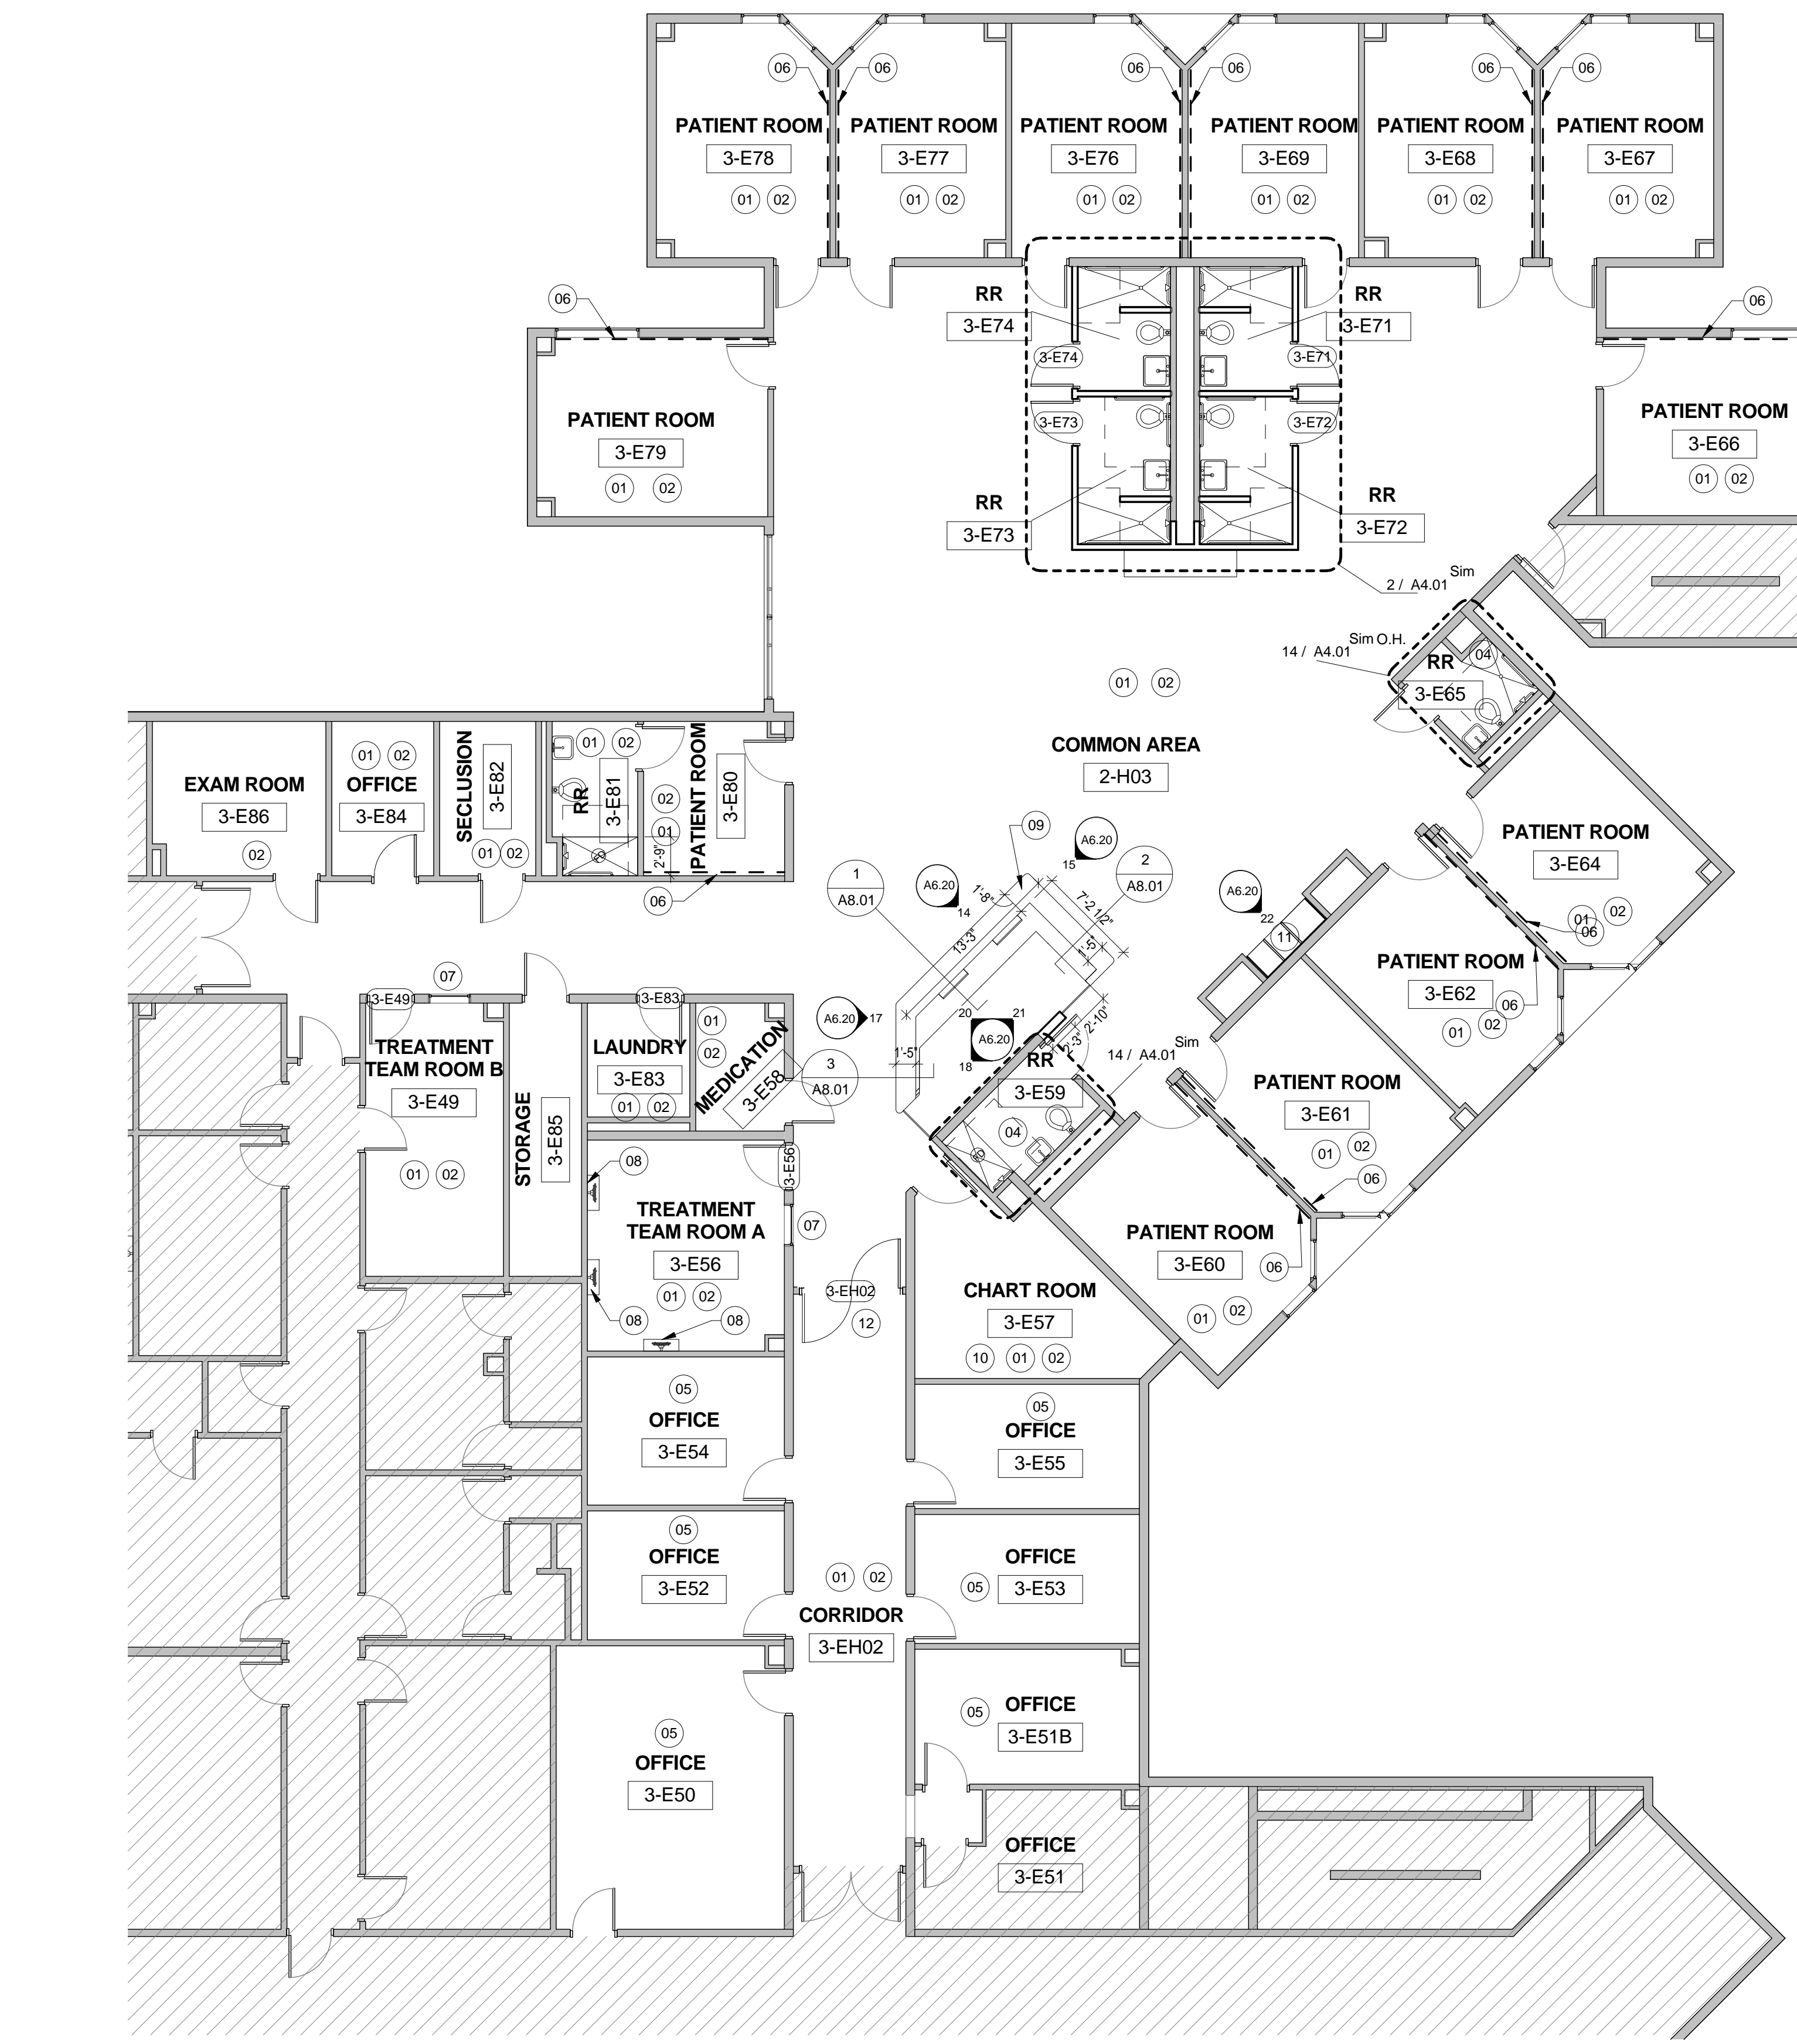

3 RENOVATION PLAN - UNIT 3E
 1/8" = 1'-0"

6 DEMOLITION FLOOR PLAN - UNIT 3E
 1/8" = 1'-0"

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

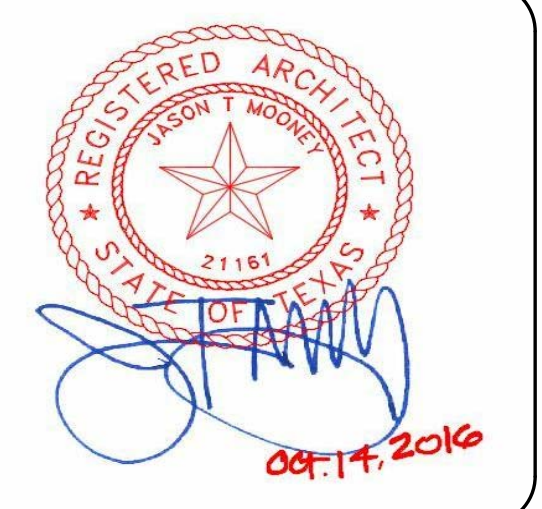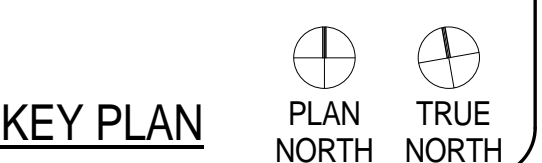


CLIENT	UT HEALTH
PROJECT NUMBER	16106
DATE:	OCTOBER 14, 2016
DRAWN BY:	Author
CHECKED BY:	Checker
REVISIONS	



No.	Description	Date

ISSUE FOR BID
**THIRD FLOOR UNIT
 3E - SIGNAGE PLAN**

A2.18E

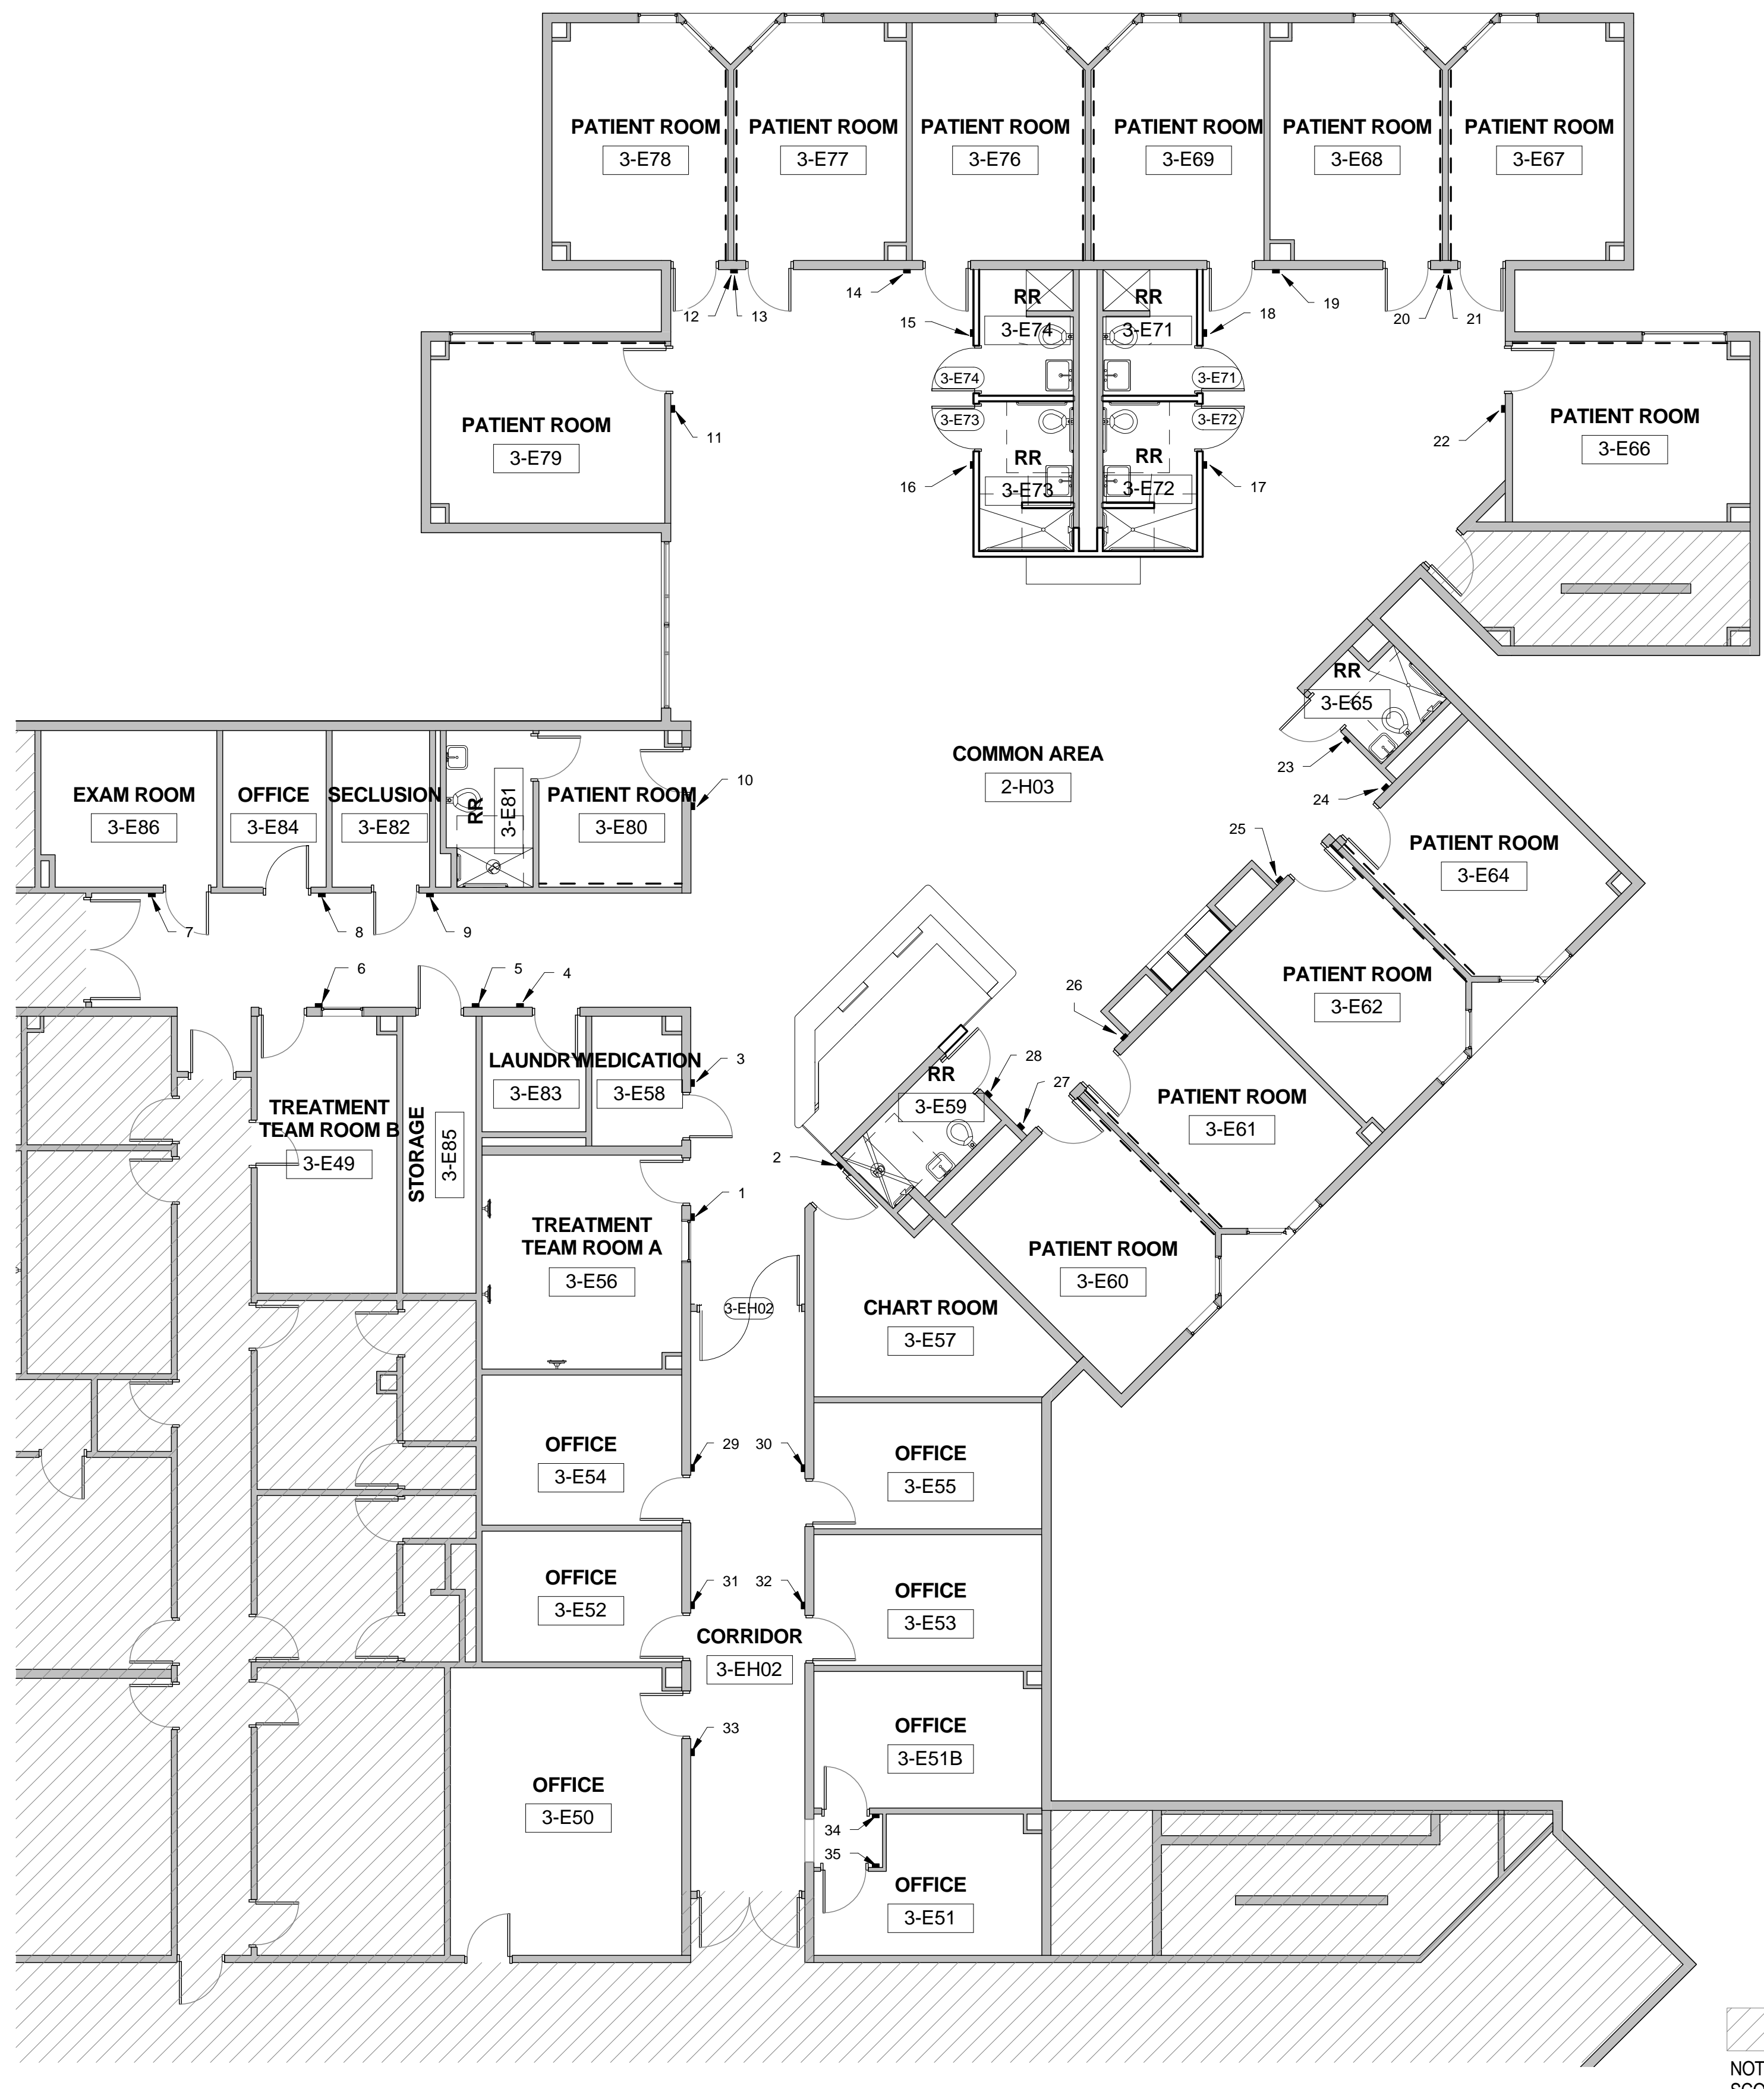

SIGN #	SIGN TYPE	LOCATION	DETAIL	MESSAGE	REVISION	DATE	BY	REVISION	DATE	BY
1	C	3-E56	RE: G4589-14 R1	LINE 1: 3-E56 LINE 2: (ADA BRAILLE: 3-E56) LINE 3: N/A LINE 4: N/A LINE 5: TREATMENT TEAM LINE 6: ROOM A LINE 7: (ADA BRAILLE: TREATMENT TEAM ROOM A)	20	D	3-E68	RE: G4589-14 R1	LINE 1: 3-E68 LINE 2: (ADA BRAILLE: 3-E68) LINE 3: N/A LINE 4: N/A LINE 5: 3-E67 LINE 6: (ADA BRAILLE: 3-E67) LINE 7: N/A LINE 8: N/A LINE 9: 3-E66 LINE 10: (ADA BRAILLE: 3-E66) LINE 11: N/A LINE 12: N/A LINE 13: N/A LINE 14: N/A LINE 15: 3-E65 LINE 16: (ADA BRAILLE: 3-E65) LINE 17: N/A LINE 18: N/A LINE 19: 3-E64 LINE 20: (ADA BRAILLE: 3-E64) LINE 21: N/A LINE 22: N/A LINE 23: N/A LINE 24: N/A LINE 25: 3-E63 LINE 26: (ADA BRAILLE: 3-E63) LINE 27: N/A LINE 28: N/A LINE 29: 3-E62 LINE 30: (ADA BRAILLE: 3-E62) LINE 31: N/A LINE 32: N/A LINE 33: N/A LINE 34: N/A LINE 35: 3-E61 LINE 36: (ADA BRAILLE: 3-E61) LINE 37: N/A LINE 38: N/A LINE 39: 3-E60 LINE 40: (ADA BRAILLE: 3-E60) LINE 41: N/A LINE 42: N/A LINE 43: 3-E59 LINE 44: (ADA BRAILLE: 3-E59) LINE 45: N/A LINE 46: N/A LINE 47: 3-E58 LINE 48: (ADA BRAILLE: 3-E58) LINE 49: N/A LINE 50: N/A LINE 51: 3-E57 LINE 52: (ADA BRAILLE: 3-E57) LINE 53: N/A LINE 54: N/A LINE 55: 3-E56 LINE 56: (ADA BRAILLE: 3-E56) LINE 57: N/A LINE 58: N/A LINE 59: 3-E55 LINE 60: (ADA BRAILLE: 3-E55) LINE 61: N/A LINE 62: N/A LINE 63: 3-E54 LINE 64: (ADA BRAILLE: 3-E54) LINE 65: N/A LINE 66: N/A LINE 67: 3-E53 LINE 68: (ADA BRAILLE: 3-E53) LINE 69: N/A LINE 70: N/A LINE 71: 3-E52 LINE 72: (ADA BRAILLE: 3-E52) LINE 73: N/A LINE 74: N/A LINE 75: 3-E51 LINE 76: (ADA BRAILLE: 3-E51) LINE 77: N/A LINE 78: N/A LINE 79: 3-E50 LINE 80: (ADA BRAILLE: 3-E50) LINE 81: N/A LINE 82: N/A LINE 83: 3-E49 LINE 84: (ADA BRAILLE: 3-E49) LINE 85: N/A LINE 86: N/A LINE 87: 3-E48 LINE 88: (ADA BRAILLE: 3-E48) LINE 89: N/A LINE 90: N/A LINE 91: 3-E47 LINE 92: (ADA BRAILLE: 3-E47) LINE 93: N/A LINE 94: N/A LINE 95: 3-E46 LINE 96: (ADA BRAILLE: 3-E46) LINE 97: N/A LINE 98: N/A LINE 99: 3-E45 LINE 100: (ADA BRAILLE: 3-E45) LINE 101: N/A LINE 102: N/A LINE 103: 3-E44 LINE 104: (ADA BRAILLE: 3-E44) LINE 105: N/A LINE 106: N/A LINE 107: 3-E43 LINE 108: (ADA BRAILLE: 3-E43) LINE 109: N/A LINE 110: N/A LINE 111: 3-E42 LINE 112: (ADA BRAILLE: 3-E42) LINE 113: N/A LINE 114: N/A LINE 115: 3-E41 LINE 116: (ADA BRAILLE: 3-E41) LINE 117: N/A LINE 118: N/A LINE 119: 3-E40 LINE 120: (ADA BRAILLE: 3-E40) LINE 121: N/A LINE 122: N/A LINE 123: 3-E39 LINE 124: (ADA BRAILLE: 3-E39) LINE 125: N/A LINE 126: N/A LINE 127: 3-E38 LINE 128: (ADA BRAILLE: 3-E38) LINE 129: N/A LINE 130: N/A LINE 131: 3-E37 LINE 132: (ADA BRAILLE: 3-E37) LINE 133: N/A LINE 134: N/A LINE 135: 3-E36 LINE 136: (ADA BRAILLE: 3-E36) LINE 137: N/A LINE 138: N/A LINE 139: 3-E35 LINE 140: (ADA BRAILLE: 3-E35) LINE 141: N/A LINE 142: N/A LINE 143: 3-E34 LINE 144: (ADA BRAILLE: 3-E34) LINE 145: N/A LINE 146: N/A LINE 147: 3-E33 LINE 148: (ADA BRAILLE: 3-E33) LINE 149: N/A LINE 150: N/A LINE 151: 3-E32 LINE 152: (ADA BRAILLE: 3-E32) LINE 153: N/A LINE 154: N/A LINE 155: 3-E31 LINE 156: (ADA BRAILLE: 3-E31) LINE 157: N/A LINE 158: N/A LINE 159: 3-E30 LINE 160: (ADA BRAILLE: 3-E30) LINE 161: N/A LINE 162: N/A LINE 163: 3-E29 LINE 164: (ADA BRAILLE: 3-E29) LINE 165: N/A LINE 166: N/A LINE 167: 3-E28 LINE 168: (ADA BRAILLE: 3-E28) LINE 169: N/A LINE 170: N/A LINE 171: 3-E27 LINE 172: (ADA BRAILLE: 3-E27) LINE 173: N/A LINE 174: N/A LINE 175: 3-E26 LINE 176: (ADA BRAILLE: 3-E26) LINE 177: N/A LINE 178: N/A LINE 179: 3-E25 LINE 180: (ADA BRAILLE: 3-E25) LINE 181: N/A LINE 182: N/A LINE 183: 3-E24 LINE 184: (ADA BRAILLE: 3-E24) LINE 185: N/A LINE 186: N/A LINE 187: 3-E23 LINE 188: (ADA BRAILLE: 3-E23) LINE 189: N/A LINE 190: N/A LINE 191: 3-E22 LINE 192: (ADA BRAILLE: 3-E22) LINE 193: N/A LINE 194: N/A LINE 195: 3-E21 LINE 196: (ADA BRAILLE: 3-E21) LINE 197: N/A LINE 198: N/A LINE 199: 3-E20 LINE 200: (ADA BRAILLE: 3-E20) LINE 201: N/A LINE 202: N/A LINE 203: 3-E19 LINE 204: (ADA BRAILLE: 3-E19) LINE 205: N/A LINE 206: N/A LINE 207: 3-E18 LINE 208: (ADA BRAILLE: 3-E18) LINE 209: N/A LINE 210: N/A LINE 211: 3-E17 LINE 212: (ADA BRAILLE: 3-E17) LINE 213: N/A LINE 214: N/A LINE 215: 3-E16 LINE 216: (ADA BRAILLE: 3-E16) LINE 217: N/A LINE 218: N/A LINE 219: 3-E15 LINE 220: (ADA BRAILLE: 3-E15) LINE 221: N/A LINE 222: N/A LINE 223: 3-E14 LINE 224: (ADA BRAILLE: 3-E14) LINE 225: N/A LINE 226: N/A LINE 227: 3-E13 LINE 228: (ADA BRAILLE: 3-E13) LINE 229: N/A LINE 230: N/A LINE 231: 3-E12 LINE 232: (ADA BRAILLE: 3-E12) LINE 233: N/A LINE 234: N/A LINE 235: 3-E11 LINE 236: (ADA BRAILLE: 3-E11) LINE 237: N/A LINE 238: N/A LINE 239: 3-E10 LINE 240: (ADA BRAILLE: 3-E10) LINE 241: N/A LINE 242: N/A LINE 243: 3-E09 LINE 244: (ADA BRAILLE: 3-E09) LINE 245: N/A LINE 246: N/A LINE 247: 3-E08 LINE 248: (ADA BRAILLE: 3-E08) LINE 249: N/A LINE 250: N/A LINE 251: 3-E07 LINE 252: (ADA BRAILLE: 3-E07) LINE 253: N/A LINE 254: N/A LINE 255: 3-E06 LINE 256: (ADA BRAILLE: 3-E06) LINE 257: N/A LINE 258: N/A LINE 259: 3-E05 LINE 260: (ADA BRAILLE: 3-E05) LINE 261: N/A LINE 262: N/A LINE 263: 3-E04 LINE 264: (ADA BRAILLE: 3-E04) LINE 265: N/A LINE 266: N/A LINE 267: 3-E03 LINE 268: (ADA BRAILLE: 3-E03) LINE 269: N/A LINE 270: N/A LINE 271: 3-E02 LINE 272: (ADA BRAILLE: 3-E02) LINE 273: N/A LINE 274: N/A LINE 275: 3-E01 LINE 276: (ADA BRAILLE: 3-E01) LINE 277: N/A LINE 278: N/A LINE 279: 3-E00 LINE 280: (ADA BRAILLE: 3-E00) LINE 281: N/A LINE 282: N/A LINE 283: 3-E99 LINE 284: (ADA BRAILLE: 3-E99) LINE 285: N/A LINE 286: N/A LINE 287: 3-E98 LINE 288: (ADA BRAILLE: 3-E98) LINE 289: N/A LINE 290: N/A LINE 291: 3-E97 LINE 292: (ADA BRAILLE: 3-E97) LINE 293: N/A LINE 294: N/A LINE 295: 3-E96 LINE 296: (ADA BRAILLE: 3-E96) LINE 297: N/A LINE 298: N/A LINE 299: 3-E95 LINE 300: (ADA BRAILLE: 3-E95) LINE 301: N/A LINE 302: N/A LINE 303: 3-E94 LINE 304: (ADA BRAILLE: 3-E94) LINE 305: N/A LINE 306: N/A LINE 307: 3-E93 LINE 308: (ADA BRAILLE: 3-E93) LINE 309: N/A LINE 310: N/A LINE 311: 3-E92 LINE 312: (ADA BRAILLE: 3-E92) LINE 313: N/A LINE 314: N/A LINE 315: 3-E91 LINE 316: (ADA BRAILLE: 3-E91) LINE 317: N/A LINE 318: N/A LINE 319: 3-E90 LINE 320: (ADA BRAILLE: 3-E90) LINE 321: N/A LINE 322: N/A LINE 323: 3-E89 LINE 324: (ADA BRAILLE: 3-E89) LINE 325: N/A LINE 326: N/A LINE 327: 3-E88 LINE 328: (ADA BRAILLE: 3-E88) LINE 329: N/A LINE 330: N/A LINE 331: 3-E87 LINE 332: (ADA BRAILLE: 3-E87) LINE 333: N/A LINE 334: N/A LINE 335: 3-E86 LINE 336: (ADA BRAILLE: 3-E86) LINE 337: N/A LINE 338: N/A LINE 339: 3-E85 LINE 340: (ADA BRAILLE: 3-E85) LINE 341: N/A LINE 342: N/A LINE 343: 3-E84 LINE 344: (ADA BRAILLE: 3-E84) LINE 345: N/A LINE 346: N/A LINE 347: 3-E83 LINE 348: (ADA BRAILLE: 3-E83) LINE 349: N/A LINE 350: N/A LINE 351: 3-E82 LINE 352: (ADA BRAILLE: 3-E82) LINE 353: N/A LINE 354: N/A LINE 355: 3-E81 LINE 356: (ADA BRAILLE: 3-E81) LINE 357: N/A LINE 358: N/A LINE 359: 3-E80 LINE 360: (ADA BRAILLE: 3-E80) LINE 361: N/A LINE 362: N/A LINE 363: 3-E79 LINE 364: (ADA BRAILLE: 3-E79) LINE 365: N/A LINE 366: N/A LINE 367: 3-E78 LINE 368: (ADA BRAILLE: 3-E78) LINE 369: N/A LINE 370: N/A LINE 371: 3-E77 LINE 372: (ADA BRAILLE: 3-E77) LINE 373: N/A LINE 374: N/A LINE 375: 3-E76 LINE 376: (ADA BRAILLE: 3-E76) LINE 377: N/A LINE 378: N/A LINE 379: 3-E75 LINE 380: (ADA BRAILLE: 3-E75) LINE 381: N/A LINE 382: N/A LINE 383: 3-E74 LINE 384: (ADA BRAILLE: 3-E74) LINE 385: N/A LINE 386: N/A LINE 387: 3-E73 LINE 388: (ADA BRAILLE: 3-E73) LINE 389: N/A LINE 390: N/A LINE 391: 3-E72 LINE 392: (ADA BRAILLE: 3-E72) LINE 393: N/A LINE 394: N/A LINE 395: 3-E71 LINE 396: (ADA BRAILLE: 3-E71) LINE 397: N/A LINE 398: N/A LINE 399: 3-E70 LINE 400: (ADA BRAILLE: 3-E70) LINE 401: N/A LINE 402: N/A LINE 403: 3-E69 LINE 404: (ADA BRAILLE: 3-E69) LINE 405: N/A LINE 406: N/A LINE 407: 3-E68 LINE 408: (ADA BRAILLE: 3-E68) LINE 409: N/A LINE 410: N/A LINE 411: 3-E67 LINE 412: (ADA BRAILLE: 3-E67) LINE 413: N/A LINE 414: N/A LINE 415: 3-E66 LINE 416: (ADA BRAILLE: 3-E66) LINE 417: N/A LINE 418: N/A LINE 419: 3-E65 LINE 420: (ADA BRAILLE: 3-E65) LINE 421: N/A LINE 422: N/A LINE 423: 3-E64 LINE 424: (ADA BRAILLE: 3-E64) LINE 425: N/A LINE 426: N/A LINE 427: 3-E63 LINE 428: (ADA BRAILLE: 3-E63) LINE 429: N/A LINE 430: N/A LINE 431: 3-E62 LINE 432: (ADA BRAILLE: 3-E62) LINE 433: N/A LINE 434: N/A LINE 435: 3-E61 LINE 436: (ADA BRAILLE: 3-E61) LINE 437: N/A LINE 438: N/A LINE 439: 3-E60 LINE 440: (ADA BRAILLE: 3-E60) LINE 441: N/A LINE 442: N/A LINE 443: 3-E59 LINE 444: (ADA BRAILLE: 3-E59) LINE 445: N/A LINE 446: N/A LINE 447: 3-E58 LINE 448: (ADA BRAILLE: 3-E58) LINE 449: N/A LINE 450: N/A LINE 451: 3-E57 LINE 452: (ADA BRAILLE: 3-E57) LINE 453: N/A LINE 454: N/A LINE 455: 3-E56 LINE 456: (ADA BRAILLE: 3-E56) LINE 457: N/A LINE 458: N/A LINE 459: 3-E55 LINE 460: (ADA BRAILLE: 3-E55) LINE 461: N/A LINE 462: N/A LINE 463: 3-E54 LINE 464: (ADA BRAILLE: 3-E54) LINE 465: N/A LINE 466: N/A LINE 467: 3-E53 LINE 468: (ADA BRAILLE: 3-E53) LINE 469: N/A LINE 470: N/A LINE 471: 3-E52 LINE 472: (ADA BRAILLE: 3-E52) LINE 473: N/A LINE 474: N/A LINE 475: 3-E51 LINE 476: (ADA BRAILLE: 3-E51) LINE 477: N/A LINE 478: N/A LINE 479: 3-E50 LINE 480: (ADA BRAILLE: 3-E50) LINE 481: N/A LINE 482: N/A LINE 483: 3-E49 LINE 484: (ADA BRAILLE: 3-E49) LINE 485: N/A LINE 486: N/A LINE 487: 3-E48 LINE 488: (ADA BRAILLE: 3-E48) LINE 489: N/A LINE 490: N/A LINE 491: 3-E47 LINE 492: (ADA BRAILLE: 3-E47) LINE 493: N/A LINE 494: N/A LINE 495: 3-E46 LINE 496: (ADA BRAILLE: 3-E46) LINE 497: N/A LINE 498: N/A LINE 499: 3-E45 LINE 500: (ADA BRAILLE: 3-E45) LINE 501: N/A LINE 502: N/A LINE 503: 3-E44 LINE 504: (ADA BRAILLE: 3-E44) LINE 505: N/A LINE 506: N/A LINE 507: 3-E43 LINE 508: (ADA BRAILLE: 3-E43) LINE 509: N/A LINE 510: N/A LINE 511: 3-E42 LINE 512: (ADA BRAILLE: 3-E42) LINE 513: N/A LINE 514: N/A LINE 515: 3-E41 LINE 516: (ADA BRAILLE: 3-E41) LINE 517: N/A LINE 518: N/A LINE 519: 3-E40 LINE 520: (ADA BRAILLE: 3-E40) LINE 521: N/A LINE 522: N/A LINE 523: 3-E39 LINE 524: (ADA BRAILLE: 3-E39) LINE 525: N/A LINE 526: N/A LINE 527: 3-E38 LINE 528: (ADA BRAILLE: 3-E38) LINE 529: N/A LINE 530: N/A LINE 531: 3-E37 LINE 532: (ADA BRAILLE: 3-E37) LINE 533: N/A LINE 534: N/A LINE 535: 3-E36 LINE 536: (ADA BRAILLE: 3-E36) LINE 537: N/A LINE 538: N/A LINE 539: 3-E35 LINE 540: (ADA BRAILLE: 3-E35) LINE 541: N/A LINE 542: N/A LINE 543: 3-E34 LINE 544: (ADA BRAILLE: 3-E34) LINE 545: N/A LINE 546: N/A LINE 547: 3-E33 LINE 548: (ADA BRAILLE: 3-E33) LINE 549: N/A LINE 550: N/A LINE 551: 3-E32 LINE 552: (ADA BRAILLE: 3-E32) LINE 553: N/A LINE 554: N/A LINE 555: 3-E31 LINE 556: (ADA BRAILLE: 3-E31) LINE 557: N/A LINE 558: N/A LINE 559: 3-E30 LINE 560: (ADA BRAILLE: 3-E30) LINE 561: N/A LINE 562: N/A LINE 563: 3-E29 LINE 564: (ADA BRAILLE: 3-E29) LINE 565: N/A LINE 566: N/A LINE 567: 3-E28 LINE 568: (ADA BRAILLE: 3-E28) LINE 569: N/A LINE 570: N/A LINE 571: 3-E27 LINE 572: (ADA BRAILLE: 3-E27) LINE 573: N/A LINE 574: N/A LINE 575: 3-E26 LINE 576: (ADA BRAILLE: 3-E26) LINE 577: N/A LINE 578: N/A LINE 579: 3-E25 LINE 580: (ADA BRAILLE: 3-E25) LINE 581: N/A LINE 582: N/A LINE 583: 3-E24 LINE 584: (ADA BRAILLE: 3-E24) LINE 585: N/A LINE 586: N/A LINE 587: 3-E23 LINE 588: (ADA BRAILLE: 3-E23) LINE 589: N/A LINE 590: N/A LINE 591: 3-E22 LINE 592: (ADA BRAILLE: 3-E22) LINE 593: N/A LINE 594: N/A LINE 595: 3-E21 LINE 596: (ADA BRAILLE: 3-E21) LINE 597: N/A LINE 598: N/A LINE 599: 3-E20 LINE 600: (ADA BRAILLE: 3-E20) LINE 601: N/A LINE 602: N/A LINE 603: 3-E19 LINE 604: (ADA BRAILLE: 3-E19) LINE 605: N/A LINE 606: N/A LINE 607: 3-E18 LINE 608: (ADA BRAILLE: 3-E18) LINE 609: N/A LINE 610: N/A LINE 611: 3-E17 LINE 612: (ADA BRAILLE: 3-E17) LINE 613: N/A LINE 614: N/A LINE 615: 3-E16 LINE 616: (ADA BRAILLE: 3-E16) LINE 617: N/A LINE 618: N/A LINE 619: 3-E15 LINE 620: (ADA BRAILLE: 3-E15) LINE 621: N/A LINE 622: N/A LINE 623: 3-E14 LINE 624: (ADA BRAILLE: 3-E14) LINE 625: N/A LINE 626: N/A LINE 627: 3-E13 LINE 628: (ADA BRAILLE: 3-E13) LINE 629: N/A LINE 630: N/A LINE 631: 3-E12 LINE 632: (ADA BRAILLE: 3-E12) LINE 633: N/A LINE 634: N/A LINE 635: 3-E11 LINE 636: (ADA BRAILLE: 3-E11) LINE 637: N/A LINE 638: N/A LINE 639: 3-E10 LINE 640: (ADA BRAILLE: 3-E10) LINE 641: N/A LINE 642: N/A LINE 643: 3-E09 LINE 644: (ADA BRAILLE: 3-E09) LINE 645: N/A LINE 646: N/A LINE 647: 3-E08 LINE 648: (ADA BRAILLE: 3-E08) LINE 649: N/A LINE 650: N/A LINE 651: 3-E07 LINE 652: (ADA BRAILLE: 3-E07) LINE 653: N/A LINE 654: N/A LINE 655: 3-E06 LINE 656: (ADA BRAILLE: 3-E06) LINE 657: N/A LINE 658: N/A LINE 659: 3-E05 LINE 660: (ADA BRAILLE: 3-E05) LINE 661: N/A LINE 662: N/A LINE 663: 3-E04 LINE 664: (ADA BRAILLE: 3-E04) LINE 665: N/A LINE 666: N/A LINE 667: 3-E03 LINE 668: (ADA BRAILLE: 3-E03) LINE 669: N/A LINE 670: N/A LINE 671: 3-E02 LINE 672: (ADA BRAILLE: 3-E02) LINE 673: N/A LINE 674: N/A LINE 675: 3-E01 LINE 676: (ADA BRAILLE: 3-E01) LINE 677: N/A LINE 678: N/A LINE 679: 3-E00 LINE 680: (ADA BRAILLE: 3-E00) LINE 681: N/A LINE 682: N/A LINE 683: 3-E99 LINE 684: (ADA BRAILLE: 3-E99) LINE 685: N/A LINE 686: N/A LINE 687: 3-E98 LINE 688: (ADA BRAILLE: 3-E98) LINE 689: N/A LINE 690: N/A LINE 691: 3-E97 LINE 692: (ADA BRAILLE: 3-E97) LINE 693: N/A LINE 694: N/A LINE 695: 3-E96 LINE 696: (ADA BRAILLE: 3-E96) LINE 697: N/A LINE 698: N/A LINE 699: 3-E95 LINE 700: (ADA BRAILLE: 3-E95) LINE 701: N/A LINE 702: N/A LINE 703: 3-E94 LINE 704: (ADA BRAILLE: 3-E94) LINE 705: N/A LINE 706: N/A LINE 707: 3-E93 LINE 708: (ADA BRAILLE: 3-E93) LINE 709: N/A LINE 710: N/A LINE 711: 3-E92 LINE 712: (ADA BRAILLE: 3-E92) LINE 713: N/A LINE 714: N/A LINE 715: 3-E91 LINE 716: (ADA BRAILLE: 3-E91) LINE 717: N/A LINE 718: N/A LINE 719: 3-E90 LINE 720: (ADA BRAILLE: 3-E90) LINE 721: N/A LINE 722: N/A LINE 723: 3-E89 LINE 724: (ADA BRAILLE: 3-E89) LINE 725: N/A LINE 726: N/A LINE 727: 3-E88 LINE 728: (ADA BRAILLE: 3-E88) LINE 729: N/A LINE 730: N/A LINE 731: 3-E87 LINE 732: (ADA BRAILLE: 3-E87) LINE 733: N/A LINE 734: N/A LINE 735: 3-E86 LINE 736: (ADA BRAILLE: 3-E86) LINE 737: N/A LINE 738: N/A LINE 739: 3-E85 LINE 740: (ADA BRAILLE: 3-E85) LINE 741: N/A LINE 742: N/A LINE 743: 3-E84 LINE 744: (ADA BRAILLE: 3-E84) LINE 745: N/A LINE 746: N/A LINE 747: 3-E83 LINE 748: (ADA BRAILLE: 3-E83) LINE 749: N/A LINE 750: N/A LINE 751: 3-E82 LINE 752: (ADA BRAILLE: 3-E82) LINE 753: N/A LINE 754: N/A LINE 755: 3-E81 LINE 756: (ADA BRAILLE: 3-E81) LINE 757: N/A LINE 758: N/A LINE 759: 3-E80 LINE 760: (ADA BRAILLE: 3-E80) LINE 761: N/A LINE 762: N/A LINE 763: 3-E79 LINE 764: (ADA BRAILLE: 3-E79) LINE 765: N/A LINE 766: N/A LINE 767: 3-E78 LINE 768: (ADA BRAILLE: 3-E78) LINE 769: N/A LINE 770: N/A LINE 771: 3-E77 LINE 772: (ADA BRAILLE: 3-E77) LINE 773: N/A LINE 774: N/A LINE 775: 3-E76 LINE 776: (ADA BRAILLE: 3-E76) LINE 777: N/A LINE 778: N/A LINE 779: 3-E75 LINE 780: (ADA BRAILLE: 3-E75) LINE 781: N/A LINE 782: N/A LINE 783: 3-E74 LINE 784: (ADA BRAILLE: 3-E74) LINE 785: N/A LINE 786: N/A LINE 787: 3-E73 LINE 788: (ADA BRAILLE: 3-E73) LINE 789: N/A LINE 790: N/A LINE 791: 3-E72 LINE 792: (ADA BRAILLE: 3-E72) LINE 793: N/A LINE 794: N/A LINE 795: 3-E71 LINE 796: (ADA BRAILLE: 3-E71) LINE 797: N/A LINE 798: N/A LINE 799: 3-E70 LINE 800: (ADA BRAILLE: 3-E70) LINE 801: N/A LINE 802: N/A LINE 803: 3-E69 LINE 804: (ADA BRAILLE: 3-E69) LINE 805: N/A LINE 806: N/A LINE 807: 3-E68 LINE 808: (ADA BRAILLE: 3-E68) LINE 809: N/A LINE 810: N/A LINE 811: 3-E67 LINE 812: (ADA BRAILLE: 3-E67) LINE 813: N/A LINE 814: N/A LINE 815: 3-E66 LINE 816: (ADA BRAILLE: 3-E66) LINE 817: N/A LINE 818: N/A LINE 819: 3-E65 LINE 820: (ADA BRAILLE: 3-E65) LINE 821: N/A LINE 822: N/A LINE 823: 3-E64 LINE 824: (ADA BRAILLE: 3-E64) LINE 825: N/A LINE 826: N/A LINE 827: 3-E63 LINE 828: (ADA BRAILLE: 3-E63) LINE 829: N/A LINE 830: N/A LINE 831: 3-E62 LINE 832: (ADA BRAILLE: 3-E62) LINE 833: N/A LINE 834: N/A LINE 835: 3-E61 LINE 836: (ADA BRAILLE: 3-E61) LINE 837: N/A LINE 838: N/A LINE 839: 3-E60 LINE 840: (ADA BRAILLE: 3-E60) LINE 841: N/A LINE 842: N/A LINE 843: 3-E59 LINE 844: (ADA BRAILLE: 3-E59) LINE 845: N/A LINE 846: N/A LINE 847: 3-E58 LINE 848: (ADA BRAILLE: 3-E58) LINE 849: N/A LINE 850: N/A LINE 851: 3-E57 LINE 852: (ADA BRAILLE: 3-E57) LINE 853: N/A LINE 854: N/A	

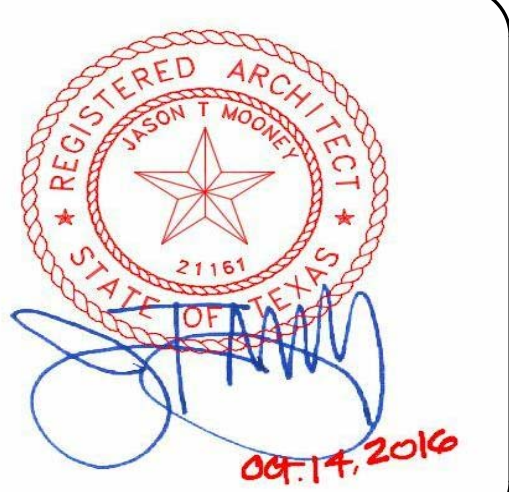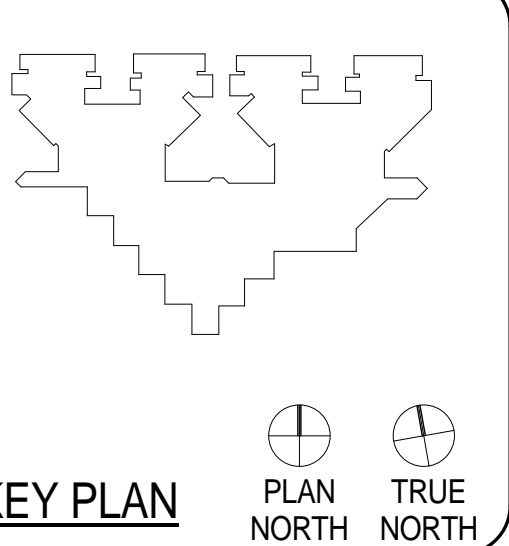

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	Author	
CHECKED BY:	Checker	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
FIRST FLOOR FINISH PLAN - UNIT 1C

A2.19C

GENERAL FINISH PLAN NOTES

- REFER TO INTERIOR ELEVATIONS, AS REFERENCED ON ARCHITECTURAL PLANS, FOR ADDITIONAL INFORMATION.
- SUBMIT SAMPLES OF ALL SCHEDULED FINISHES FOR APPROVAL, PRIOR TO ORDERING.
- ALL INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH EACH MANUFACTURER'S INSTRUCTIONS.
- AFTER PROJECT COMPLETION, ALL FINISHES AND SURFACES TO BE THOROUGHLY CLEANED.
- ALL INTERIOR FINISHES FOR WALLS, CEILINGS AND FLOORS COMPLY WITH IBC 2012 SECTION 803 & 804:
* FLOORING - VINYL FLOORING - FLOORING RADIANT PANEL TEST (ASTM-E-648) PASSES CLASS 1
* WALL BASE - CLASS C
* ACOUSTICAL CEILING - CLASS A
- ALL PAINT FINISHES PT-1 ON WALLS, UNLESS NOTED OTHERWISE.
- ALL NEW OR REPLACEMENT SUSPENDED CEILING TO BE 24x24 ACT, UNLESS NOTED OTHERWISE.

FINISH PLAN LEGEND

ROOM FINISH TAG

ACT	CEILING FINISH
W/C	WALL FINISH
RB	WALL BASE FINISH
VCT	FLOOR FINISH

MILLWORK FINISH TAG

SS-1	COUNTERTOPS, BENCHES / HORIZONTAL SURFACE FINISH
PL-2	MILLWORK IN AND OUT SIDE/ VERTICAL SURFACE FINISH

P1 DENOTES ACCENT WALL PAINT

• DENOTES MULTIPLE FINISHES. REFER TO ENLARGED PLANS AND/OR ELEVATIONS FOR INFORMATION.

1 KEYNOTE

CG PAWLING PRO-TEK MODEL CG-10 CORNER GUARD

SH SILL HEIGHT

FINISH SECTIONS - CEILINGS

GWB	GYPSUM BOARD CEILING WITH CL-3 FINISH (ALL PATIENT ROOMS & RESTROOMS)
ACT	24X24 ACOUSTICAL CEILING SAND MICRO TILES (ALL PUBLIC AREAS AND SUPPORT/STAFF AREAS; REPLACE THROUGHOUT; ALL OTHER EXISTING ACT GRID TO BE PAINTED WHITE)
CL-3	SHERWIN WILLIAMS 'EAGLET BEIGE' #7573, EGG SHELL FINISH

FINISH SECTIONS - WALLS

PT-1	SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'EAGLET BEIGE' # 7573
PT-3	SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'RAIN' # 6219
PTP-4	(WALL MAIN) AMERICAN OLEAN 10"X14" 'DURANGO CREAM' # SC85 BRICK JOINT, VERTICALLY INSTALLED (RESTROOMS)
PTP-5	(WALL - ACCENT STRIP) AMERICAN OLEAN - GLASS & NATURAL STONE 3" X RANDOM MOSAIC 'COLOR APPEAL: PACIFIC COAST BLEND' #C136 (RESTROOMS)
GBL-1	(PARTIAL WALL SHOWERS) GLASS BLOCKS 12x12x4 PITTSBURGH CORNING - 'DECORA LX PATTERN'

FINISH SECTIONS - FLOORING

LVT-1	KARNDLEAN 36" X 6" - 'OPUS: PALLEO' # WP312
LVT-2	KARNDLEAN 36" X 4" - 'OPUS: GOLDEN TEAK' # WP513
PTP-1	BPI VINTAGEWOOD 6" X 36" PLANKS - 'DUNE' # 62-700 (RESTROOM MAIN FLOOR)
PTP-2	AMERICAN OLEAN 2X2 MOSAIC - 'SALCEDO: DURANGO CREAM' # SC85 (INSIDE SHOWER)

* PATTERNS INDICATE DIRECTIONAL FLOOR PATTERN

FINISH SECTIONS - WALL BASE

RB-1	4" RUBBER WALL BASE TO BE STANDARD - FLEXCO - COVE 'CAPPUCCINO' # 65
WB	WALL BASE. COVE TYPE TO MATCH FLOOR TILE TYPE AND SIZE (ALL RESTROOMS)

FINISHES - DOOR & WINDOW FRAMES


PT-8	PAINT- INTERIOR DOOR FRAMES - SHERWIN WILLIAMS PROMAR 200 INTERIOR ALKYD 'DORMER BROWN'
------	---

GROUT

G-1	(BATHROOM WALL) LATICRETE 'ANTIQUE WHITE' #23
G-2	(BATHROOM FLOOR) LATICRETE 'BUTTERCREAM' #81



FINISH SECTIONS - MILLWORK

PL-1	WILSONART 'DESERT ZEPHYR' #4841-60
PL-2	WILSONART #6257 (419) SATIN BRUSHED NATURAL ALUMINUM
PL-3	WILSONART #7951K-18 'ASIAN SUN'
CO-1	CORIAN 'COTTAGE LINE'

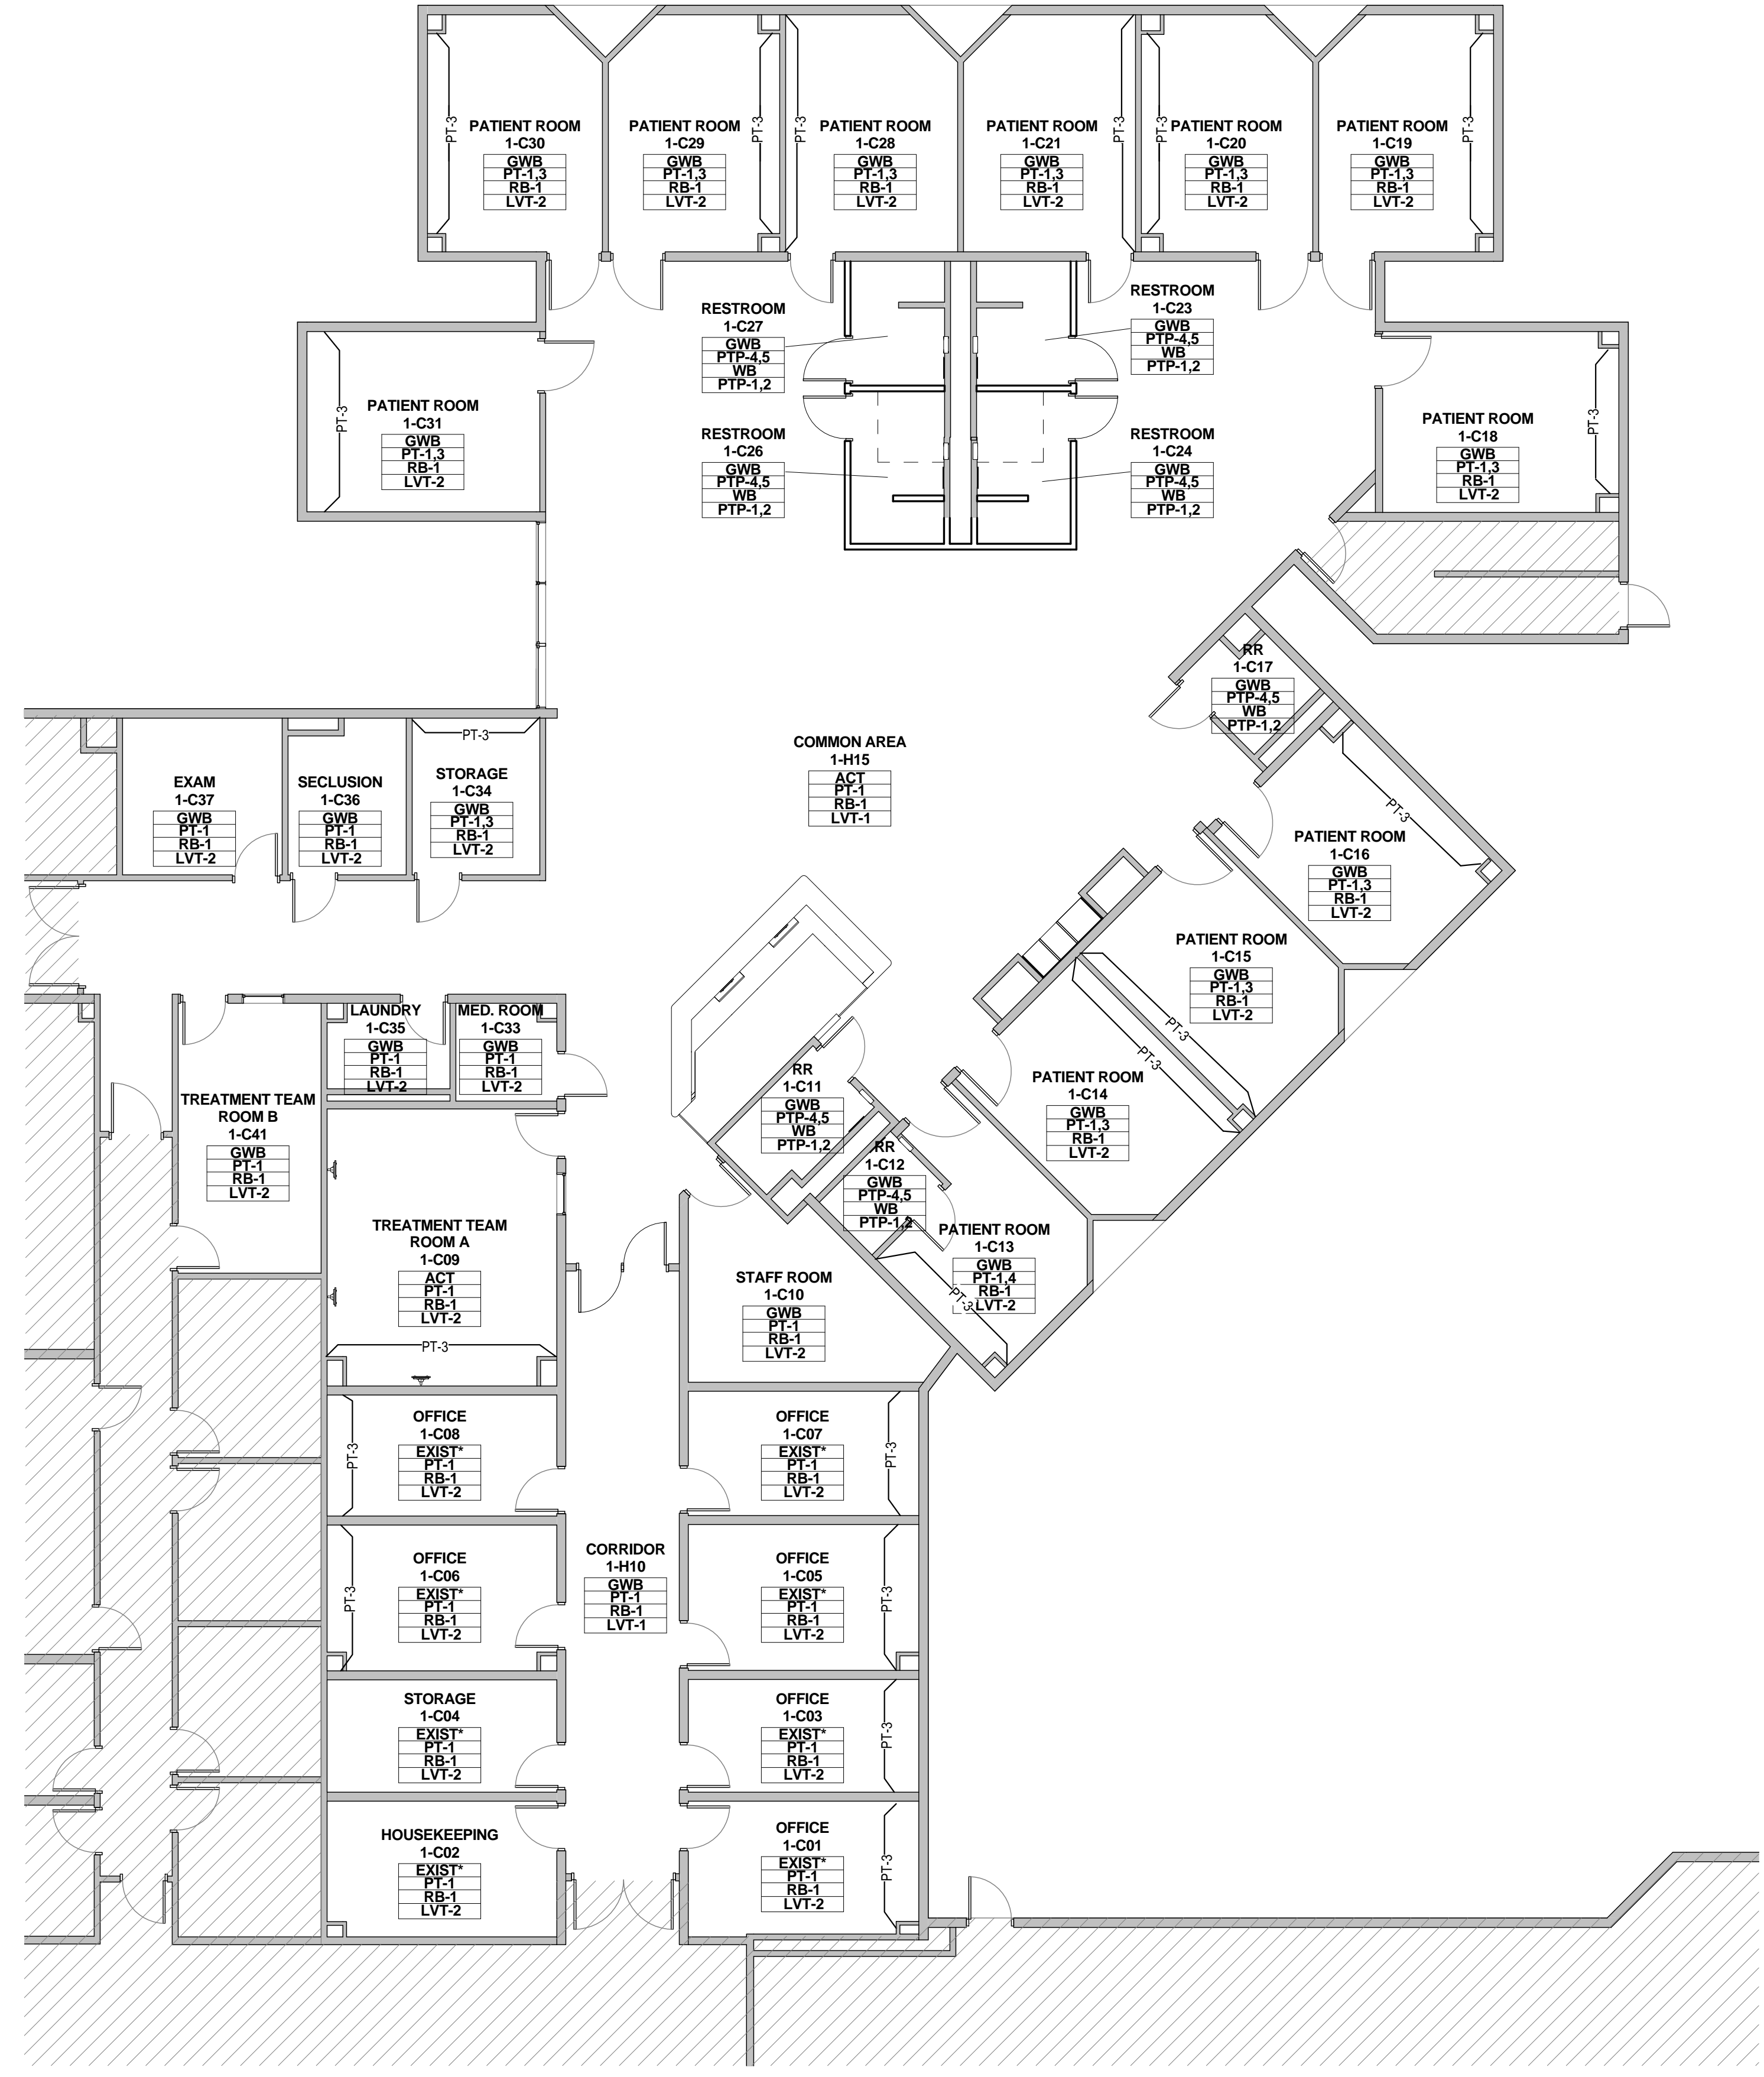

NOTE:
*PAINT EXISTING GYP BD WITH NEW PAINT COAT PT-1

\\pbk02\projects_hou\1616\106\Drawings\BIM\REV\T\MODEL_CENTRAL\ARCH\16106-HCPC-A16_Central.rvt
10/13/2016 2:28:06 PM

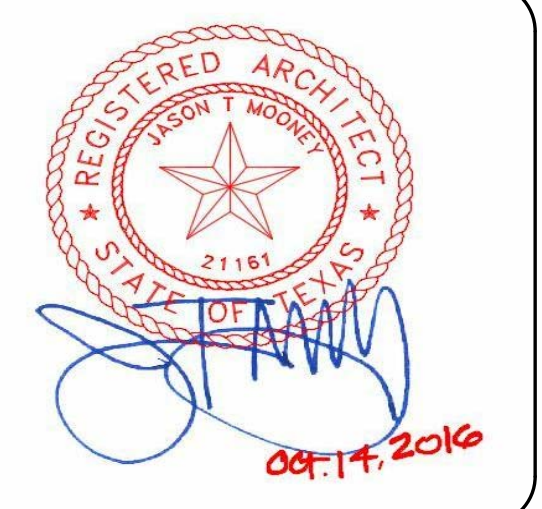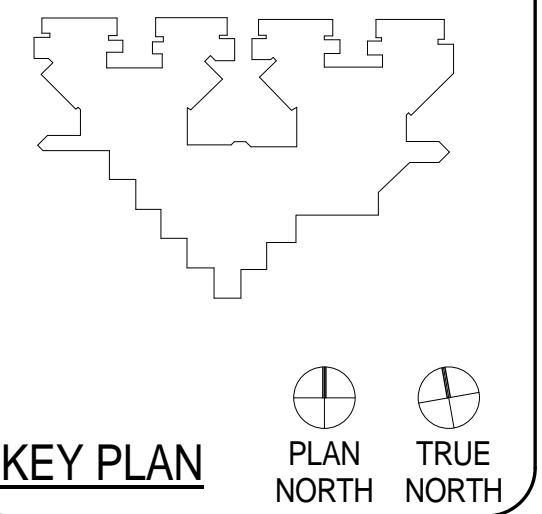

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**SECOND FLOOR
FINISH PLAN - UNIT
2E**

A2.20E

GENERAL FINISH PLAN NOTES

- REFER TO INTERIOR ELEVATIONS, AS REFERENCED ON ARCHITECTURAL PLANS, FOR ADDITIONAL INFORMATION.
- SUBMIT SAMPLES OF ALL SCHEDULED FINISHES FOR APPROVAL, PRIOR TO ORDERING.
- ALL INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH EACH MANUFACTURER'S INSTRUCTIONS.
- AFTER PROJECT COMPLETION, ALL FINISHES AND SURFACES TO BE THOROUGHLY CLEANED.
- ALL INTERIOR FINISHES FOR WALLS, CEILINGS AND FLOORS COMPLY WITH IBC 2012 SECTION 803 & 804.
* FLOORING - VINYL FLOORING - FLOORING RADIANT PANEL TEST (ASTM-E-648)
* WALLS - CLASS C
* ACoustICAL CEILING - CLASS A
- ALL PAINT FINISHES PT-1 ON WALLS, UNLESS NOTED OTHERWISE.
- ALL NEW OR REPLACEMENT SUSPENDED CEILING TO BE 24x24 ACT, UNLESS NOTED OTHERWISE.

FINISH PLAN LEGEND

- ROOM FINISH TAG**
- ACT CEILING FINISH
 - WB WALL FINISH
 - RB WALL BASE FINISH
 - LVT FLOOR FINISH
- MILLWORK FINISH TAG**
- SS-1 COUNTERTOPS, BENCHES / HORIZONTAL SURFACE FINISH
 - PL-2 MILLWORK IN AND OUT SIDE / VERTICAL SURFACE FINISH
- P1 DENOTES ACCENT WALL PAINT
- DENOTES MULTIPLE FINISHES. REFER TO ENLARGED PLANS AND/OR ELEVATIONS FOR INFORMATION.
- 1 KEYNOTE
- CG PAWLING PRO-TEK MODEL CG-10 CORNER GUARD
- SH SILL HEIGHT

FINISH SECTIONS - CEILINGS

- GWB GYPSUM BOARD CEILING WITH CL-3 FINISH (ALL PATIENT ROOMS & RESTROOMS)
- ACT 24X24 ACOUSTICAL CEILING SAND MICRO TILES (ALL PUBLIC AREAS AND SUPPORT/STAFF AREAS; REPLACE THROUGHOUT; ALL OTHER EXISTING ACT GRID TO BE PAINTED WHITE)
- CL-3 SHERWIN WILLIAMS 'EAGLET BEIGE' #7573, EGGSHELL FINISH

FINISH SECTIONS - WALLS

- PT-1 SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'EAGLET BEIGE' # 7573
- PT-3 SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'RAIN' # 6219
- PTP-4 (WALL MAIN) AMERICAN OLEAN 10"X14" 'DURANGO CREAM' # SC85 BRICK JOINT, VERTICALLY INSTALLED (RESTROOMS)
- PTP-5 (WALL: ACCENT STRIP) AMERICAN OLEAN - GLASS & NATURAL STONE 3 X RANDOM MOSAIC 'COLOR APPEAL: PACIFIC COAST BLEND' #C136 (RESTROOMS)
- GBL-1 (PARTIAL WALL SHOWERS) GLASS BLOCKS 12x12x4 PITTSBURGH CORNING - 'DECORA LX PATTERN'

FINISH SECTIONS - FLOORING

- LVT-1 : KARNDIAN 36" X 6" - 'OPUS: PALLEO' # WP312
 - LVT-2 : KARNDIAN 36" X 4" - 'OPUS: GOLDEN TEAK' # WP513
 - PTP-1 : BPI VINTAGEWOOD 6" X 36" PLANKS - 'DUNE' # 62-700 (RESTROOM MAIN FLOOR)
 - PTP-2 : AMERICAN OLEAN 2X2 MOSAIC - 'SALCEDO: DURANGO CREAM' # SC85 (INSIDE SHOWER)
- *PATTERNS INDICATE DIRECTIONAL FLOOR PATTERN

FINISH SECTIONS - WALL BASE

- RB-1 4" RUBBER WALL BASE TO BE STANDARD - FLEXCO - COVE 'CAPPUCCINO' # 65
- WB WALL BASE: COVE TYPE TO MATCH FLOOR TILE TYPE AND SIZE (ALL RESTROOMS)

FINISHES - DOOR & WINDOW FRAMES


- PT-8 PAINT- INTERIOR DOOR FRAMES - SHERWIN WILLIAMS PROMAR 200 INTERIOR ALKYD 'DORMER BROWN'

GROUT

- G-1 (BATHROOM WALL) LATICRETE 'ANTIQUE WHITE' #23
- G-2 (BATHROOM FLOOR) LATICRETE 'BUTTERCREAM' #81



FINISH SECTIONS - MILLWORK

- PL-1 WILSONART 'DESERT ZEPHYR' #4841-60
- PL-2 WILSONART #6257 (419) SATIN BRUSHED NATURAL ALUMINUM
- PL-3 WILSONART #7951K-18 'ASIAN SUN'
- CG-1 CORIAN 'COTTAGE LINE'

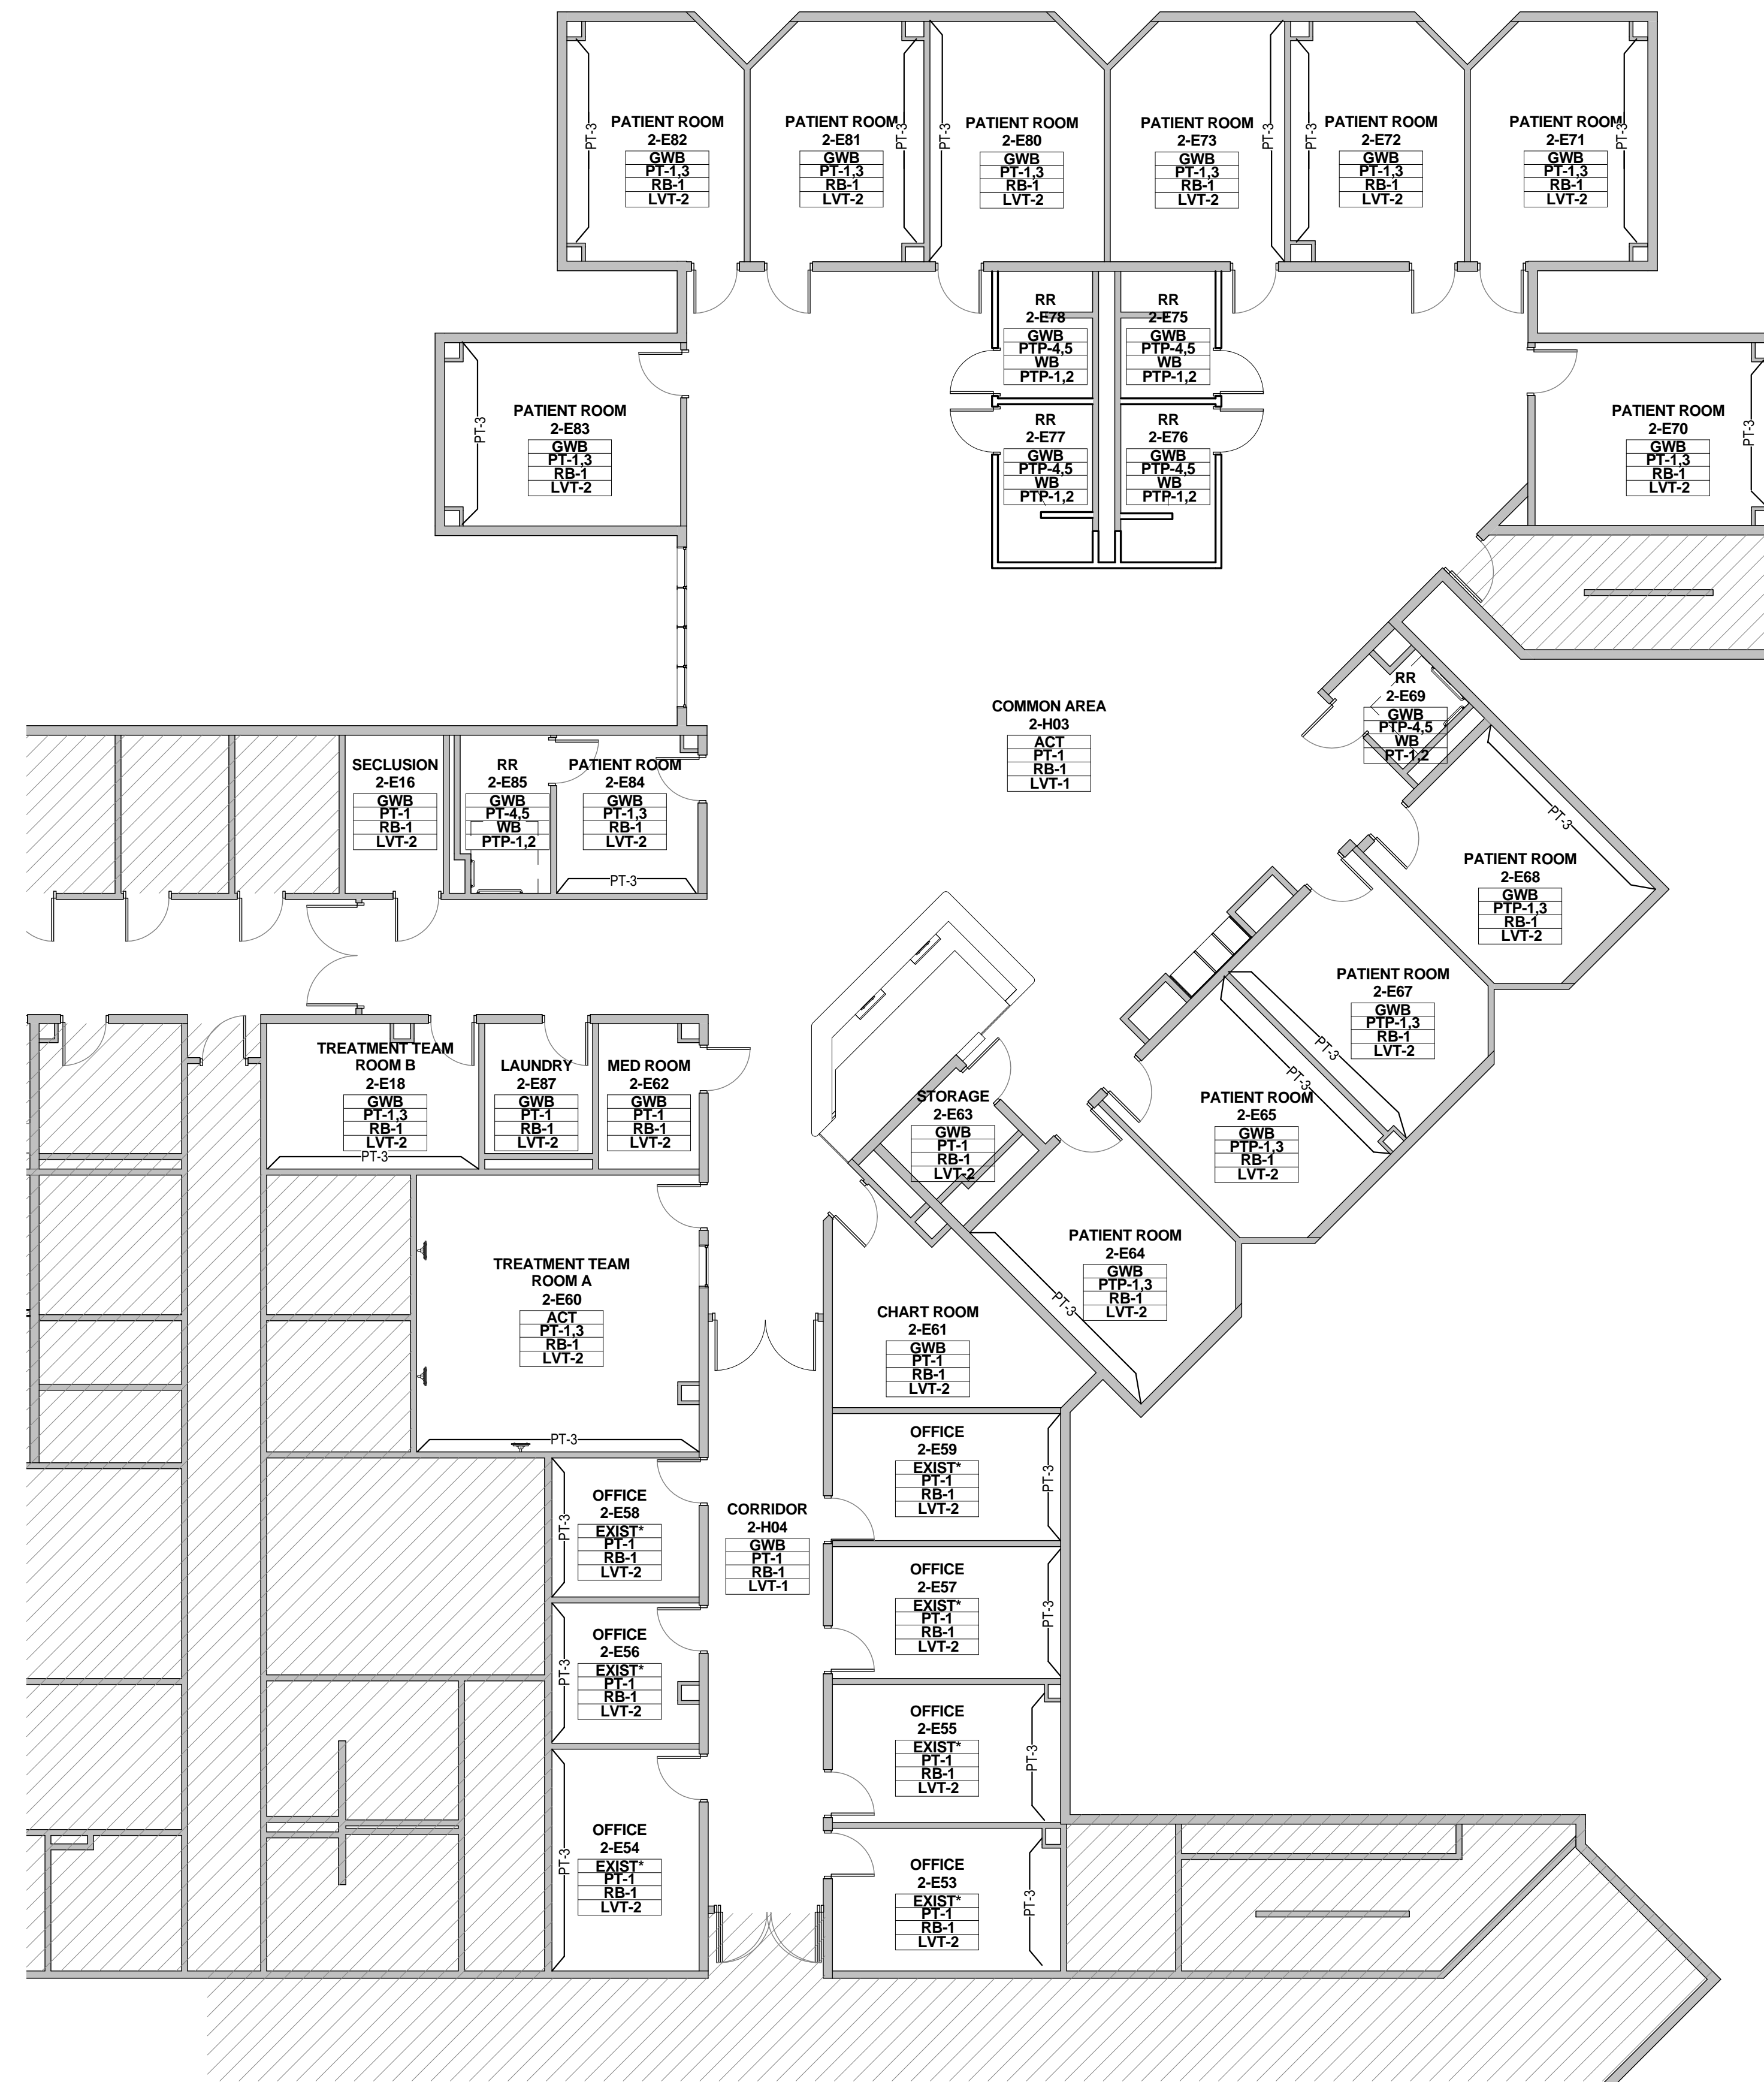

NOTE:
*PAINT EXISTING GYP BD WITH NEW PAINT COAT PT-1

\\pbk02\projects_hou\16106\Drawings\BIM\REVIT\MODEL_CENTRALS\ARCH\16106-HCPC-A16_Central.rvt
10/13/2016 2:28:17 PM

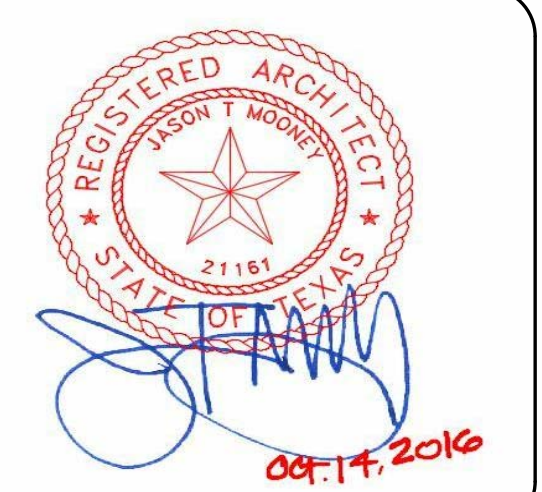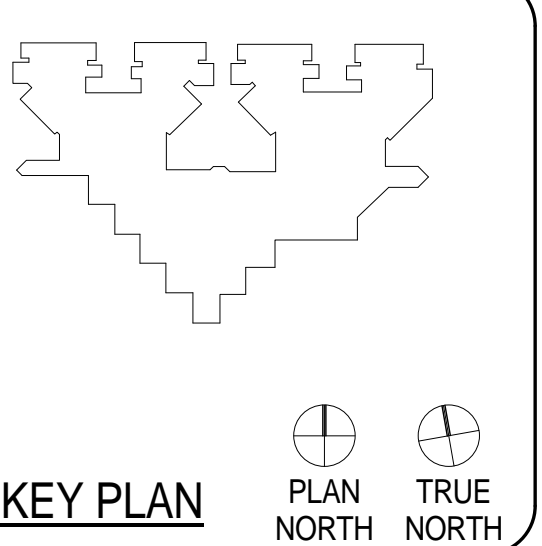

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**THIRD FLOOR FINISH
 PLAN - UNIT 3B**

A2.21B

GENERAL FINISH PLAN NOTES

- REFER TO INTERIOR ELEVATIONS, AS REFERENCED ON ARCHITECTURAL PLANS, FOR ADDITIONAL INFORMATION.
- SUBMIT SAMPLES OF ALL SCHEDULED FINISHES FOR APPROVAL PRIOR TO ORDERING.
- ALL INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH EACH MANUFACTURER'S INSTRUCTIONS.
- AFTER PROJECT COMPLETION, ALL FINISHES AND SURFACES TO BE THOROUGHLY CLEANED.
- ALL INTERIOR FINISHES FOR WALLS, CEILINGS AND FLOORS COMPLY WITH IBC 2012 SECTION 803 & 804:
 * FLOORING - VINYL FLOORING - FLOORING RADIANT PANEL TEST (ASTM-E-648) PASSES CLASS 1
 * WALL BASE - CLASS C
 * ACOUSTICAL CEILING - CLASS A
- ALL PAINT FINISHES PT-1 ON WALLS, UNLESS NOTED OTHERWISE.
- ALL NEW OR REPLACEMENT SUSPENDED CEILING TO BE 24x24 ACT, UNLESS NOTED OTHERWISE.

FINISH PLAN LEGEND

ROOM FINISH TAG

ACT	CEILING FINISH
WVC	WALL FINISH
RB	WALL BASE FINISH
VCT	FLOOR FINISH

MILLWORK FINISH TAG

SS-1	COUNTERTOPS, BENCHES / HORIZONTAL SURFACE FINISH
PL-2	MILLWORK IN AND OUT SIDE / VERTICAL SURFACE FINISH

P1 DENOTES ACCENT WALL PAINT

• DENOTES MULTIPLE FINISHES. REFER TO ENLARGED PLANS AND/OR ELEVATIONS FOR INFORMATION.

1 KEYNOTE

CG PAWLING PRO-TEK MODEL CG-10 CORNER GUARD

SH SILL HEIGHT

FINISH SECTIONS - CEILINGS

- | | |
|------|---|
| GWB | GYPSON BOARD CEILING WITH CL-3 FINISH (ALL PATIENT ROOMS & RESTROOMS) |
| ACT | 24X24 ACOUSTICAL CEILING SAND MICRO TILES (ALL PUBLIC AREAS AND SUPPORT/STAFF AREAS, REPLACE THROUGHOUT; ALL OTHER EXISTING ACT GRID TO BE PAINTED WHITE) |
| CL-3 | SHERWIN WILLIAMS "EAGLE BEIGE" #7573, EGG SHELL FINISH |

FINISH SECTIONS - WALLS

- | | |
|-------|---|
| PT-1 | SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL "EAGLE BEIGE" # 7573 |
| PT-3 | SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL "RAIN" # 6219 |
| PTP-4 | (WALL MAIN) AMERICAN OLEAN 10"X14" "DURANGO CREAM" # SC85 BRICK JOINT, VERTICALLY INSTALLED (RESTROOMS) |
| PTP-5 | (WALL: ACCENT STRIP) AMERICAN OLEAN - GLASS & NATURAL STONE 3 X RANDOM MOSAIC "COLOR APPEAL: PACIFIC COAST BLEND" #C136 (RESTROOMS) |
| GBL-1 | (PARTIAL WALL SHOWERS) GLASS BLOCKS 12x12x4 PITTSBURGH CORNING - "DECORA LX PATTERN" |

FINISH SECTIONS - FLOORING

- | | |
|-------|---|
| LVT-1 | KARDEAN 36" X 6" - "OPUS: PALLEO" # WP312 |
| LVT-2 | KARDEAN 36" X 4" - "OPUS: GOLDEN TEAK" # WP513 |
| PTP-1 | BPI VINTAGEWOOD 6" X 36" PLANKS - "DUNE" # 62-700 (RESTROOM MAIN FLOOR) |
| PTP-2 | AMERICAN OLEAN 2X2 MOSAIC - "SALCEDO: DURANGO CREAM" # SC85 (INSIDE SHOWER) |
- *PATTERNS INDICATE DIRECTIONAL FLOOR PATTERN

FINISH SECTIONS - WALL BASE

- | | |
|------|--|
| RB-1 | 4" RUBBER WALL BASE TO BE STANDARD - FLEXCO - COVE "CAPPUCCINO" # 65 |
| WB | WALL BASE, COVE TYPE TO MATCH FLOOR TILE TYPE AND SIZE (ALL RESTROOMS) |

FINISHES - DOOR & WINDOW FRAMES


- | | |
|------|---|
| PT-8 | PAINT- INTERIOR DOOR FRAMES - SHERWIN WILLIAMS PROMAR 200 INTERIOR ALKYD "DORMER BROWN" |
|------|---|

GROUT

- | | |
|-----|---|
| G-1 | (BATHROOM WALL) LATICRETE "ANTIQUE WHITE" #23 |
| G-2 | (BATHROOM FLOOR) LATICRETE "BUTTERCREAM" #81 |


FINISH SECTIONS - MILLWORK

- | | |
|------|--|
| PL-1 | WILSONART "DESERT ZEPHYR" #4841-60 |
| PL-2 | WILSONART #6257 (419) SATIN BRUSHED NATURAL ALUMINUM |
| PL-3 | WILSONART #7951K-18 "ASIAN SUN" |
| CO-1 | CORIAN "COTTAGE LINE" |

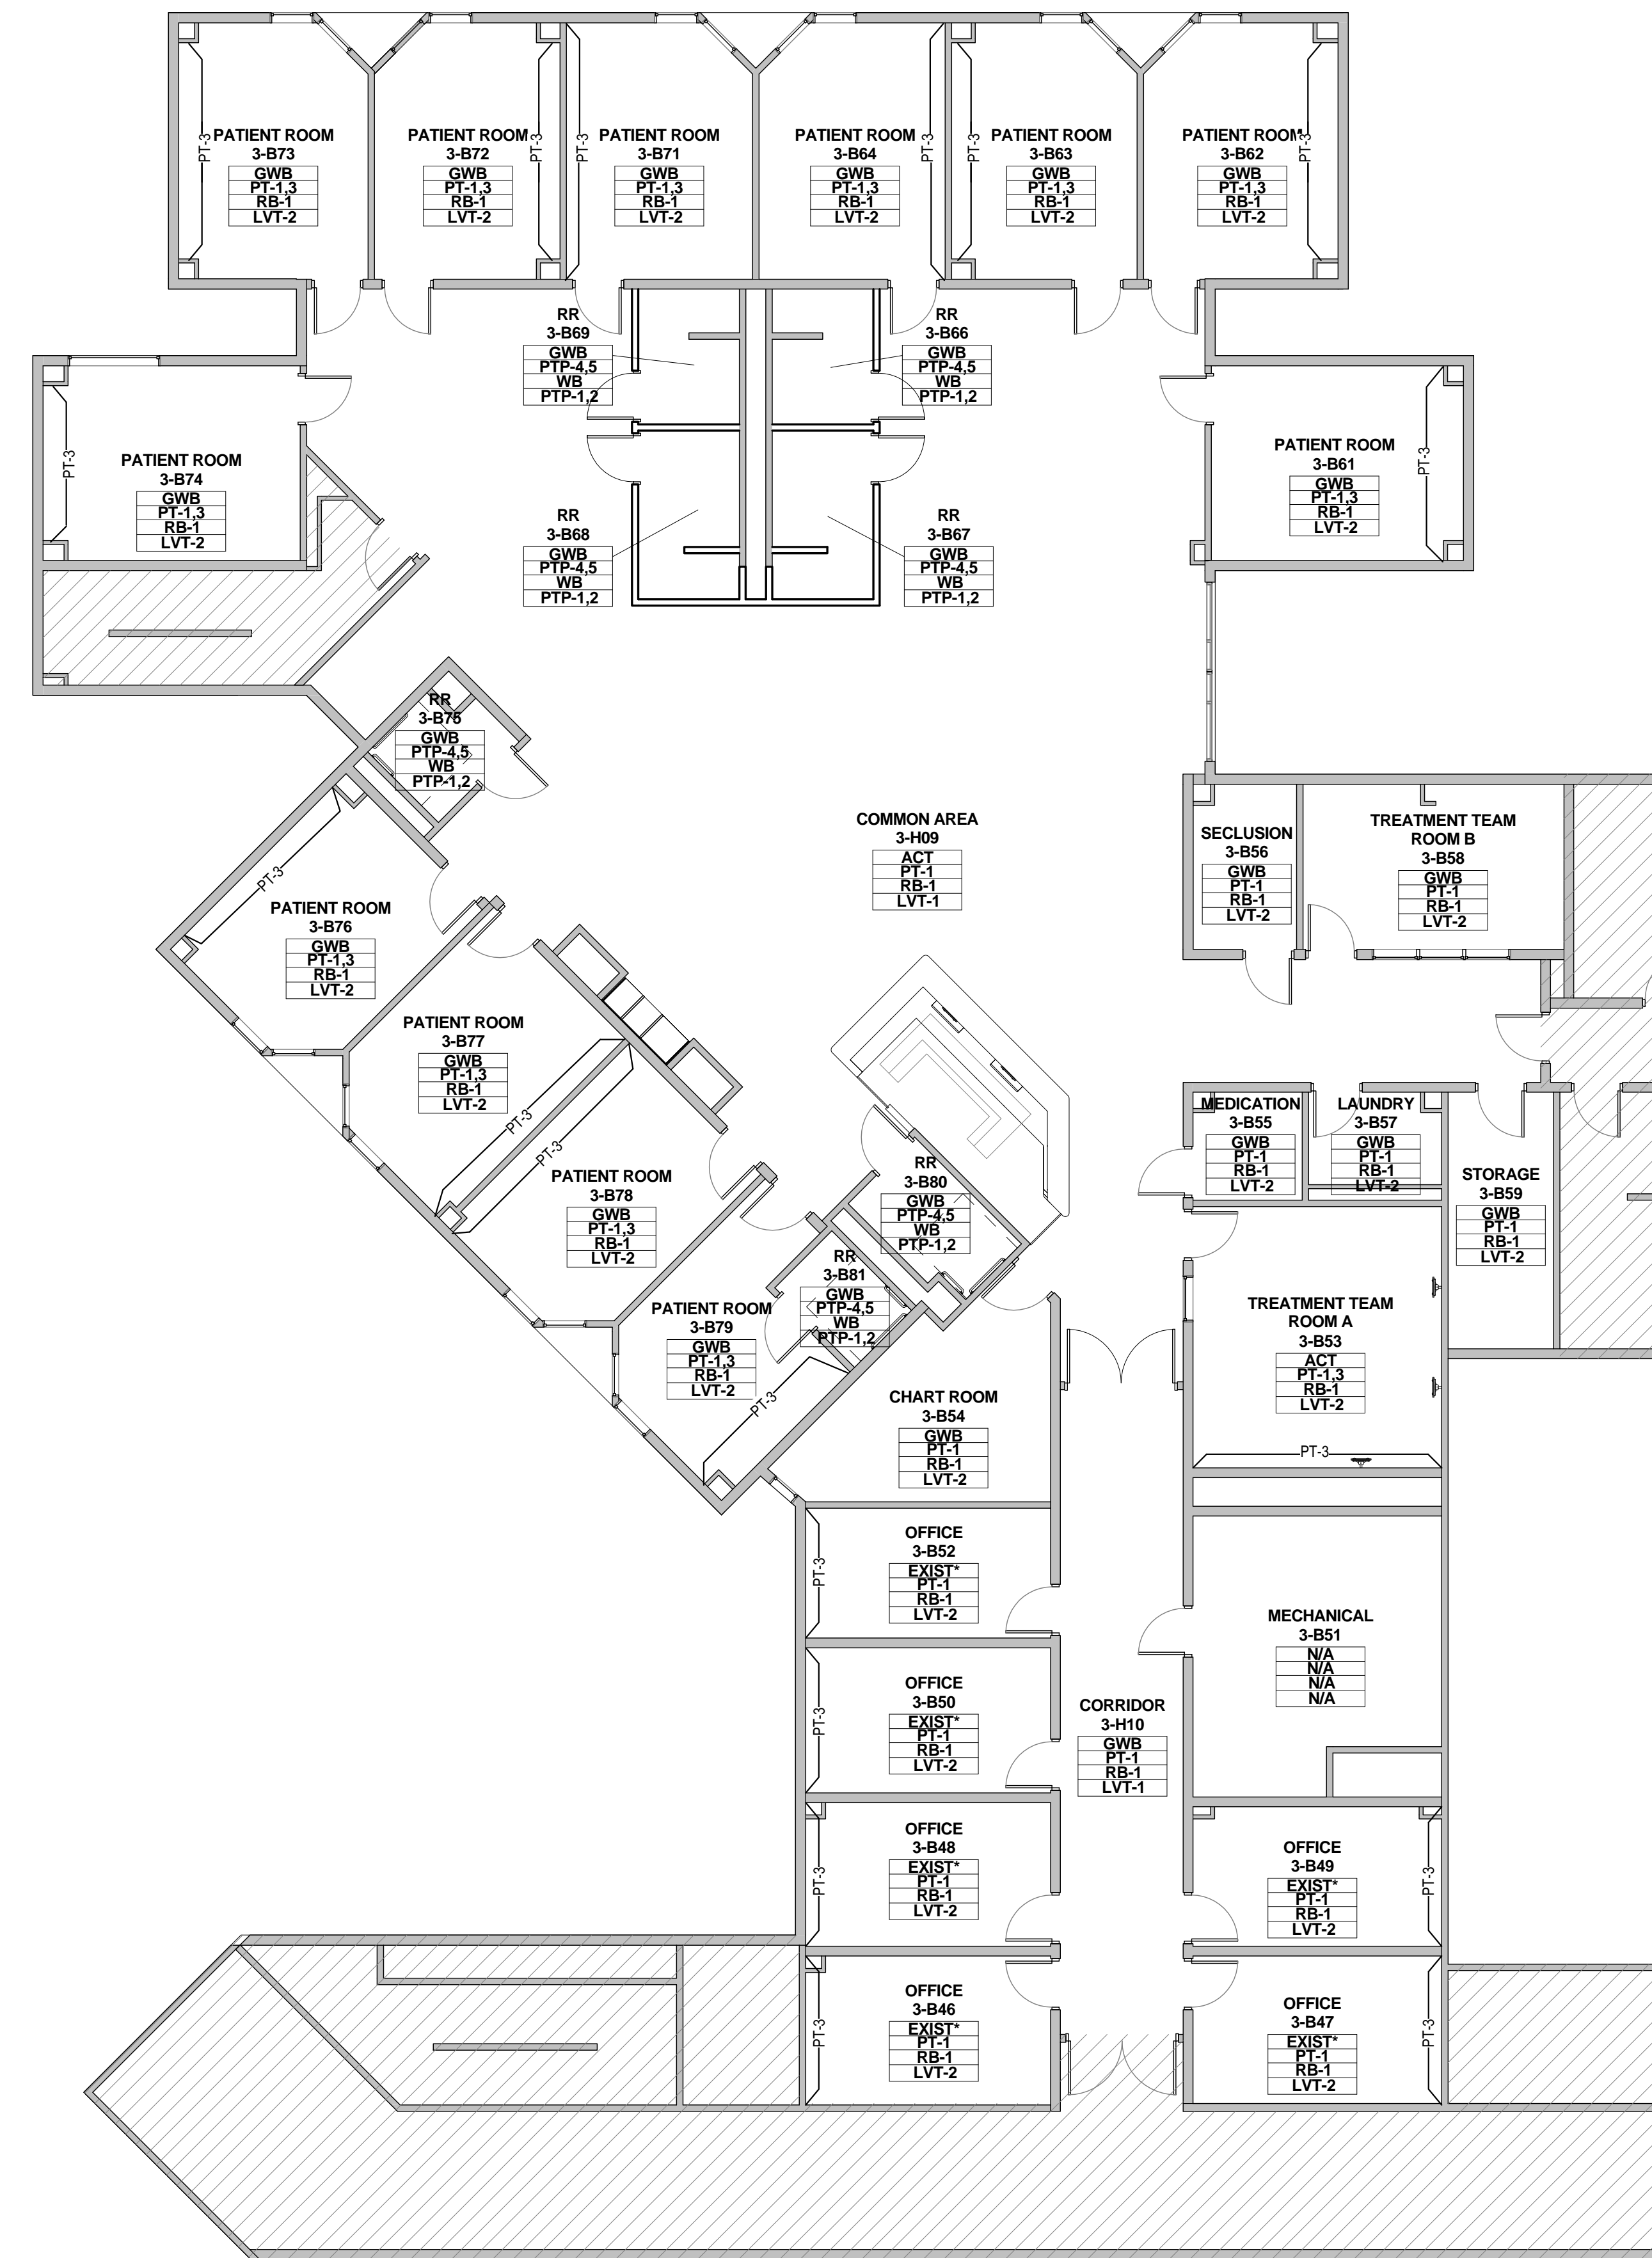

NOTE:
 *PAINT EXISTING GYP BD WITH NEW PAINT COAT PT-1

\\pbk02\projects_hou\1616\108\Drawings\BIM\REVIT\MODEL_CENTRALS\ARCH\16108-HCPC-A16_Central.rvt
 10/13/2016 2:28:28 PM

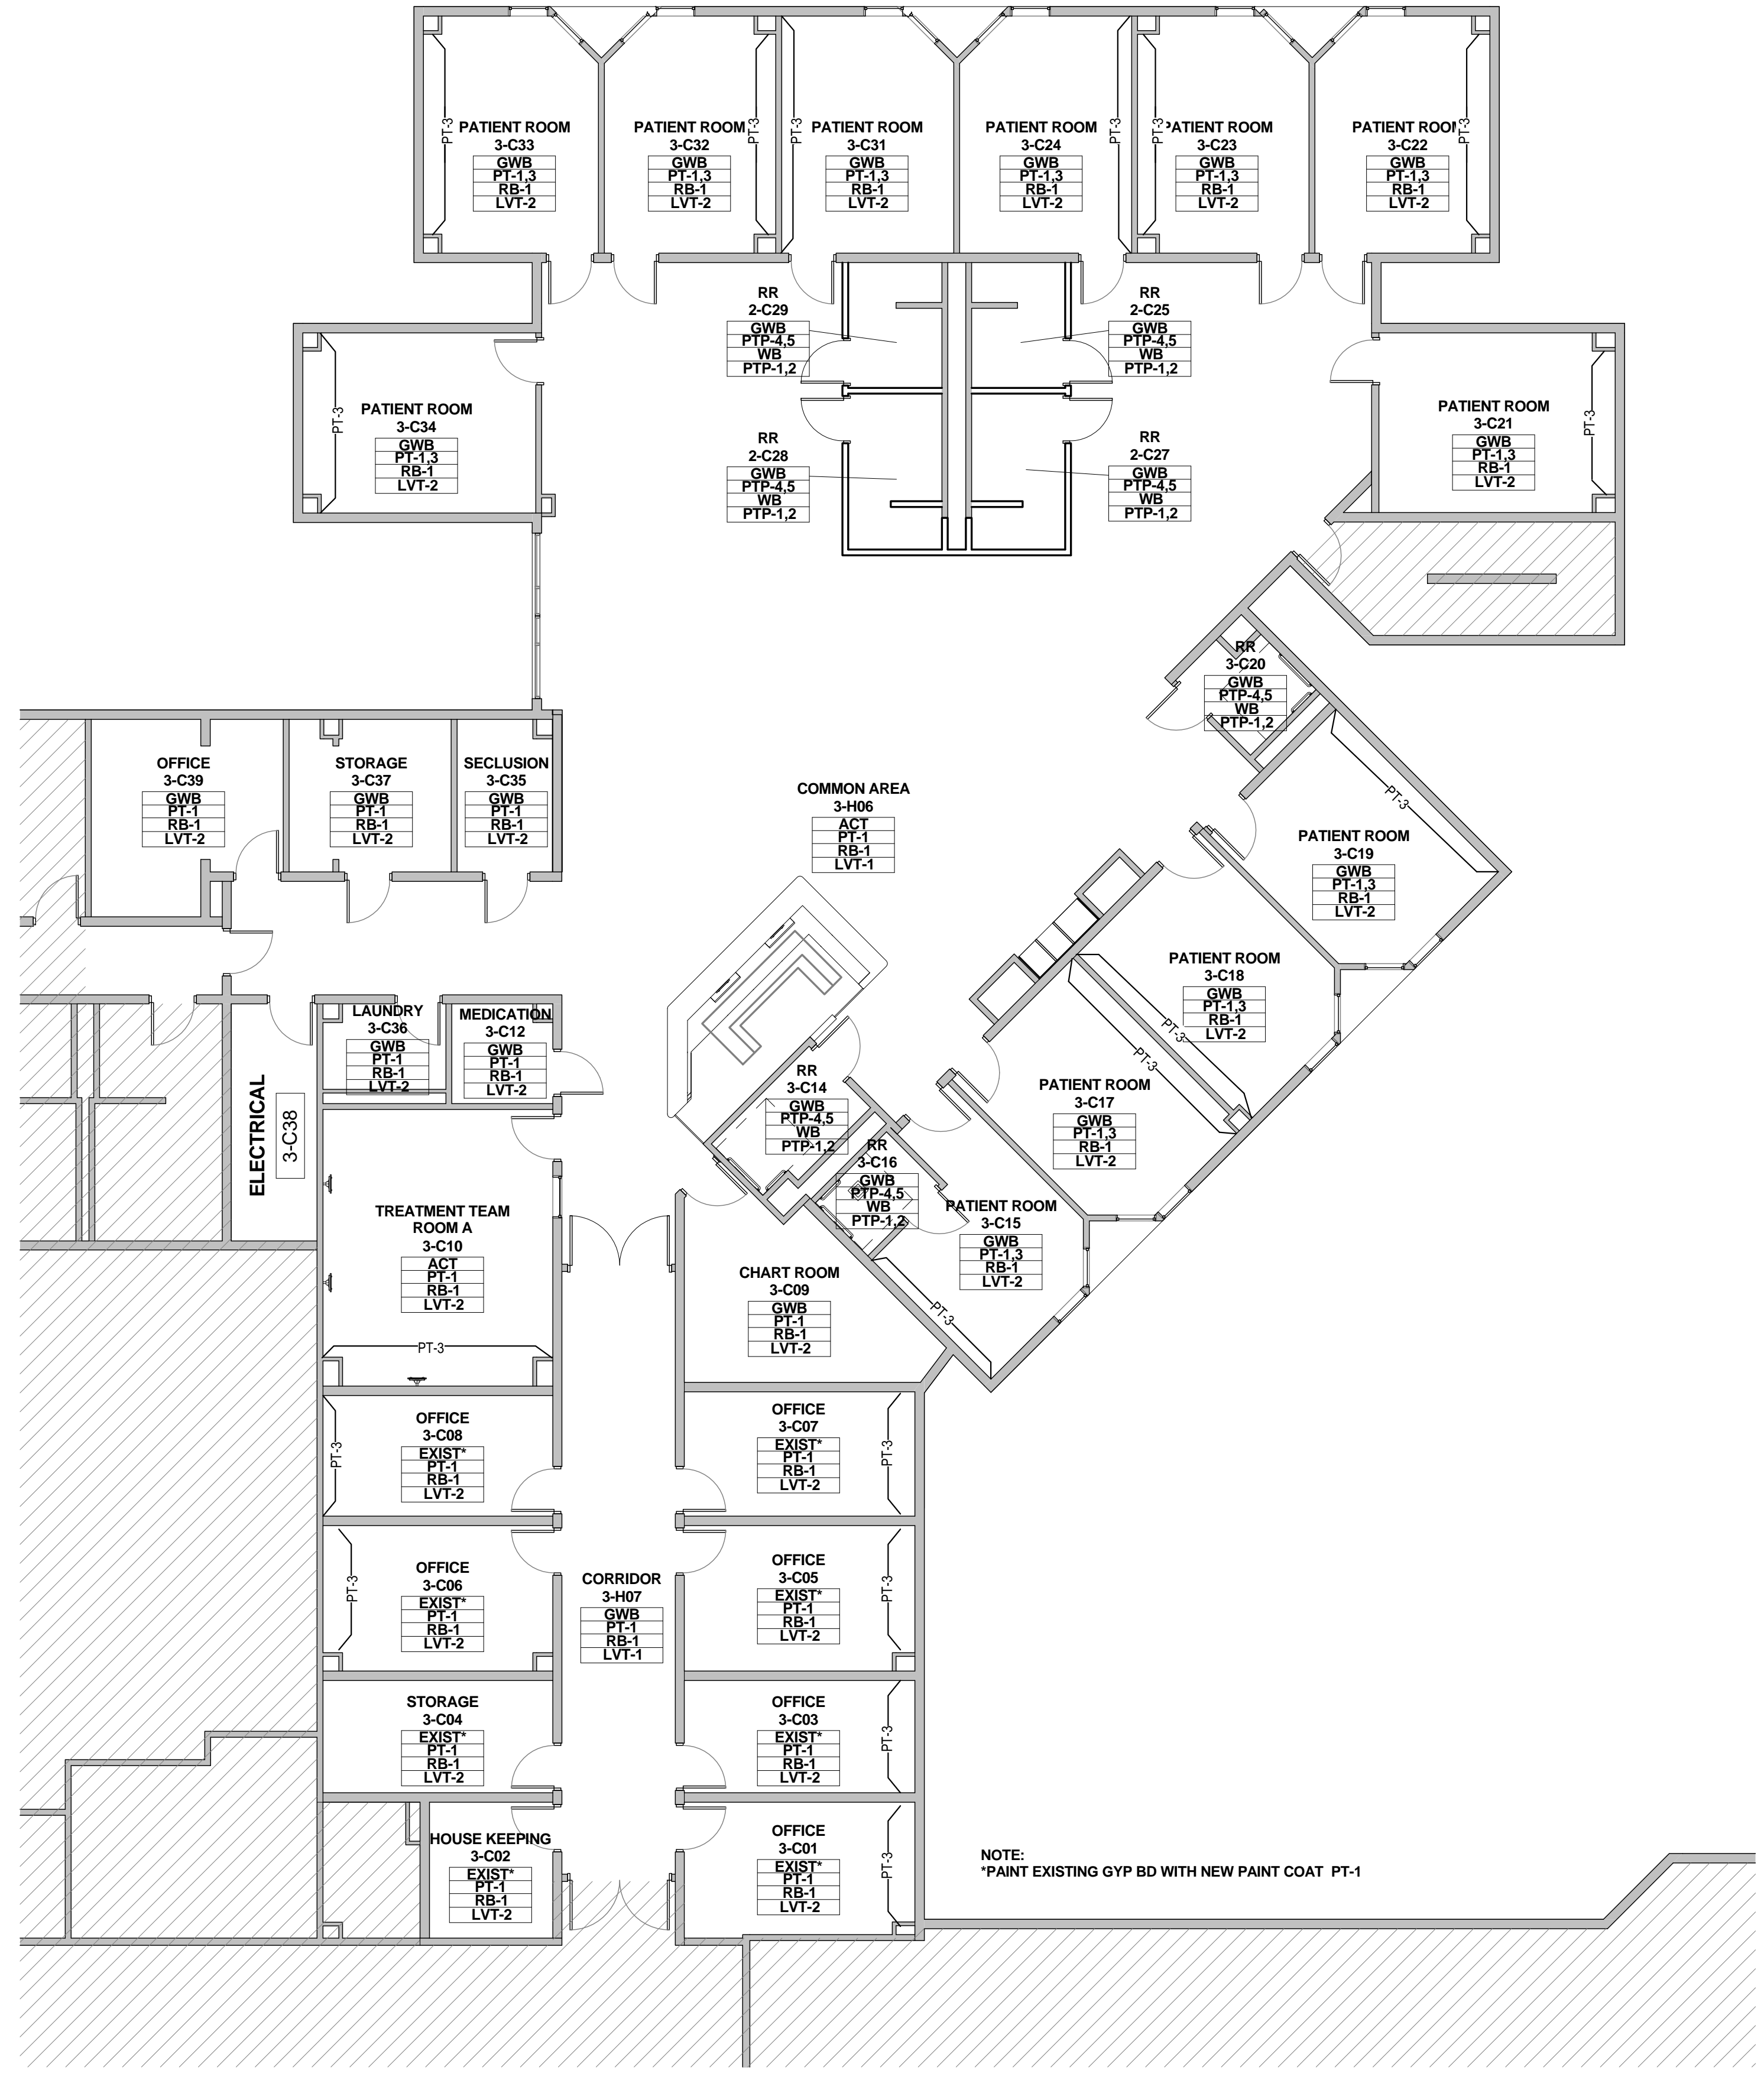

GENERAL FINISH PLAN NOTES

- REFER TO INTERIOR ELEVATIONS, AS REFERENCED ON ARCHITECTURAL PLANS, FOR ADDITIONAL INFORMATION.
- SUBMIT SAMPLES OF ALL SCHEDULED FINISHES FOR APPROVAL, PRIOR TO ORDERING.
- ALL INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH EACH MANUFACTURER'S INSTRUCTIONS.
- AFTER PROJECT COMPLETION, ALL FINISHES AND SURFACES TO BE THOROUGHLY CLEANED.
- ALL INTERIOR FINISHES FOR WALLS, CEILING AND FLOORS COMPLY WITH IBC 2012 SECTION 803 & 804:
 * FLOORING - VINYL FLOORING - FLOORING RADIANT PANEL TEST (ASTM-E-648) PASSES CLASS 1
 * WALL BASE - CLASS C
 * ACOUSTICAL CEILING - CLASS A
- ALL PAINT FINISHES PT-1 ON WALLS, UNLESS NOTED OTHERWISE.
- ALL NEW OR REPLACEMENT SUSPENDED CEILING TO BE 24x24 ACT, UNLESS NOTED OTHERWISE.

FINISH PLAN LEGEND

ROOM FINISH TAG

ACT	CEILING FINISH
WVC	WALL FINISH
RB	WALL BASE FINISH
VCT	FLOOR FINISH

MILLWORK FINISH TAG

SS-1	COUNTERTOPS, BENCHES / HORIZONTAL SURFACE FINISH
PL-2	MILLWORK IN AND OUT SIDE/ VERTICAL SURFACE FINISH

P1 DENOTES ACCENT WALL PAINT

• DENOTES MULTIPLE FINISHES. REFER TO ENLARGED PLANS AND/OR ELEVATIONS FOR INFORMATION.

1 KEYNOTE

CG PAWLING PRO-TEK MODEL CG-10 CORNER GUARD

SH SILL HEIGHT

FINISH SECTIONS - CEILINGS

GWB	GYPSON BOARD CEILING WITH CL-3 FINISH (ALL PATIENT ROOMS & RESTROOMS)
ACT	24X24 ACOUSTICAL CEILING SAND MICRO TILES (ALL PUBLIC AREAS AND SUPPORT/STAFF AREAS; REPLACE THROUGHOUT; ALL OTHER EXISTING ACT GRID TO BE PAINTED WHITE)
CL-3	SHERWIN WILLIAMS "EAGLET BEIGE" #7573, EGG SHELL FINISH

FINISH SECTIONS - WALLS

PT-1	SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL "EAGLET BEIGE" # 7573
PT-3	SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL "RAIN" # 6219
PTP-4	(WALL MAIN) AMERICAN OLEAN 10"X14" "DURANGO CREAM" # SC85 BRICK JOINT, VERTICALLY INSTALLED (RESTROOMS)
PTP-5	(WALL: ACCENT STRIP) AMERICAN OLEAN - GLASS & NATURAL STONE 3 X RANDOM MOSAIC "COLOR APPEAL: PACIFIC COAST BLEND" #C136 (RESTROOMS)
GBL-1	(PARTIAL WALL SHOWERS) GLASS BLOCKS 12x12x4 PITTSBURGH CORNING - "DECORA LX PATTERN"

FINISH SECTIONS - FLOORING

LVT-1	KARNDÉAN 36" X 6" - "OPUS: PALLEO" # WP312
LVT-2	KARNDÉAN 36" X 4" - "OPUS: GOLDEN TEAK" # WP513
PTP-1	BPI VINTAGEWOOD 6" X 36" PLANKS - "DUNE" # 62-700 (RESTROOM MAIN FLOOR)
PTP-2	AMERICAN OLEAN 2X2 MOSAIC - "SALCEDO: DURANGO CREAM" # SC85 (INSIDE SHOWER)

*PATTERNS INDICATE DIRECTIONAL FLOOR PATTERN

FINISH SECTIONS - WALL BASE

RB-1	4" RUBBER WALL BASE TO BE STANDARD - FLEXCO - COVE "CAPPUCCINO" # 65
WB	WALL BASE: COVE TYPE TO MATCH FLOOR TILE TYPE AND SIZE (ALL RESTROOMS)

FINISHES - DOOR & WINDOW FRAMES

PT-8	PAINT- INTERIOR DOOR FRAMES - SHERWIN WILLIAMS PROMAR 200 INTERIOR ALKYD "DORMER BROWN"
------	---

GROUT

G-1	(BATHROOM WALL) LATICRETE "ANTIQUE WHITE" #23
G-2	(BATHROOM FLOOR) LATICRETE "BUTTERCREAM" #81

FINISH SECTIONS - MILLWORK



PL-1	WILSONART "DESERT ZEPHYR" #4841-60
PL-2	WILSONART #6257 (419) SATIN BRUSHED NATURAL ALUMINUM
PL-3	WILSONART #7951K-18 "ASIAN SUN"
CO-1	CORIAN "COTTAGE LINE"



ARCHITECTURE
 PBK ARCHITECTS
 11 Greenway Plaza, 22nd Floor
 Houston, TX 77046
 713.965.0659 P
 713.961.4571 F
 TX Firm F-33709
 PBK.com

MEP
 SHAH SMITH AND ASSOCIATES
 2825 S Wilcrest Dr #300
 HOUSTON, TX 77042
 (713) 790 - 7963

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

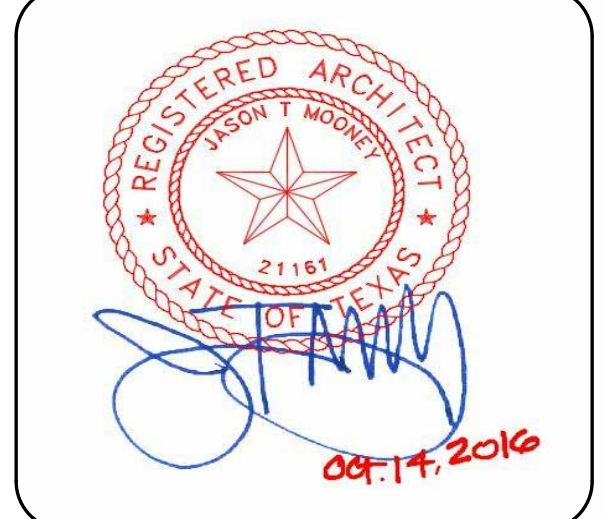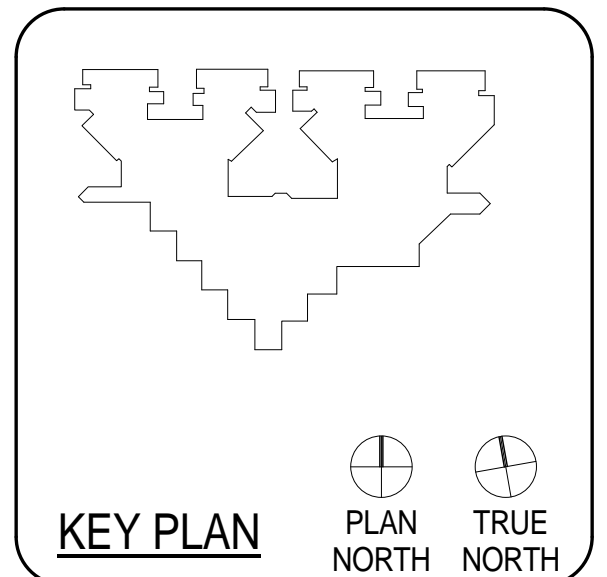


CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/JCS	
REVISIONS		
No.	Description	Date


ISSUE FOR BID
**THIRD FLOOR FINISH
 PLAN - UNIT 3C**

A2.22C

\\pbk02\projects_hou\1616\106\Drawings\BIM\REV\T\MODEL_CENTRALS\ARCH\16106-HCPC-A16_Central.rvt
 10/13/2016 2:28:42 PM

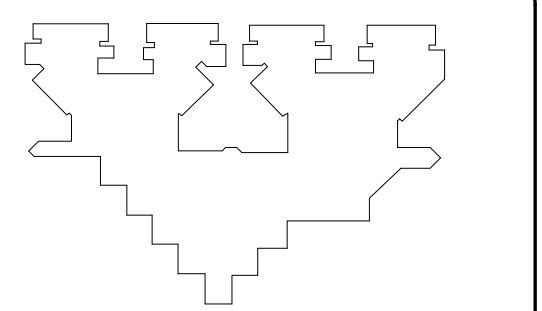

KEY PLAN PLAN NORTH TRUE NORTH

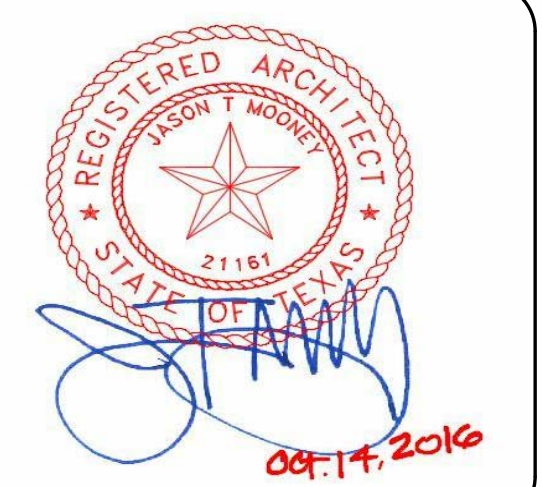

CLIENT	UT HEALTH	
PROJECT NUMBER	16106	
DATE:	OCTOBER 14, 2016	
DRAWN BY:	VG/BG	
CHECKED BY:	JM/CS	
REVISIONS		
No.	Description	Date

ISSUE FOR BID
**THIRD FLOOR FINISH
PLAN - UNIT 3E**

A2.24E

GENERAL FINISH PLAN NOTES

- REFER TO INTERIOR ELEVATIONS, AS REFERENCED ON ARCHITECTURAL PLANS, FOR ADDITIONAL INFORMATION.
- SUBMIT SAMPLES OF ALL SCHEDULED FINISHES FOR APPROVAL, PRIOR TO ORDERING.
- ALL INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH EACH MANUFACTURER'S INSTRUCTIONS.
- AFTER PROJECT COMPLETION, ALL FINISHES AND SURFACES TO BE THOROUGHLY CLEANED.
- ALL INTERIOR FINISHES FOR WALLS, CEILINGS AND FLOORS COMPLY WITH IBC 2012 SECTION 803 & 804:
* FLOORING - VINYL FLOORING - FLOORING RADIANT PANEL TEST (ASTM-E-648) PASSES CLASS 1
* WALL BASE - CLASS C
* ACOUSTICAL CEILING - CLASS A
- ALL PAINT FINISHES PT-1 ON WALLS, UNLESS NOTED OTHERWISE.
- ALL NEW OR REPLACEMENT SUSPENDED CEILING TO BE 24x24 ACT, UNLESS NOTED OTHERWISE.

FINISH PLAN LEGEND

ROOM FINISH TAG

- ACT CEILING FINISH
- WB WALL FINISH
- RB WALL BASE FINISH
- LVT FLOOR FINISH

MILLWORK FINISH TAG

- SS-1 COUNTERTOPS, BENCHES / HORIZONTAL SURFACE FINISH
- PL-2 MILLWORK IN AND OUT SIDE/ VERTICAL SURFACE FINISH

P1 DENOTES ACCENT WALL PAINT

DENOTES MULTIPLE FINISHES. REFER TO ENLARGED PLANS AND/OR ELEVATIONS FOR INFORMATION.

1 KEYNOTE

CG PAWLING PRO-TEK MODEL CG-10 CORNER GUARD

SH SILL HEIGHT

FINISH SECTIONS - CEILINGS

- GWB GYPSUM BOARD CEILING WITH CL-3 FINISH (ALL PATIENT ROOMS & RESTROOMS)
- ACT 24X24 ACOUSTICAL CEILING SAND MICRO TILES (ALL PUBLIC AREAS AND SUPPORT/STAFF AREAS; REPLACE THROUGHOUT; ALL OTHER EXISTING ACT GRID TO BE PAINTED WHITE)
- CL-3 SHERWIN WILLIAMS 'EAGLET BEIGE' #7573, EGGSELL FINISH

FINISH SECTIONS - WALLS

- PT-1 SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'EAGLET BEIGE' # 7573
- PT-3 SHERWIN WILLIAMS - SEMI-GLOSS LATEX ENAMEL 'RAIN' # 6219
- PTP-4 (WALL MAIN) AMERICAN OLEAN 10'X14" 'DURANGO CREAM' # SC85 BRICK JOINT, VERTICALLY INSTALLED (RESTROOMS)
- PTP-5 (WALL: ACCENT STRIP) AMERICAN OLEAN - GLASS & NATURAL STONE 3 X RANDOM MOSAIC 'COLOR APPEAL: PACIFIC COAST BLEND' #C136 (RESTROOMS)
- GBL-1 (PARTIAL WALL SHOWERS) GLASS BLOCKS 12x12x4 PITTSBURGH CORNING - 'DECORA LX PATTERN'

FINISH SECTIONS - FLOORING

- LVT-1: KARNDIAN 36" X 6" - 'OPUS: PALLEO' # WP312
 - LVT-2: KARNDIAN 36" X 4" - 'OPUS: GOLDEN TEAK' # WP513
 - PTP-1: BPI VINTAGEWOOD 6" X 36" PLANKS - 'DUNE' # 62-700 (RESTROOM MAIN FLOOR)
 - PTP-2: AMERICAN OLEAN 2X2 MOSAIC - 'SALCEDO: DURANGO CREAM' # SC85 (INSIDE SHOWER)
- *PATTERNS INDICATE DIRECTIONAL FLOOR PATTERN

FINISH SECTIONS - WALL BASE

- RB-1 4" RUBBER WALL BASE TO BE STANDARD - FLEXCO - COVE 'CAPPUCCINO' # 65
- WB WALL BASE: COVE TYPE TO MATCH FLOOR TILE TYPE AND SIZE (ALL RESTROOMS)

FINISHES - DOOR & WINDOW FRAMES


- PT-8 PAINT- INTERIOR DOOR FRAMES - SHERWIN WILLIAMS PROMAR 200 INTERIOR ALKYD 'DORMER BROWN'

GROUT

- G-1 (BATHROOM WALL) LATICRETE 'ANTIQUÉ WHITE' #23
- G-2 (BATHROOM FLOOR) LATICRETE 'BUTTERCREAM' #81

FINISH SECTIONS - MILLWORK

- PL-1 WILSONART 'DESERT ZEPHYR' #4841-60
- PL-2 WILSONART #6257 (419) SATIN BRUSHED NATURAL ALUMINUM
- PL-3 WILSONART #7951K-18 'ASIAN SUN'
- CO-1 CORIAN 'COTTAGE LINE'

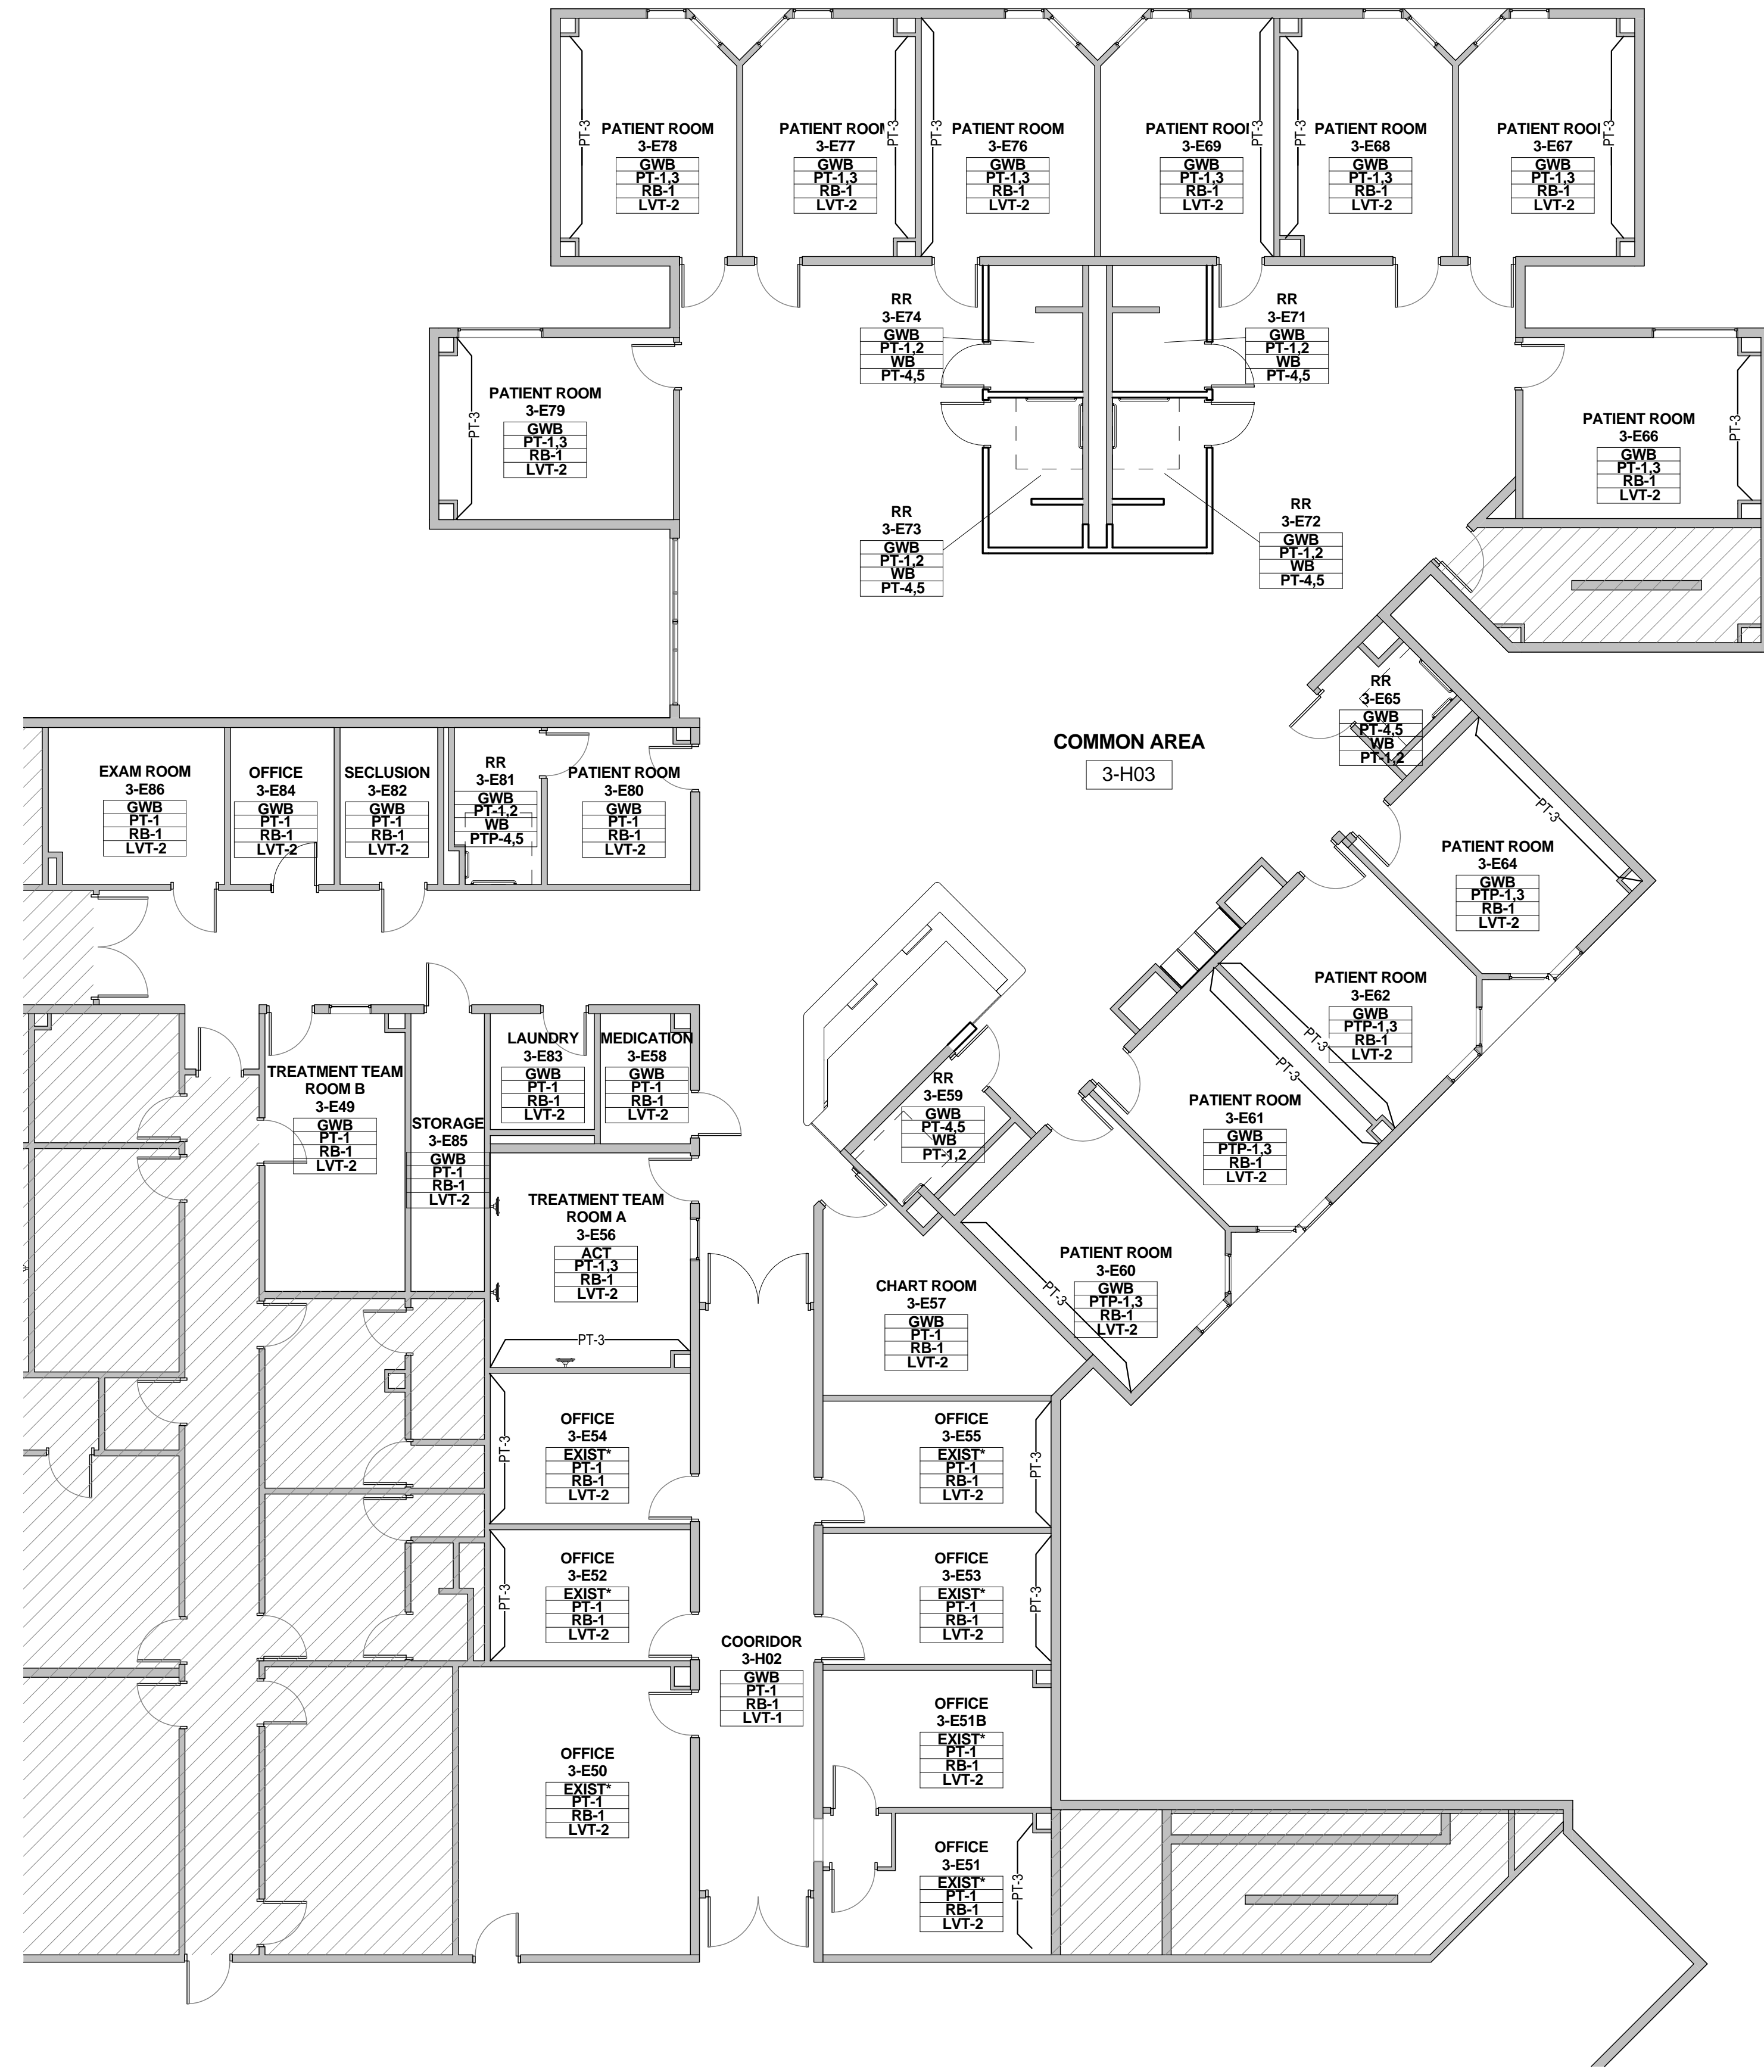

NOTE:
*PAINT EXISTING GYP BD WITH NEW PAINT COAT PT-1

GENERAL NOTES

1. VERIFY DIMENSIONS AND EXISTING CONDITIONS BEFORE COMMENCING WORK. REPORT DISCREPANCIES TO THE ARCHITECT PRIOR TO PROCEEDING WITH AFFECTED WORK.
2. REFLECTING CEILING PLAN DIMENSIONS ARE REFERENCED FROM FINISHED SURFACES UNLESS NOTED OTHERWISE. CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR TO FINISHED CEILING HEIGHT.
3. DIMENSIONS NOTED AS "FIELD VERIFY" SHALL BE CHECKED AT THE SITE BY THE CONTRACTOR AND REVIEWED WITH THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.
4. DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE. IF CLARIFICATION IS REQUIRED IN ORDER TO DETERMINE THE INTENT OF THE CONTRACT DOCUMENTS, CONTACT THE ARCHITECT.
5. NOTES OR DIMENSIONS LABELED "TYPICAL" SHALL APPLY TO SITUATIONS THAT ARE THE SAME OR SIMILAR.
6. ALL INTERIOR PARTITIONS SHALL BE KEYS AS REFERENCE SHEET A7.00 FOR PARTITION TYPES.
7. ALL DIMENSIONS ARE TO FACE OF FINISHED WALL UNLESS NOTED OTHERWISE.
8. ALL SPACES WITH FLOOR DRAINS TO HAVE FINISHED FLOORS SLOPED TO DRAIN NOT TO EXCEED ONE IN FIFTY.
9. ALL FLOOR FINISH CHANGES SHALL OCCUR AT THE CENTERLINE OF DOORS UNLESS NOTED OTHERWISE. ALL FLOOR FINISH CHANGES SHALL HAVE THRESHOLDS OR REDUCER STRIPS.
10. ALL DOORS IN INTERIOR GYP. BD STUD WALLS SHALL BE SET 4" OFF THE PERP. ADJ. WALL ON THE HINGE SIDE OF THE DOOR UNLESS NOTED OTHERWISE. THE CONTRACTOR SHALL CONTACT THE ARCHITECT IF ANY CONFLICT OCCURS.
11. PROVIDE VINYL REDUCERS AT ALL DISSIMILAR FLOOR MATERIALS UNLESS OTHERWISE NOTED.
12. UNLESS OTHERWISE NOTED, ALL ELECTRICAL AND MECHANICAL OPERABLE DEVICES SHALL BE MOUNTED WITH THE HIGHEST OPERABLE CONTROL AT 42" AFF.
13. ALL REQUIRED CLEARANCES, AS DESCRIBED IN THE TEXAS ACCESSIBILITY STANDARDS (TAS) OF THE ARCHITECTURAL BARRIERS ACT (LEI) 9102, TEXAS CIVIL STATUTES (2012) FOR COUNTERTOPS, ALL PLUMBING FIXTURES INCLUDING DRINKING FOUNTAINS, LAVATORIES, URINALS, AND TOILETS WILL BE STRICTLY ENFORCED.

DEMOLITION - KEYED NOTES


- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 TYPICAL: REMOVE EXISTING MILLWORK AND/OR TRASH UNIT AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD.
 - 02 REMOVE ALL EXISTING FLOORING, WALL FINISHES, FIXTURES AND ACCESSORIES; REFER TO MEP DRAWINGS FOR ADDITIONAL INFO PERTAINING TO FIXTURES; PREP EXISTING SUBSTRATES TO REMAIN FOR RECEIPT OF NEW FINISHES
 - 03 REMOVE EXISTING DOOR AND FRAME, SALVAGE DOORS AND RETURN TO BUILDING STOCK; RE: RENOVATION PLAN
 - 04 TYPICAL: REMOVE ALL WALL-MOUNTED ACCESSORIES (IE, BULLETIN BOARDS, SIGNAGE, ETC.) AND STORE FOR REINSTALLATION; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 05 REMOVE EXISTING VINYL OR TILE FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER.
 - 06 DEMOLISH EXISTING NURSE STATION
 - 07 DEMOLISH EXISTING WALLS WHERE INDICATED DASHED; COORDINATE EXACT REQUIREMENTS IN FIELD
 - 08 EXISTING CHASE WALL TO REMAIN; REMOVE FINISHES ONLY
 - 09 REMOVE EXISTING NOURISHMENT STATION DOORS; NOURISHMENT STATION TO REMAIN; PROTECT IN PLACE
 - 10 EXISTING TELEPHONE BANK/MILLWORK TO REMAIN; PROTECT IN PLACE
 - 11 COORDINATE WITH OWNER TEMPORARY REMOVAL OF EXISTING SIGNAGE, WALL-MOUNTED ACCESSORIES AND WALL-MOUNTED DEVICES TO PREPARE FOR APPLICATION OF NEW WALL FINISHES, TYPICAL THROUGHOUT
 - 12 REMOVE EXISTING FLOORING ONLY
 - 13 ALTERNATE NO.
 - 14 EXISTING FLOORING AND WALL BASE TO REMAIN
 - 15 REMOVE EXISTING FLOORING AND WALL BASE; PREP EXISTING SUBSTRATE FOR RECEIPT OF NEW FINISHES; RE: FINISH PLANS; COORDINATE TEMPORARY REMOVAL OF ANY FURNITURE AND EQUIPMENT WITH OWNER
 - 16 ALTERNATE NO.

RENOVATION - KEYED NOTES


- NOTE: REFER TO ENLARGED PLANS FOR ADDITIONAL KEYED NOTE LOCATIONS IF NOT VISIBLE ON THIS SHEET.
- 01 INSTALL SCHEDULED FLOORING & BASE; RE: FINISH PLAN
 - 02 APPLY SCHEDULED WALL FINISH THROUGHOUT; RE: FINISH PLAN
 - 03 REINSTALL EXISTING MILLWORK, WALL-MOUNTED DEVICES, AND EQUIPMENT AS NEEDED; COORDINATE WITH OWNER IN FIELD
 - 04 INSTALL NEW CEILING, WALL FINISHES, PLUMBING FIXTURES AND FLOORING FINISHES
 - 05 RE-PAINT ALL EXISTING WALLS WITHIN THIS AREA WITH PT-1; EXISTING FLOORING IS ALSO TO BE REMOVED AS PART OF BASE SCOPE OF WORK; FLOORING REPLACEMENT AND WALL PAINTING SHALL BOTH OCCUR OVER THE COURSE OF ONE WEEKEND (FRIDAY THROUGH SUNDAY); COORDINATE REMOVAL AND REINSTALLATION OF ANY FURNITURE, FIXTURES, AND EQUIPMENT ITEMS IN FIELD WITH OWNER.
 - 06 IN LIEU OF TYPICAL WALL PAINT, APPLY CHALKBOARD PAINT TO EXISTING WALL OPPOSITE FROM PATIENT BEDS IN THE ROOM (CONFIRM IN FIELD); CHALKBOARD PAINT IS TO EXTEND FROM EXISTING DESK HEIGHT TO ALIGN WITH THE TOP OF THE EXISTING DOOR FRAME AND FOR THE FULL LENGTH OF THE WALL
 - 07 ALTERNATE NO.
 - 08 ALTERNATE NO.
 - 09 REMOVE THE EXISTING NURSE STATION AND REPLACE WITH A NEW NURSE STATION TO MATCH THE CONFIGURATION AND FINISHES AS BUILT IN UNITS 1D AND 2B WITH EXCEPTIONS AS NOTED AND DEPICED IN DETAILS WITHIN MODIFY EXISTING CORING WITHIN THE FLOOR SLAB AS NEEDED TO ACCOMMODATE THE NEW NURSE STATION CONFIGURATION; EXISTING CEILING IS TO REMAIN IN THIS AREA. NO FURR-DOWNS ARE TO BE INSTALLED ABOVE THE NEW NURSE STATION
 - 10 ALTERNATE NO.
 - 11 RE: INTERIOR ELEVATIONS FOR EXISTING NOURISHMENT STATION MODIFICATIONS
 - 12 ALTERNATE NO.

GENERAL DEMOLITION NOTES:


1. THE DEMOLITION PLAN OUTLINES SOME OF THE SCOPE OF THE WORK INVOLVED FOR THE DEMOLITION PHASE OF THIS PROJECT. CONTRACTOR SHALL REVIEW ALL SHEETS FOR ADDITIONAL DEMO SCOPE.
2. CONTRACTOR SHALL VERIFY EXISTING SITE AND BUILDING CONDITIONS AND DIMENSIONS IN THE FIELD PRIOR TO COMMENCING DEMOLITION ACTIVITIES. CONTRACTOR SHALL NOT SCALE DRAWINGS. CONTRACTOR WILL NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING.
3. AFTER AWARD OF THE CONTRACT, CHANGE ORDER REQUESTS FOR ADDITIONAL MONEY WILL NOT BE APPROVED IF THE WORK COULD HAVE BEEN ANTICIPATED DURING A SITE VISIT BY THE CONTRACTOR.
4. CONTRACTOR WILL BE REQUIRED TO REPAIR, REPLACE, OR PATCH EXISTING BUILDINGS, DRIVEWAYS, SIDEWALKS, CANOPIES, AND/OR PARKING AREAS DISTURBED BY DEMOLITION.
5. CONTRACTOR WILL BE REQUIRED TO REGRADE AND HYDROMULCH AREAS AFFECTED BY DEMOLITION.
6. ALL FURNITURE WILL BE REMOVED OR RELOCATED BY THE OWNER AS NECESSARY PRIOR TO THE DEMOLITION WORK OF THIS PROJECT. CONTRACTOR SHALL COORDINATE WITH OWNER AS REQUIRED.
7. REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION TO REMAIN, THE CONTRACTOR SHALL REPAIR THE DAMAGE TO MATCH EXISTING ADJACENT CONSTRUCTION.
8. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION ACTIVITIES.
9. CONTRACTOR SHALL REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE WITH ROADS, STREET, WALKS, AND ALL OTHER ADJACENT FACILITIES.
10. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF TEMPORARY DUST AND/OR SOUND PARTITIONS BETWEEN CONSTRUCTION AREA AND AREAS NOT IN SCOPE AS NECESSARY. DEMOLITION ACTIVITIES SHALL BE PERFORMED SO AS TO PRODUCE MINIMAL DISTURBANCE TO EXISTING FACILITY AND OCCUPANTS (I.E. MINIMIZE EXCESSIVE AND PROLONGED NOISE LEVELS AND DUST).
11. NOTIFY THE BUILDING OWNER OF ANY MATERIALS, FIXTURES, ETC. TO BE REMOVED THAT ARE DEEMED SALVAGEABLE. TURN OVER ANY REQUESTED ITEMS TO THE BUILDING OWNER IN GOOD CONDITION.
12. THE CONTRACTOR SHALL REMOVE ALL TRASH AND DEBRIS FROM THE SITE ON A DAILY BASIS.
13. MAINTAIN THE INTEGRITY OF ALL EXISTING RATED WALLS, FIRE SEAL ANY PENETRATIONS WITH U.L. APPROVED ASSEMBLY.
14. WHEN UNANTICIPATED MECHANICAL, ELECTRICAL, OR STRUCTURAL ELEMENTS THAT CONFLICT WITH THE INTENDED FUNCTION OR DESIGN ARE ENCOUNTERED, DETERMINE THE NATURE AND EXTENT OF THE CONFLICT AND NOTIFY THE ARCHITECT IMMEDIATELY FOR RESOLUTION.
15. CONTRACTOR SHALL PROVIDE TRAFFIC HANDLING MEASURES AS NECESSARY TO PROTECT THE GENERAL PUBLIC AT ALL TIMES, AND AS REQUIRED BY GOVERNING AUTHORITIES.
16. DO NOT INTERRUPT EXISTING UTILITIES, EXCEPT WHEN AUTHORIZED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES, AS ACCEPTABLE TO GOVERNING AUTHORITIES.
17. WHEN UTILITY SERVICES ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, PROVIDE BYPASS CONNECTIONS TO MAINTAIN CONTINUITY OF SERVICE BEFORE PROCEEDING WITH DEMOLITION.
18. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR SHALL IDENTIFY ALL ELECTRICAL CIRCUITS SERVICING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS SHALL THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING SHALL BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.
19. CONTRACTOR TO RE-LOCATE UTILITIES & EQUIPMENT AS REQUIRED TO ACCOMMODATE NEW PLUMBING REQUIREMENTS FOR NEW RENOVATION WORK.
20. REFER TO DEMOLITION DRAWINGS FOR EXISTING PLUMBING & ELECTRICAL TO BE REMOVED AND REPLACED FOR UNDER FLOOR PIPING INSTALLATION.
21. EXISTING WALLS OR PORTIONS OF WALLS TO BE REMOVED SHALL BE CUT FLUSH WHERE INTERSECTING WITH WALLS TO REMAIN. REMAINING WALLS TO BE PATCHED AND FINISHED SMOOTH.
22. NEW OPENING TO BE CUT IN EXISTING WALLS SHALL BE SAW-CUT AT LOCATIONS INDICATED TO THE HEIGHT AND WIDTH INDICATED. NEW LINTELS SHALL BE INSTALLED TO SUPPORT EXISTING WALL CONSTRUCTION ABOVE AS INDICATED ON THE DRAWINGS, OR IF NOT INDICATED, AS REQUIRED FOR NEW WALL CONSTRUCTION PER STRUCTURAL DRAWINGS, IF PROVIDED.
23. WHERE EXISTING INTERIOR WALLS ARE REPLACED OR REMOVED, REMOVE MEP SYSTEMS BACK TO PANEL OR MECHANICAL ROOM OR FARTHEST POSSIBLE POINT WITHOUT DISTURBING EXISTING CONSTRUCTION. REMOVE EXISTING MECHANICAL EQUIPMENT, RELOCATE POWER PER MEP DRAWINGS.
24. REFER TO MEP DRAWINGS FOR DEMOLITION OF MEP SYSTEMS. IDENTIFY WORK REQUIRED BY THIS CONTRACTOR WHICH MAY AFFECT DEMOLITION AND/OR REPAIRS OF ARCHITECTURAL FINISHES. COORDINATE WITH RELATED SUBS THE EXTENT OF ALL DEMOLITION WORK.
25. PATCH FLOORS, WALLS, CEILINGS WHICH REMAIN AT LOCATIONS WHERE PIPES, CONDUITS, ETC. ARE REMOVED AS REQUIRED TO MATCH EXISTING CONDITIONS OR TO RECEIVE NEW FINISHES. WHERE EXISTING FINISH FLOOR IS REMOVED, PREPARE SURFACE TO RECEIVE NEW FLOORING.
26. NOTIFY ARCHITECT & OWNER OF ANY POSSIBLE ASBESTOS CONTAINING MATERIALS DISCOVERED BEFORE PROCEEDING WITH WORK, PROTECT INTERIOR CONSTRUCTION TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
27. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS BEFORE COMMENCING WORK.
28. CONTRACTOR TO PROVIDE ALL NECESSARY SHORING FOR PROTECTION OF EXISTING STRUCTURE AND FOUNDATION TO REMAIN.
29. ALL DASHED LINES ARE DEMOLITION LINES UNLESS NOTED OTHERWISE.
30. REMOVE ALL CARPET WAINSCOT FROM ALL LOCATIONS IN EACH UNIT.

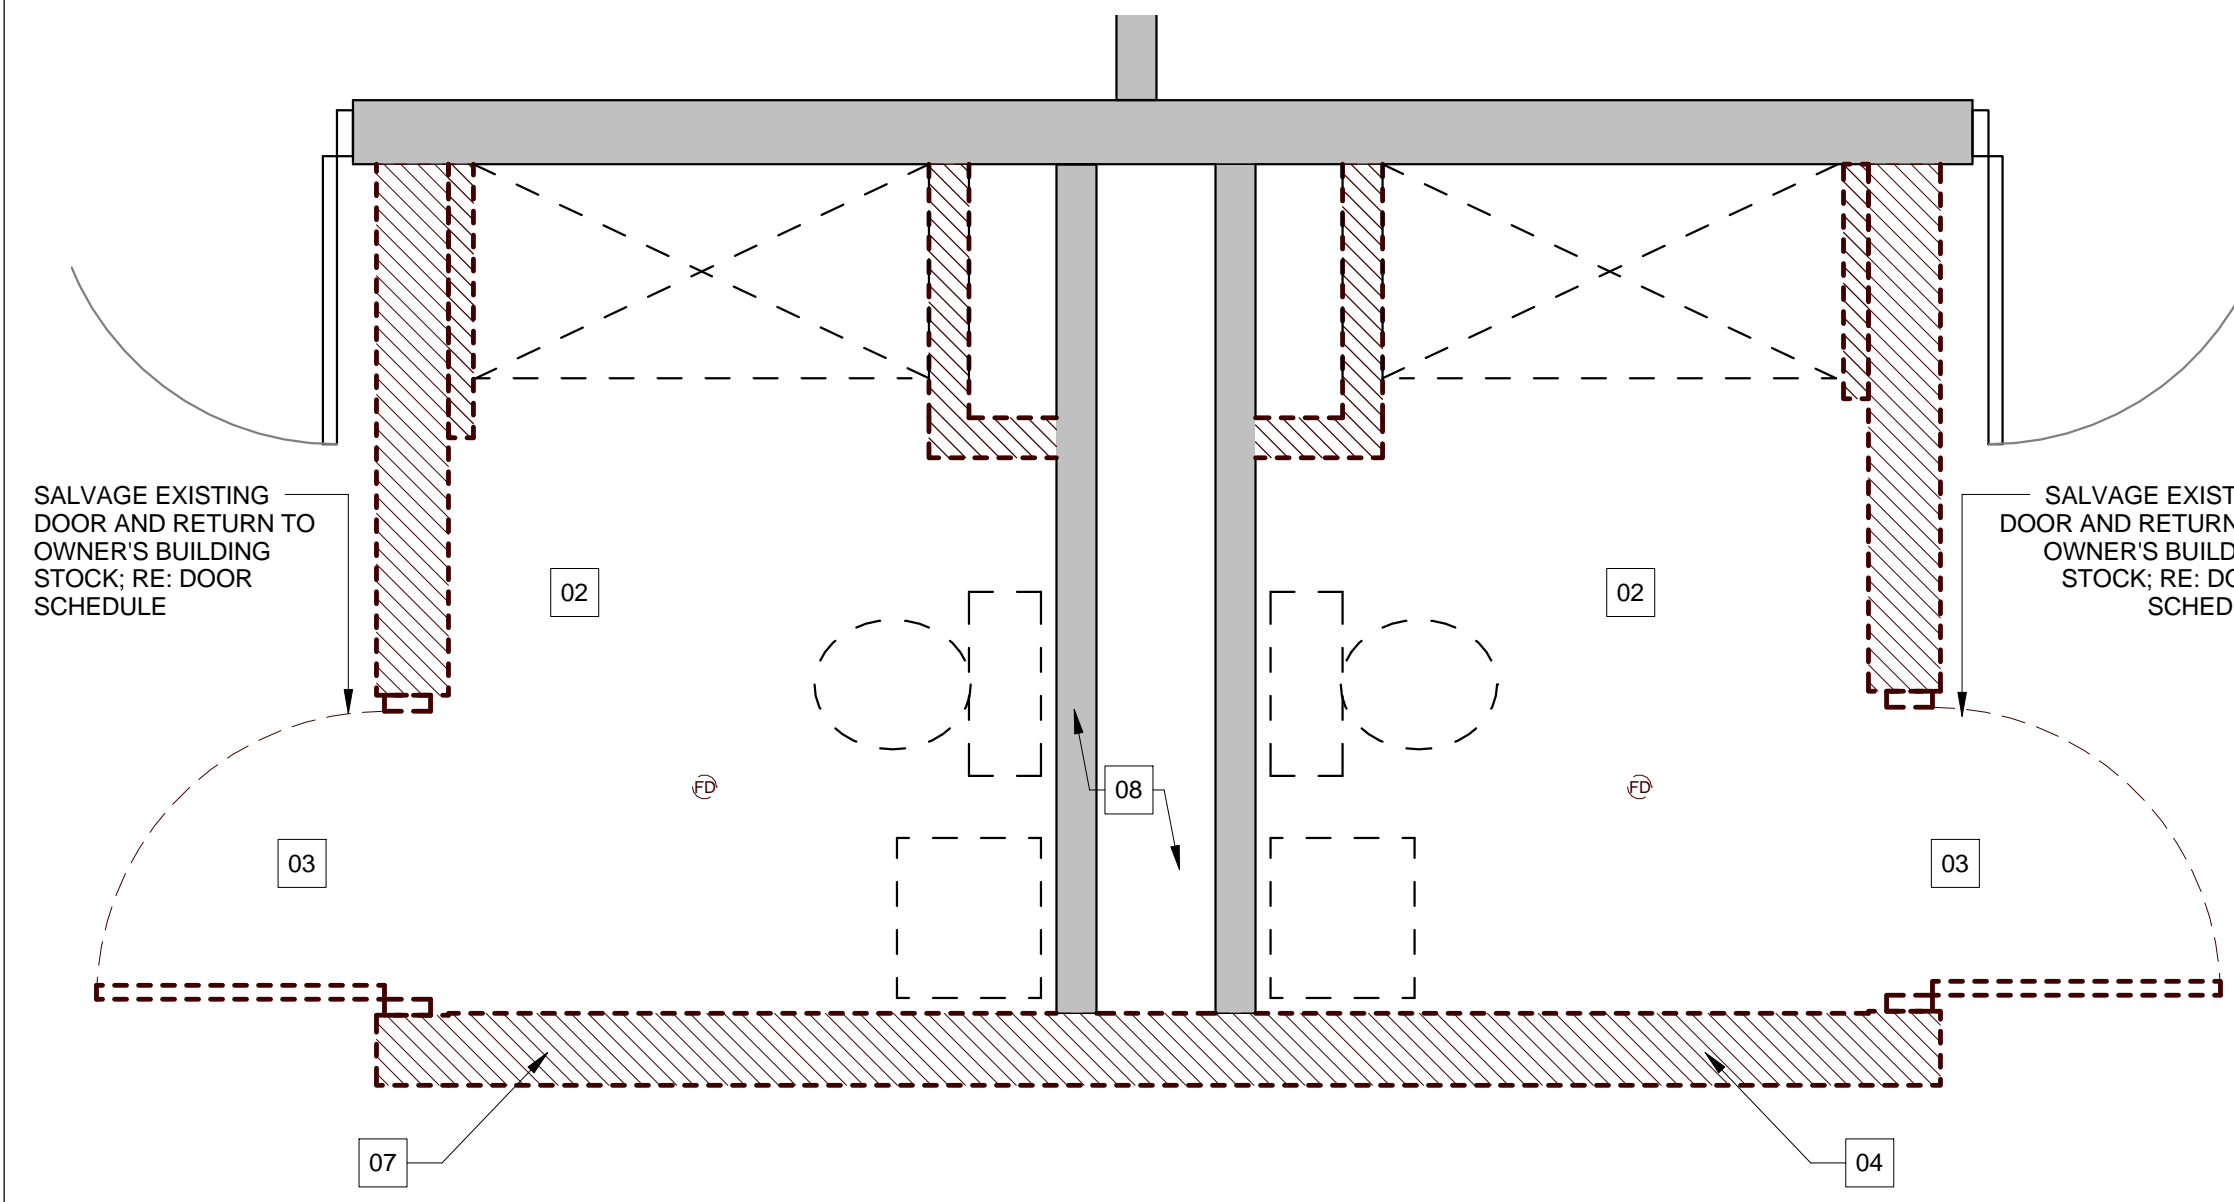


28 ENLARGED DEMOLITION RESTROOM PLAN - UNIT 3D
1/2" = 1'-0"

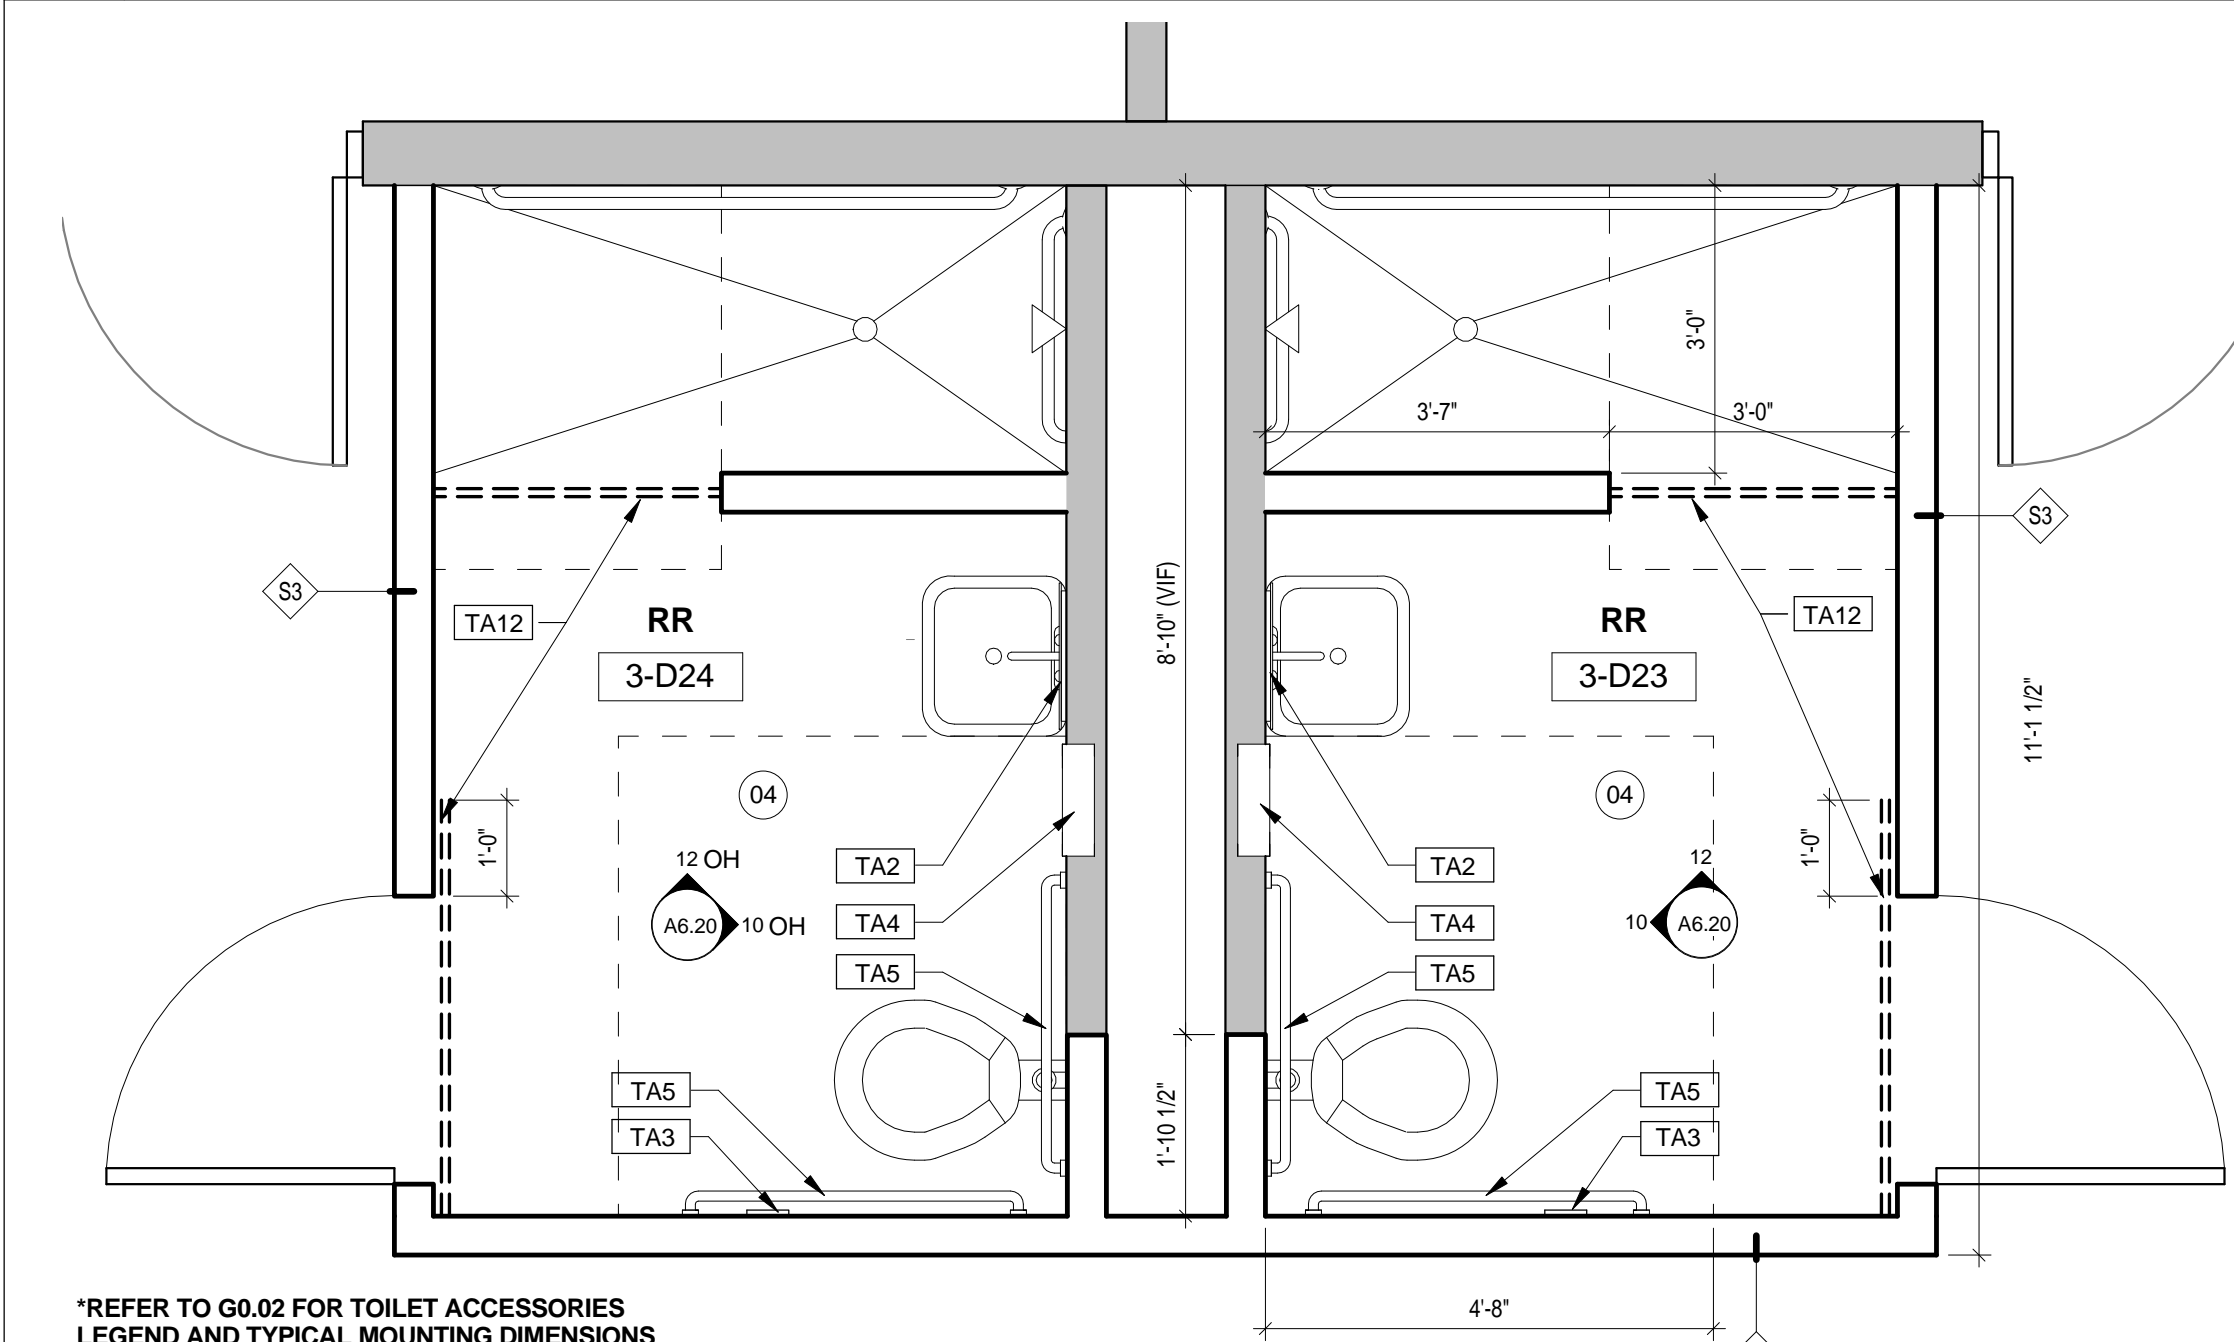


16 ENLARGED RENOVATION RESTROOM PLAN - UNIT 3D
1/2" = 1'-0"

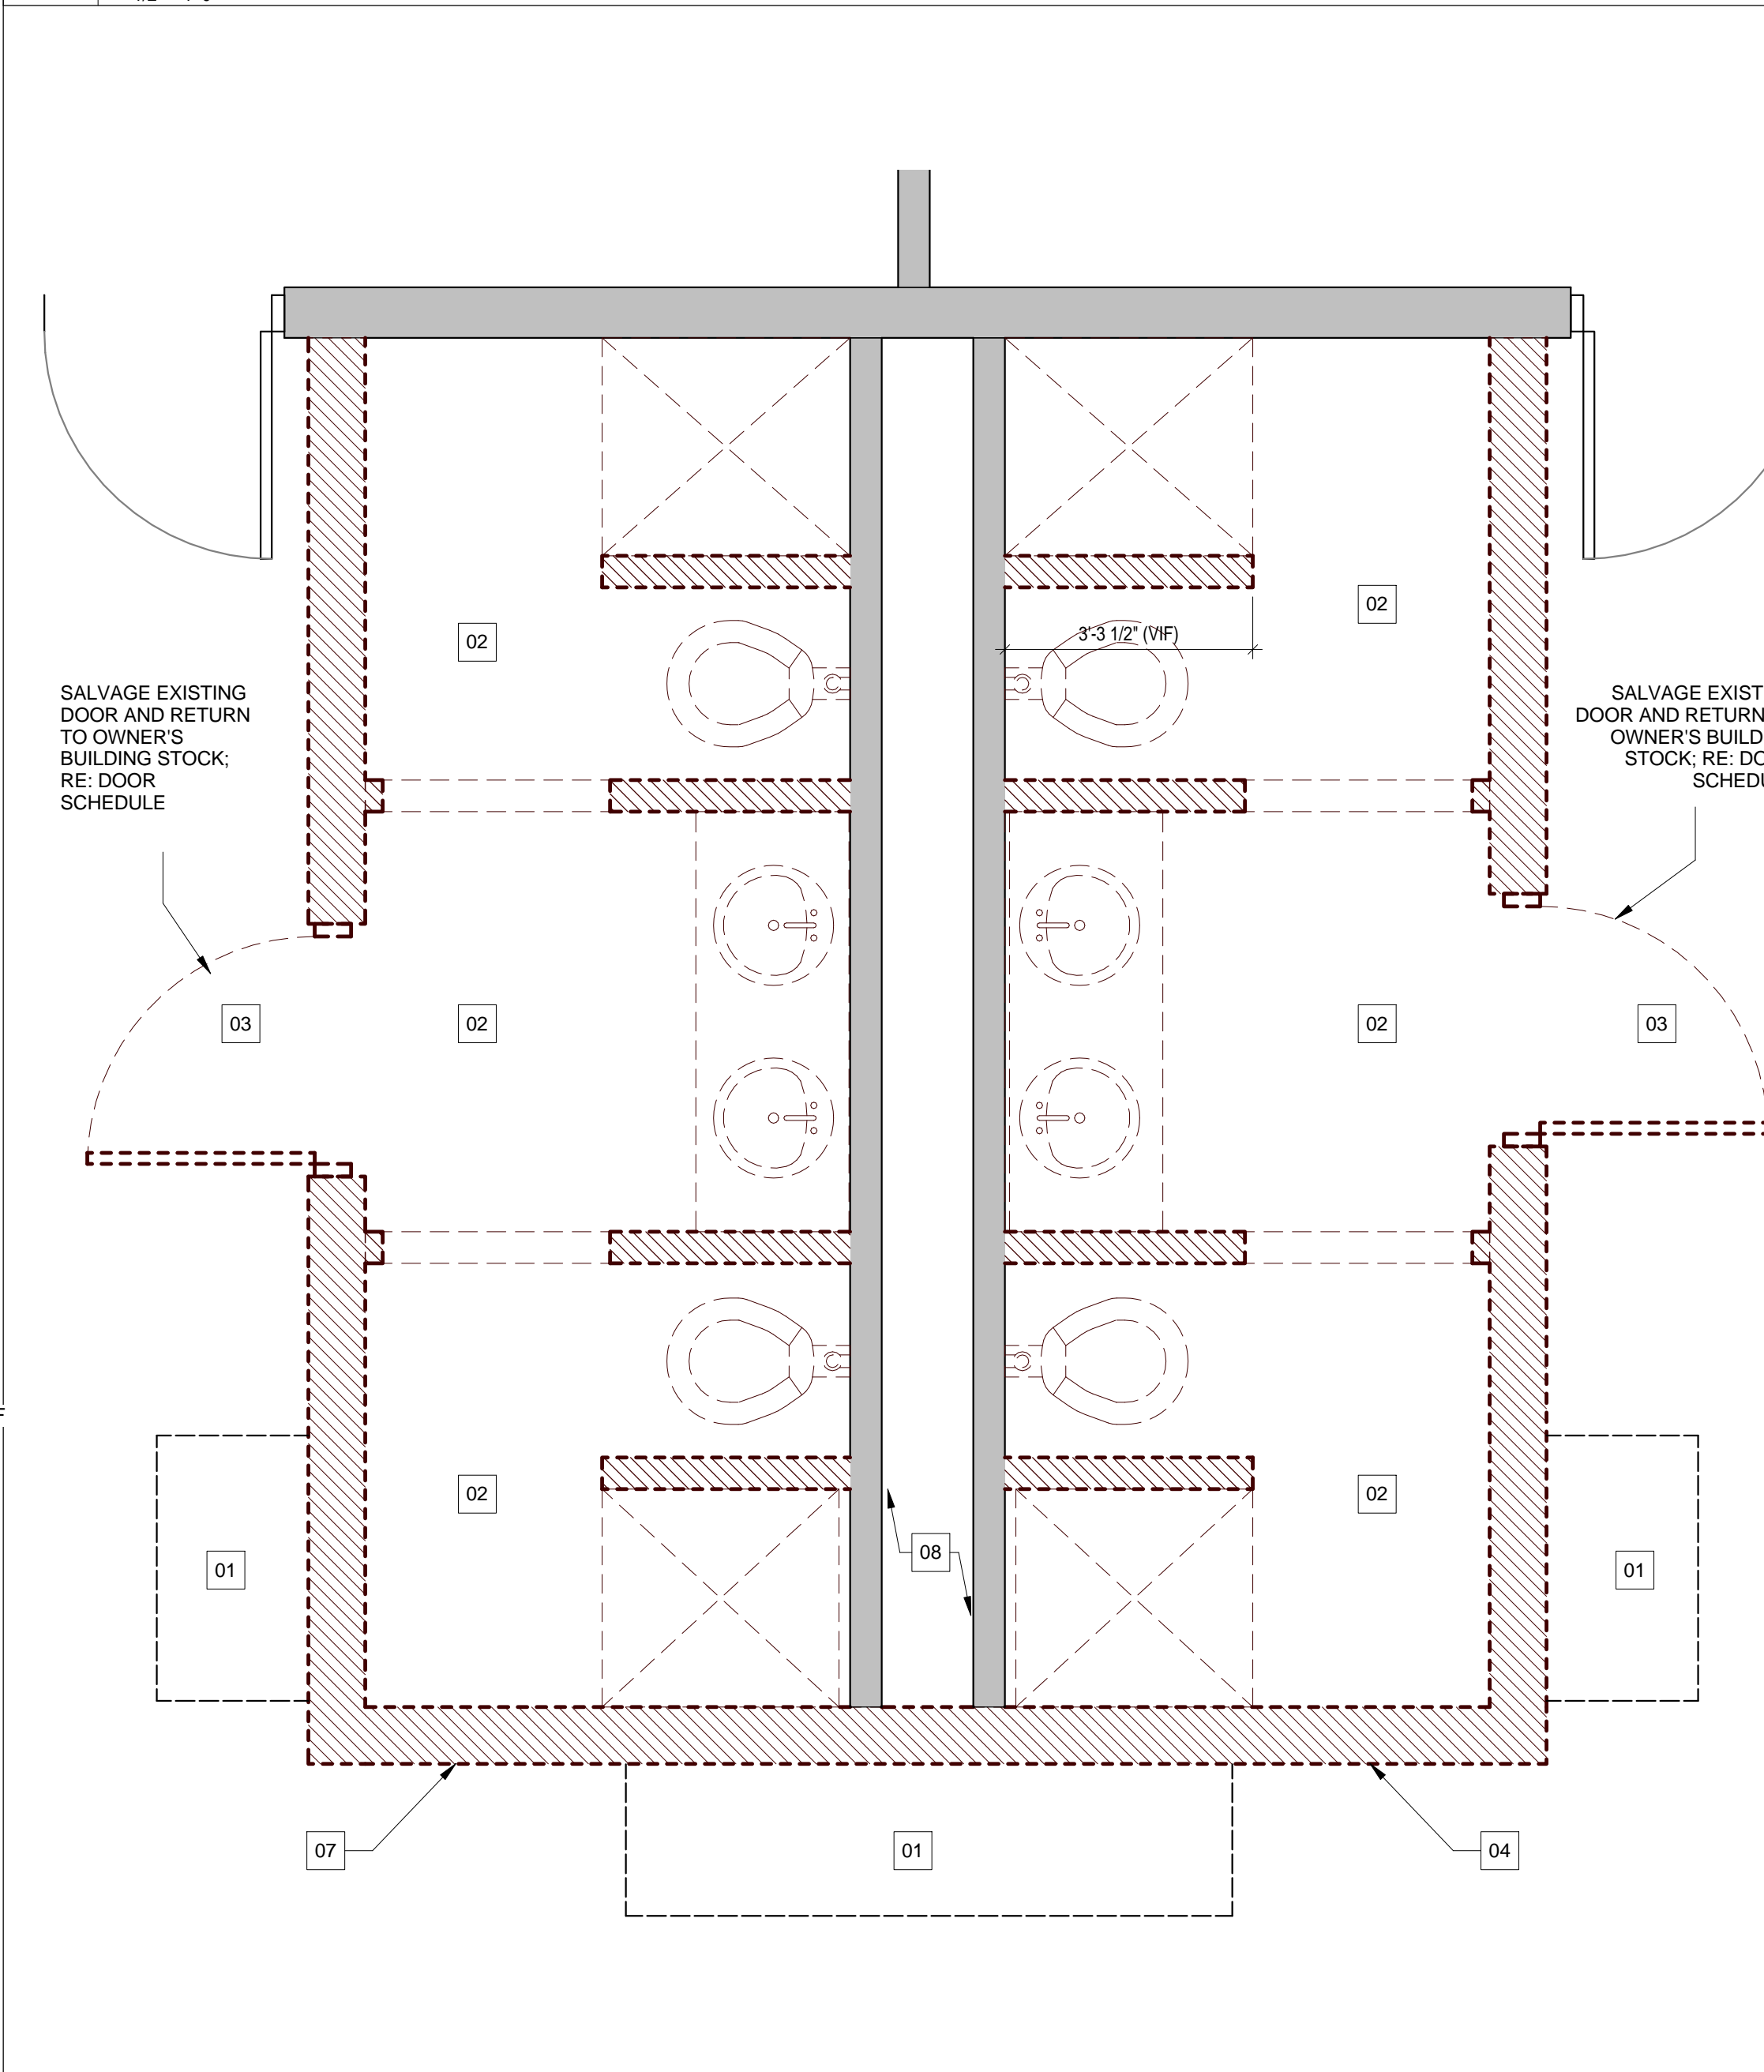

4 ENLARGED DEMOLITION RESTROOM PLAN - TYPICAL
1/2" = 1'-0"

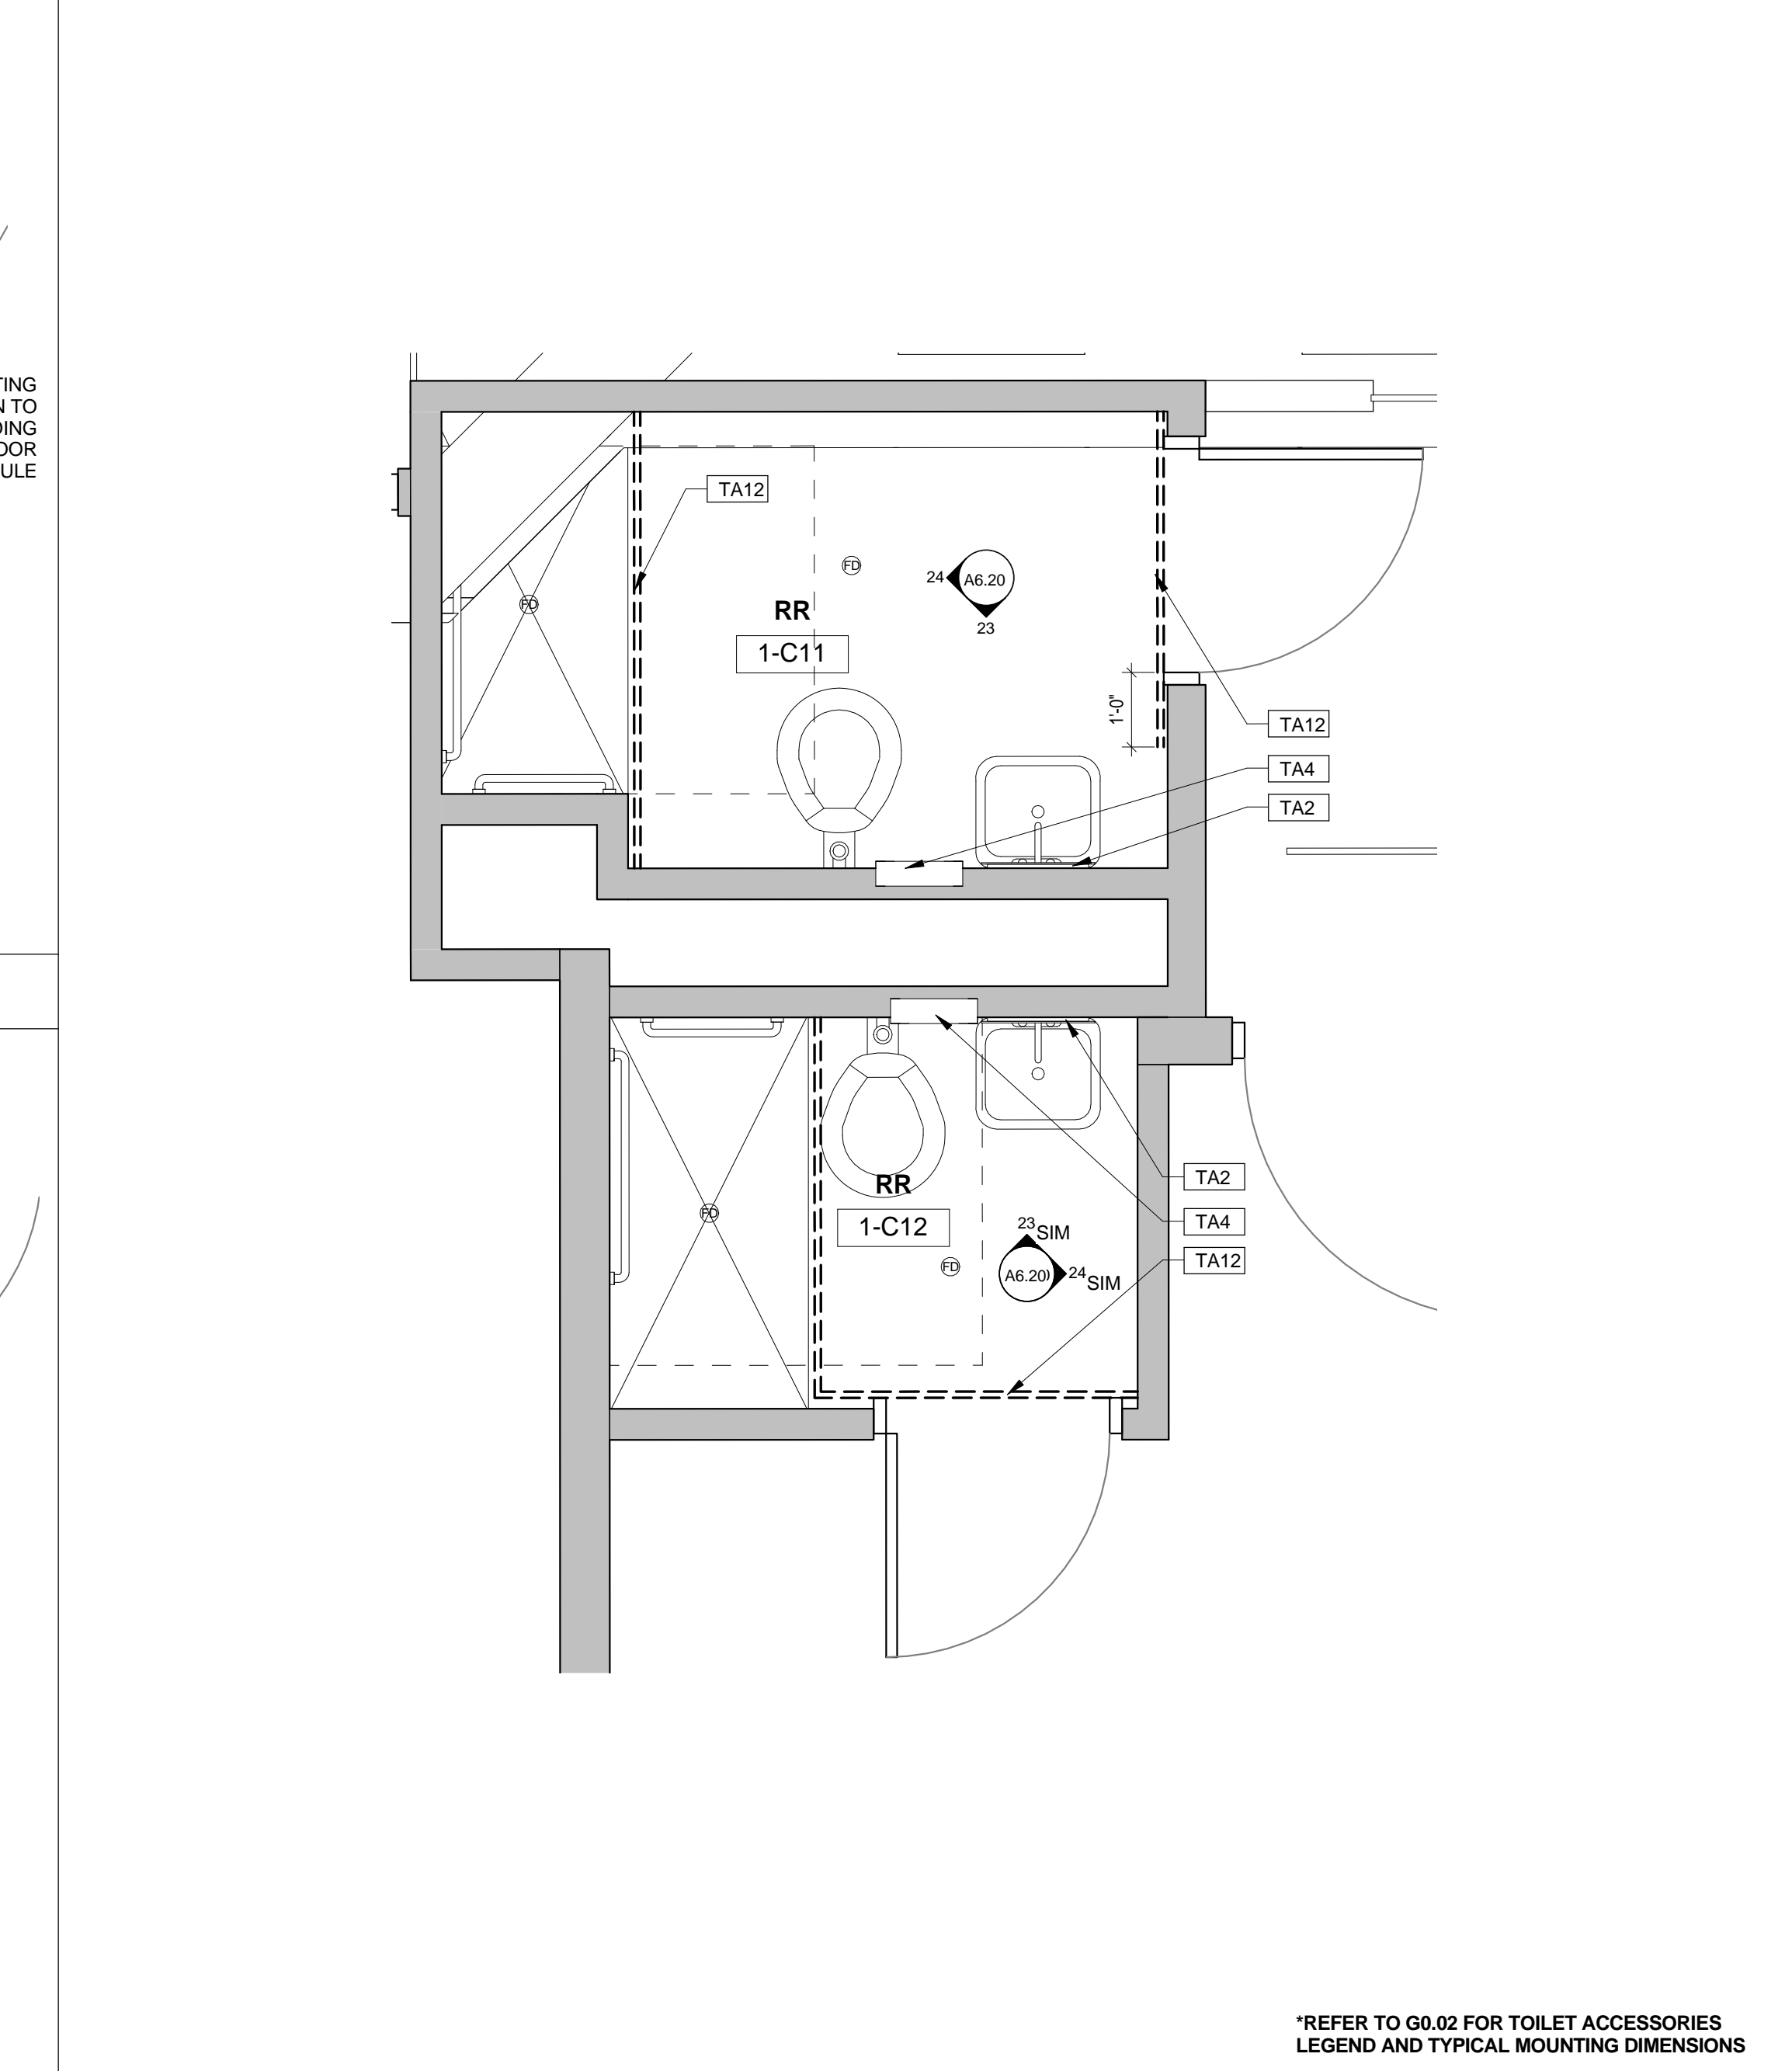

14 ENLARGED SINGLE/PRIVATE RESTROOMS - TYPICAL
1/2" = 1'-0"

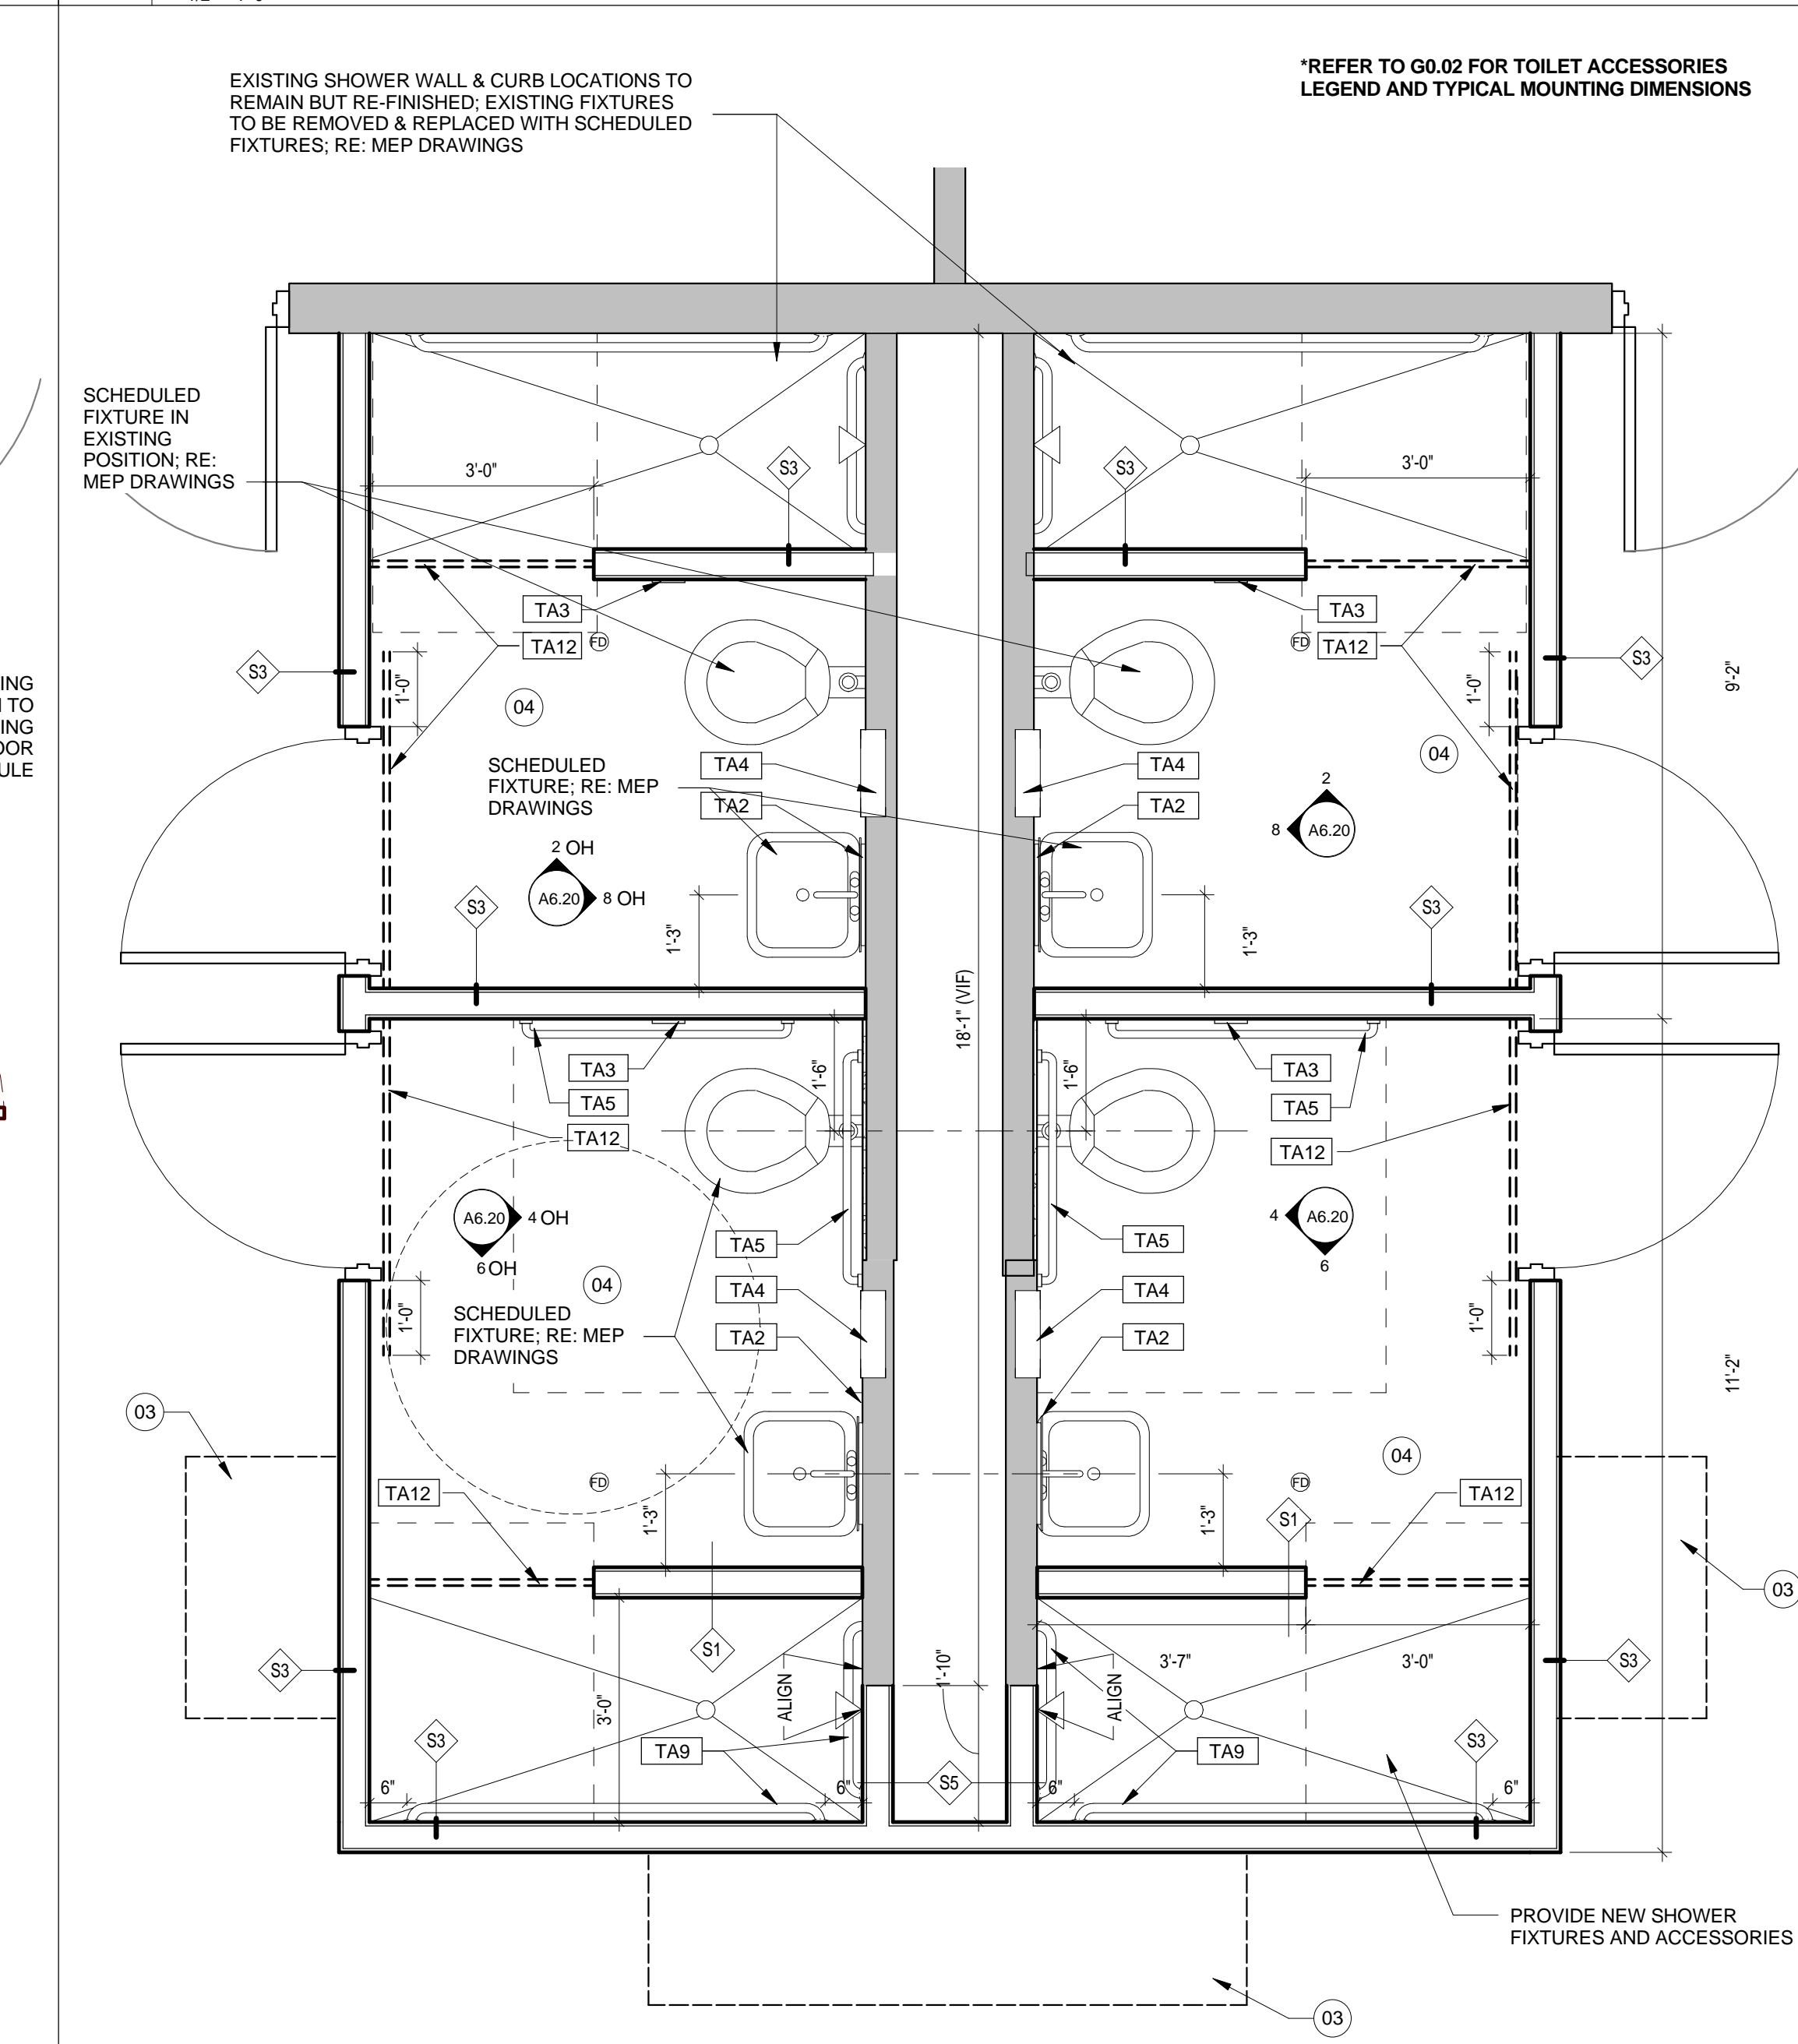



2 ENLARGED RENOVATION RESTROOM PLAN - TYPICAL
1/2" = 1'-0"



ARCHITECTURE
PBK ARCHITECTS
11 Greenway Plaza, 22nd Floor
Houston, TX 77046
713-963-0638 F
713-961-4511 F
TX Firm F-3709
PBK.com

MEP
SHAH SMITH AND ASSOCIATES
2825 S. Wilshire Dr. #300
HOUSTON, TX 77042
(713) 790-7963


**HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATION UNITS: 1C,
2E, 3B, 3C, 3D & 3E**

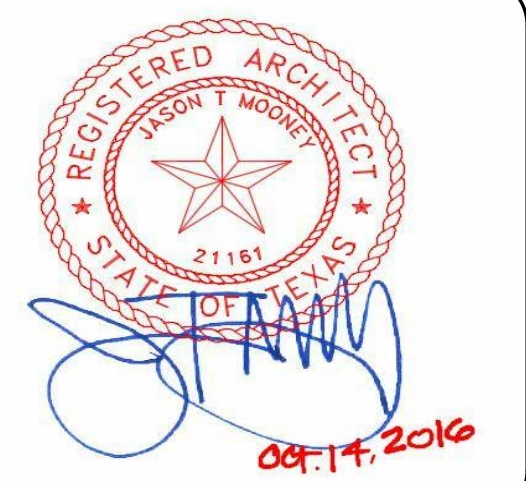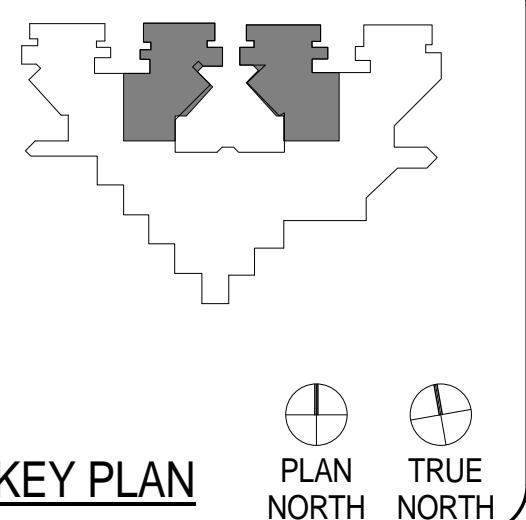


CLIENT UT HEALTH		
PROJECT NUMBER 16106		
DATE: OCTOBER 14, 2016		
DRAWN BY: VJ/BG		
CHECKED BY: JM/CJS		
REVISIONS		
No.	Description	Date

ISSUE FOR BID
ENLARGED PLANS

A4.01

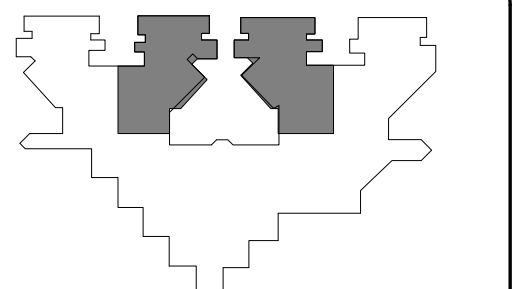

KEY PLAN PLAN NORTH TRUE NORTH

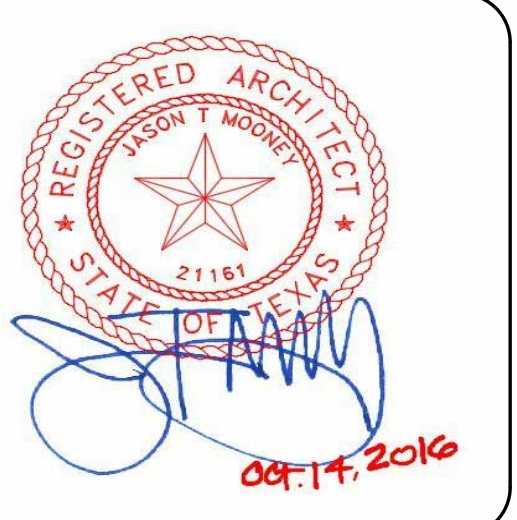


CLIENT	UT HEALTH
PROJECT NUMBER	16106
DATE	OCTOBER 14, 2016
DRAWN BY	VG/BG
CHECKED BY	JM/CS
REVISIONS	


No.	Description	Date

ISSUE FOR BID
**INTERIOR
 ELEVATIONS &
 ENLARGED PLANS**


NOTE: REFER TO SHEET G0.02 FOR TYPICAL MOUNTING HEIGHTS OF WALL MOUNTED FIXTURES

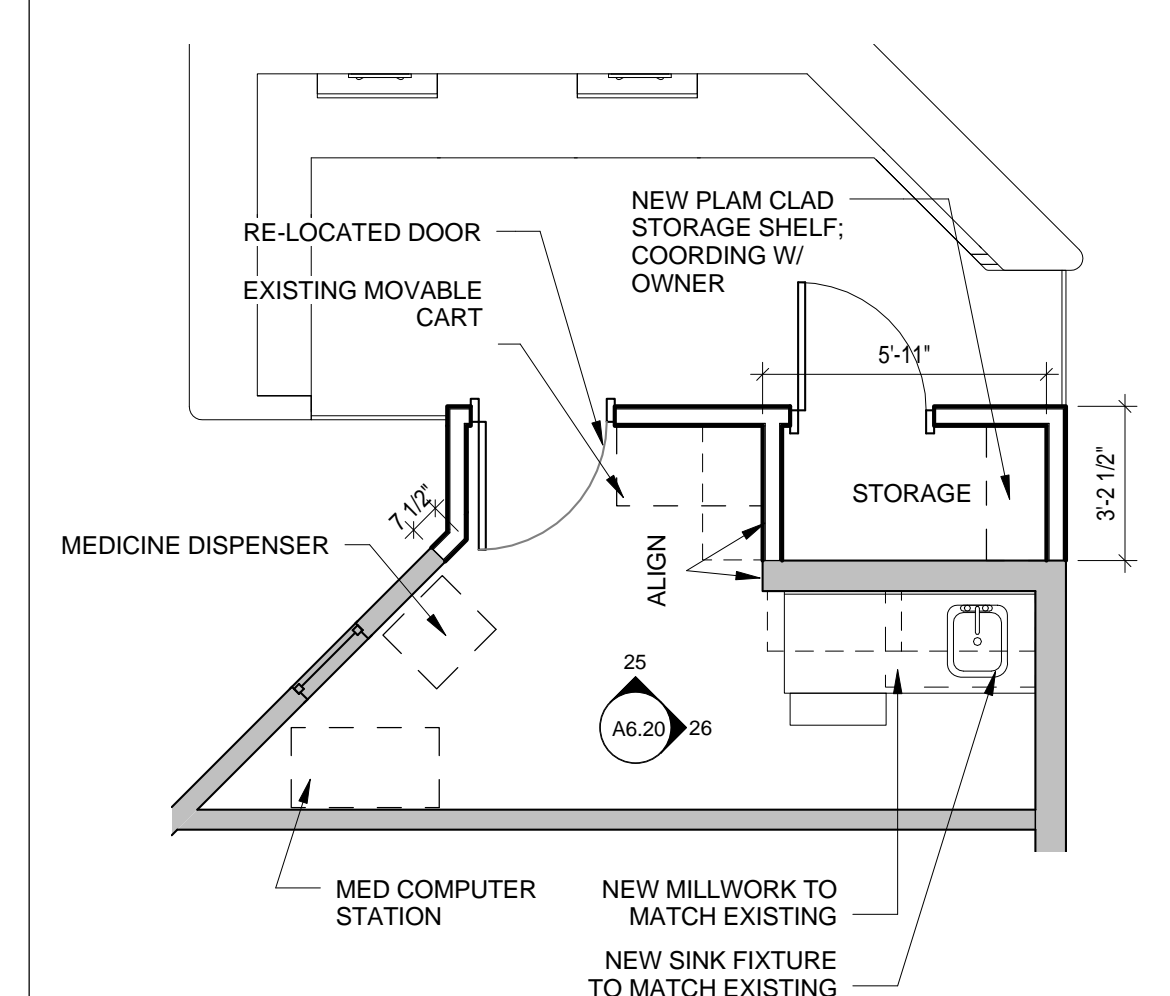


27 ENLARGED MEDICINE ROOM
 1/4" = 1'-0"

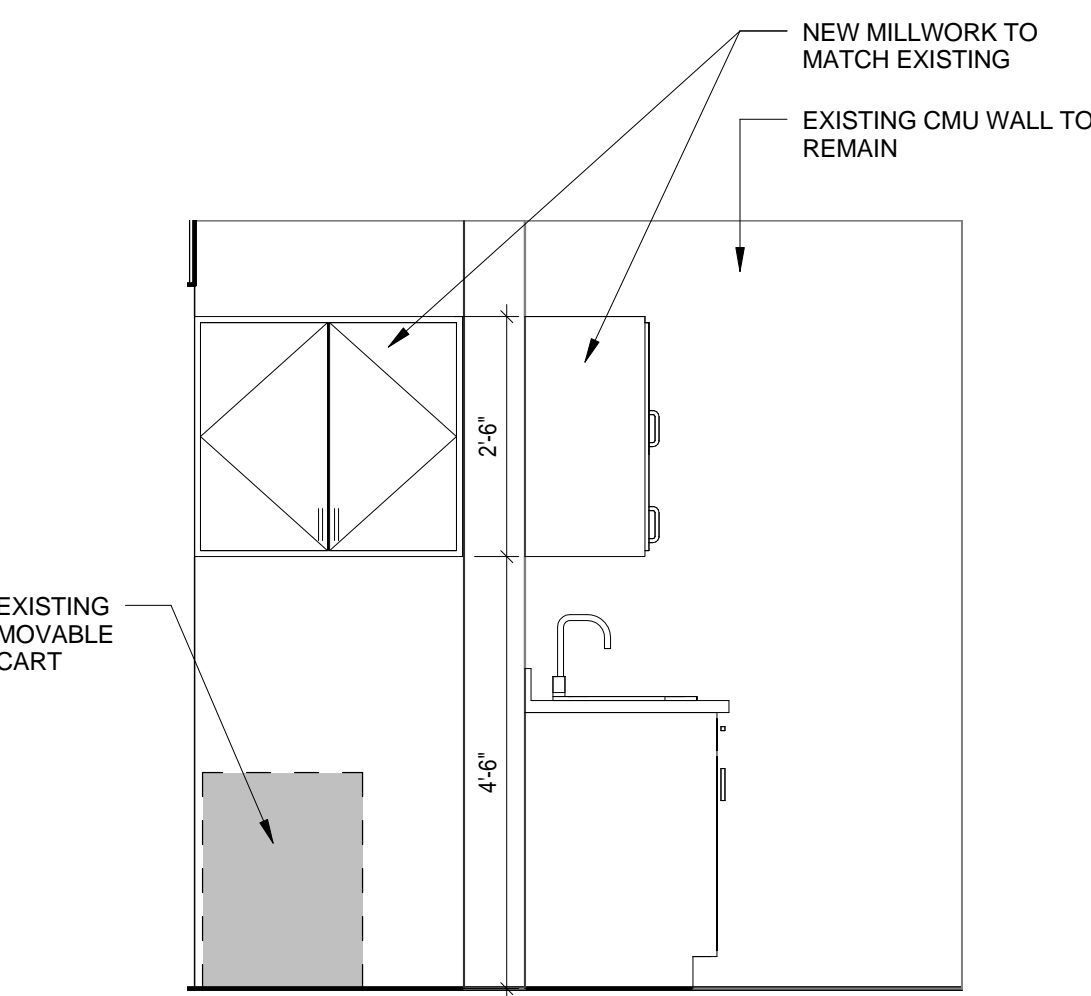


26 MEDICINE ROOM ELEVATION
 1/2" = 1'-0"

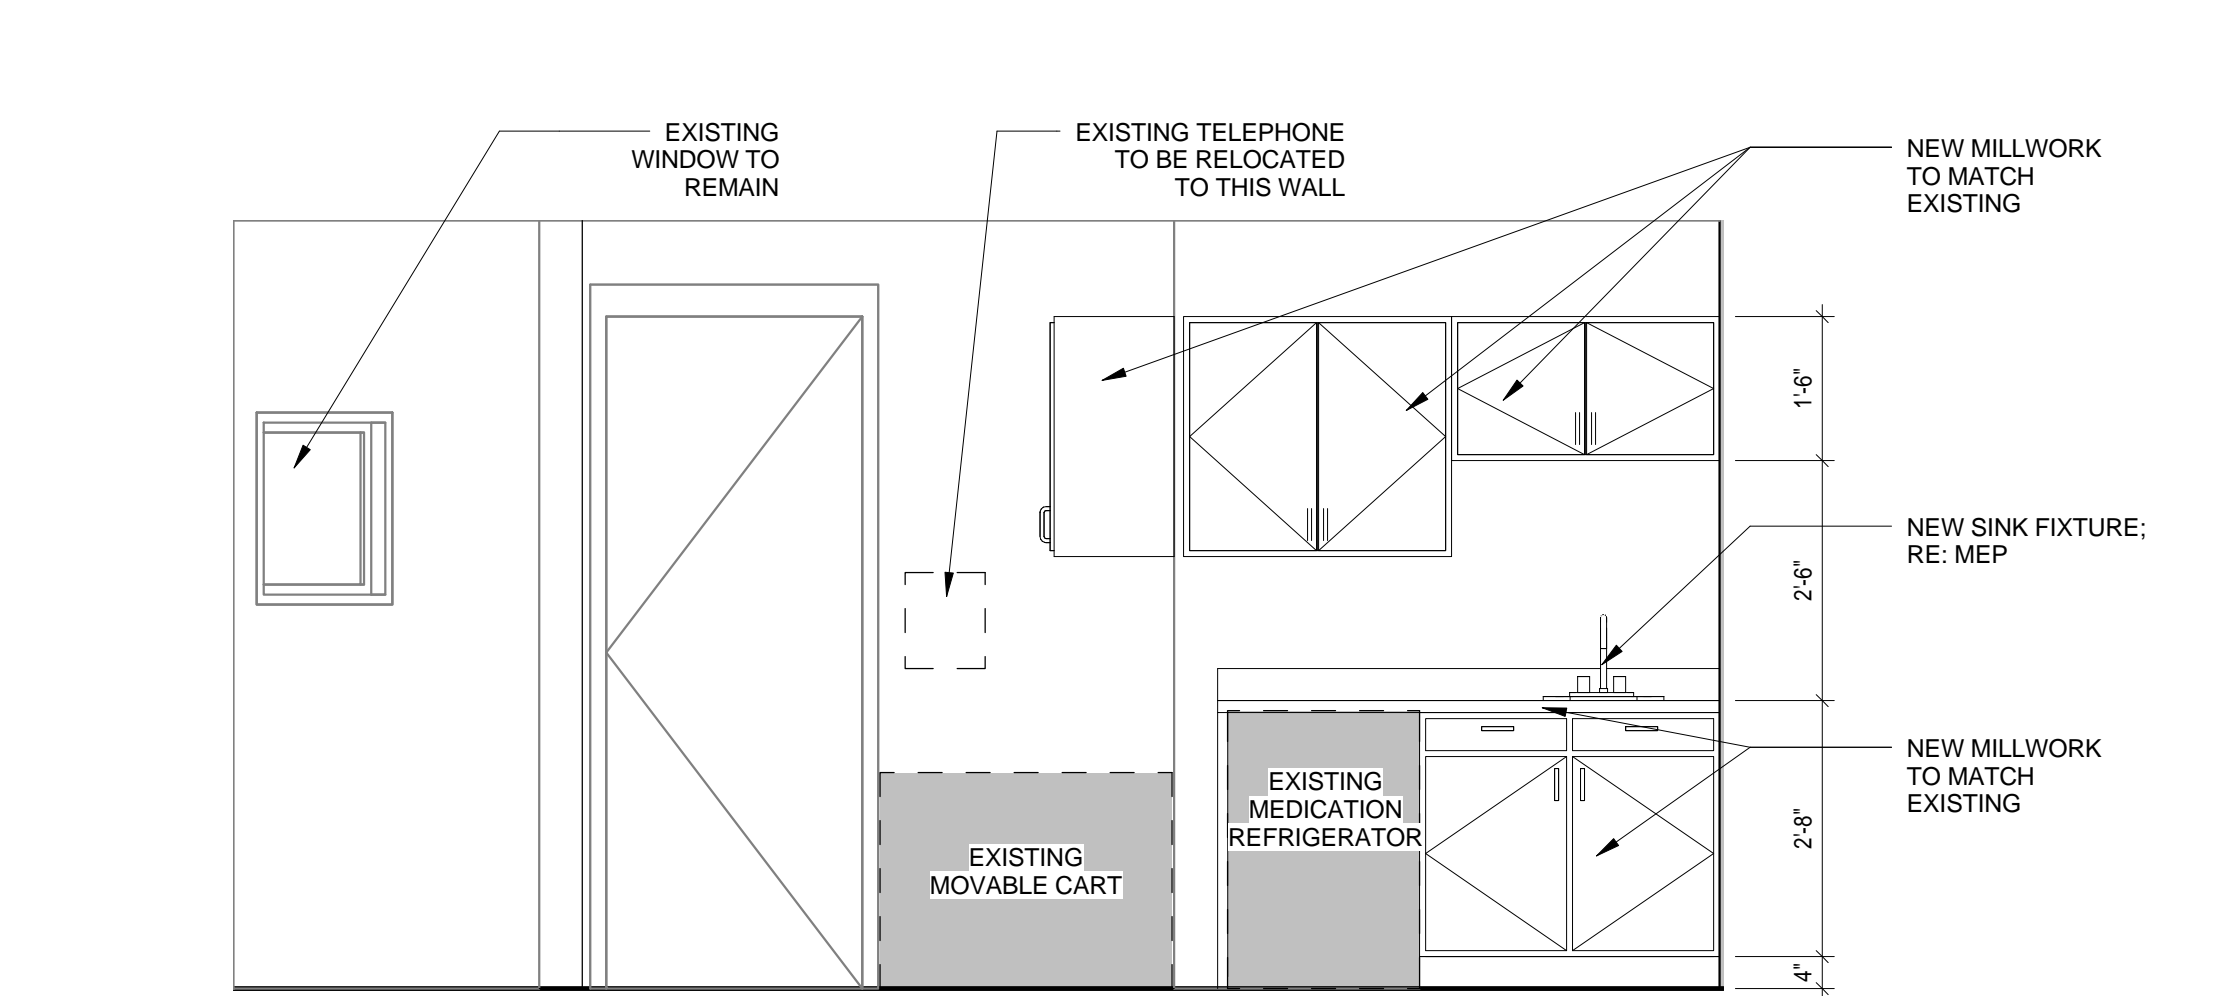


25 MEDICINE ROOM ELEVATION
 1/2" = 1'-0"

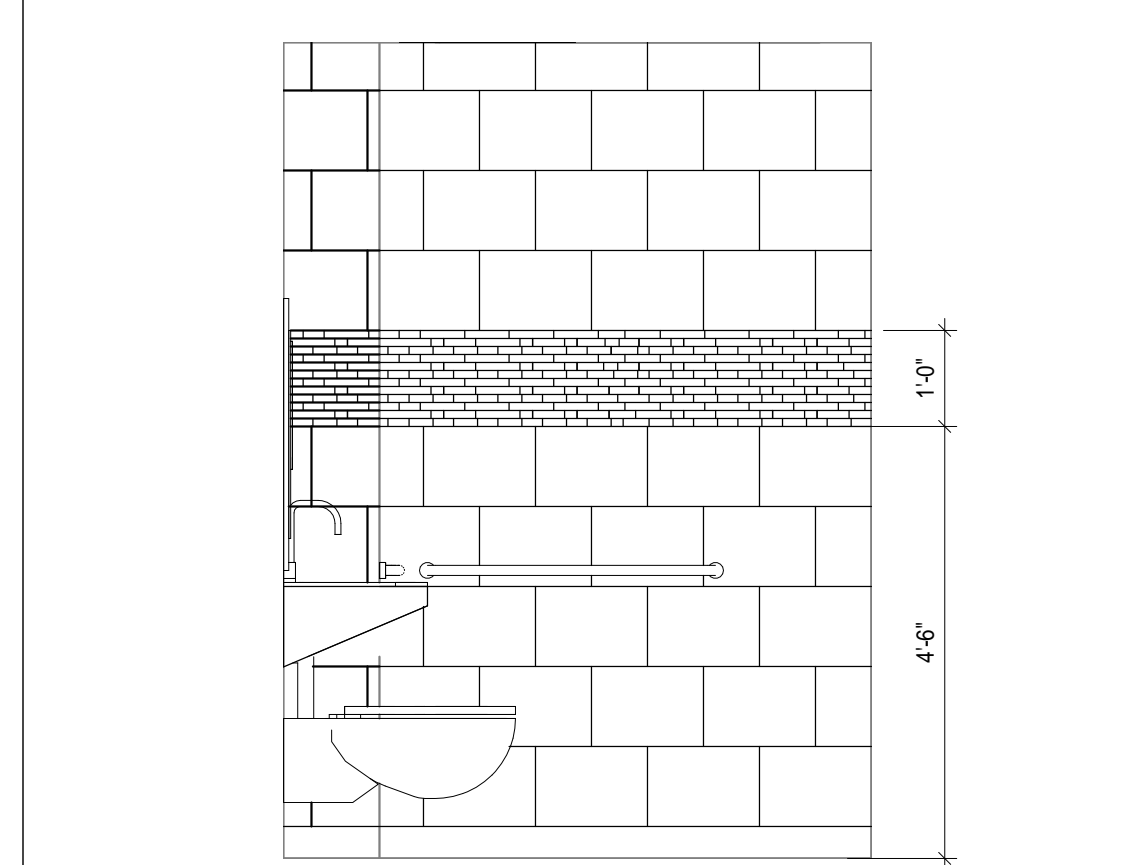


24 SINGLE RESTROOM - TYPICAL
 1/2" = 1'-0"

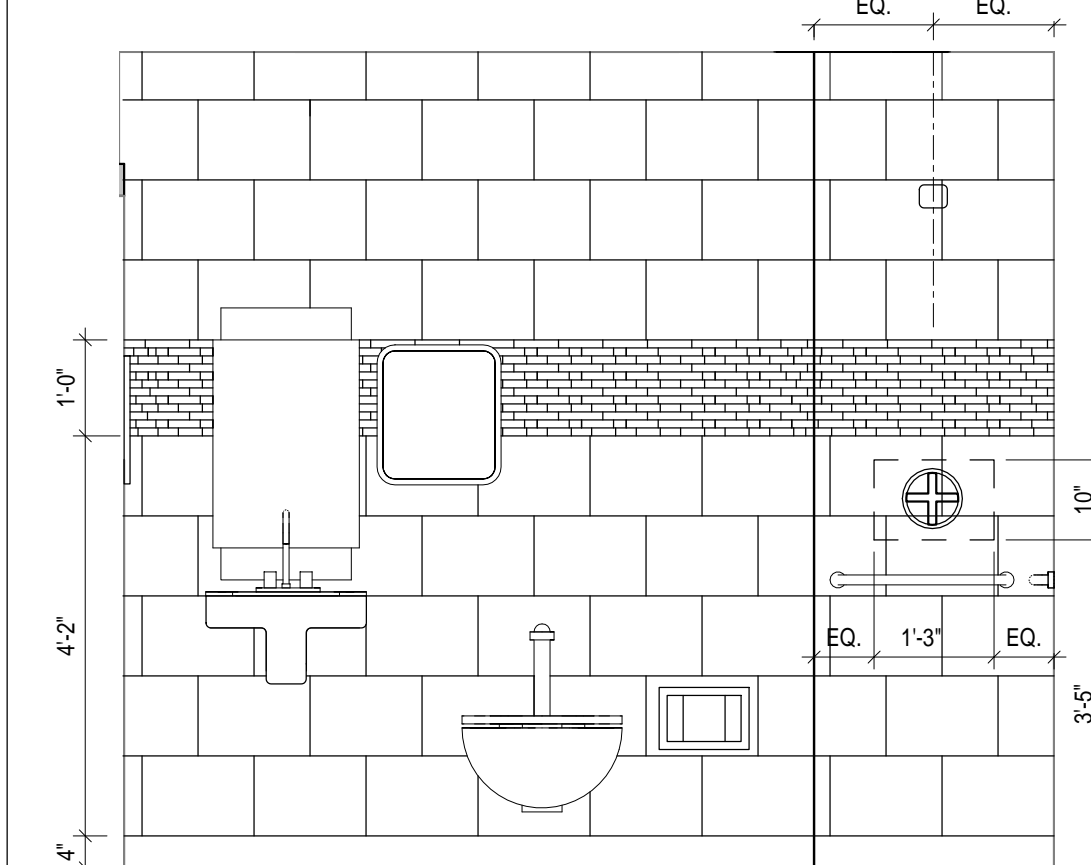


23 SINGLE RESTROOM - TYPICAL
 1/2" = 1'-0"

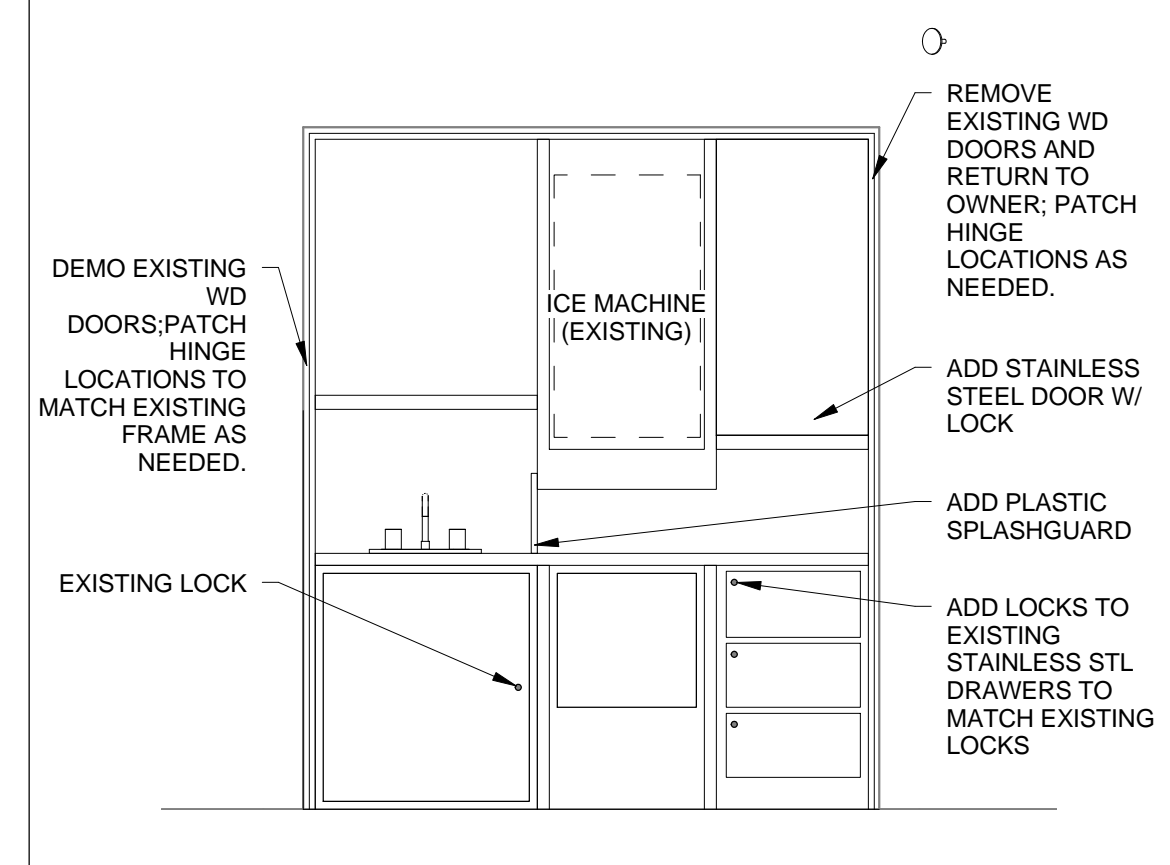


22 NOURISHMENT STATION
 1/2" = 1'-0"

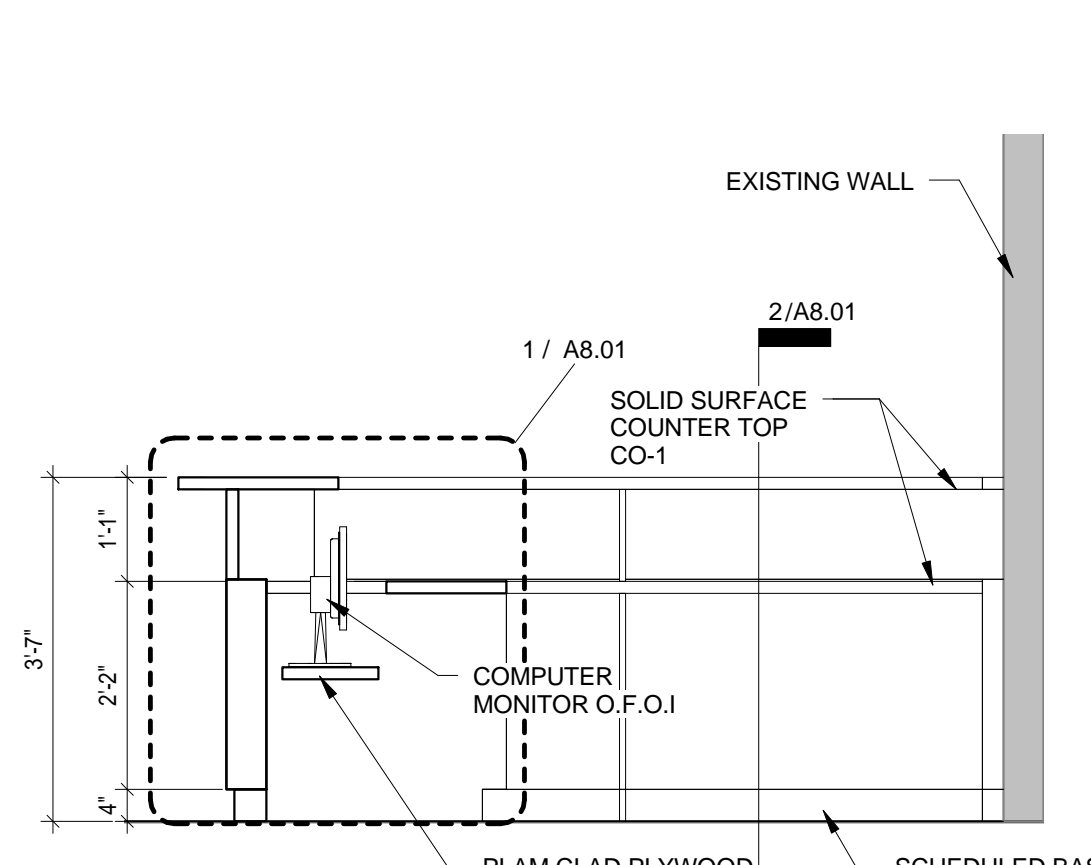


21 NURSE STATION - INTERIOR
 1/2" = 1'-0"

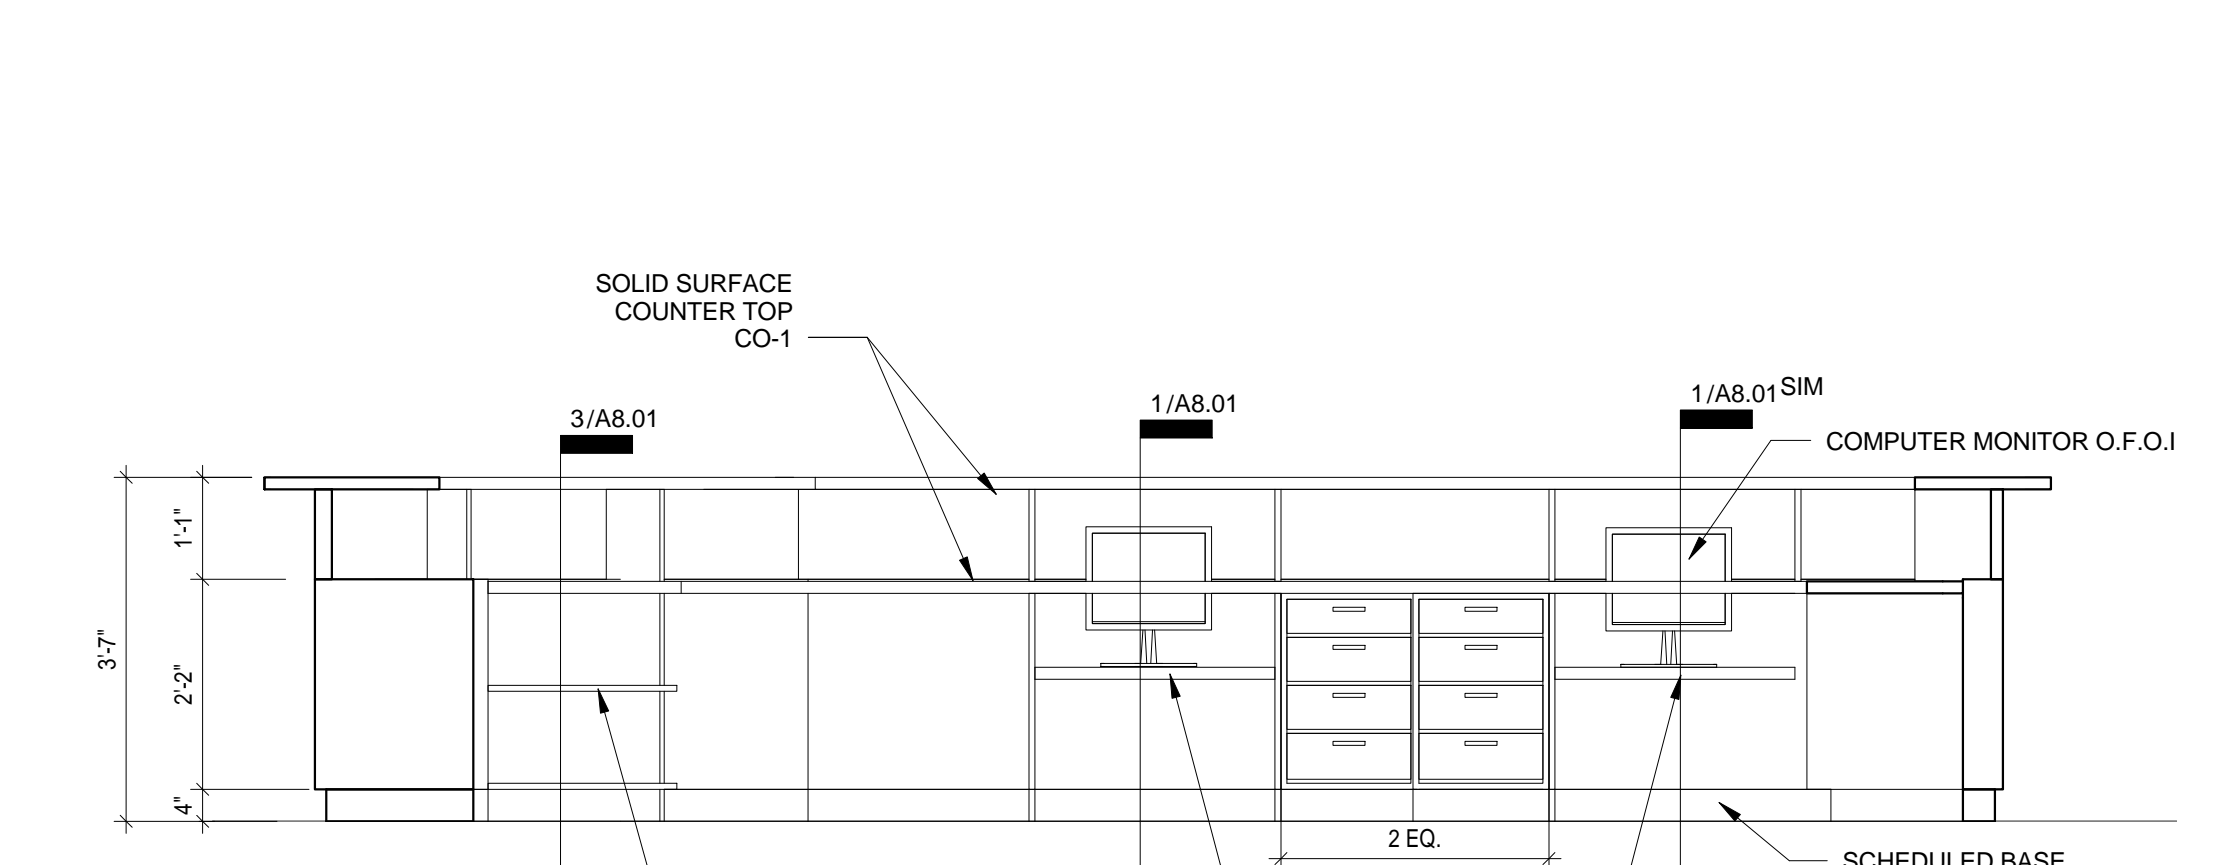


20 NURSE STATION - INTERIOR
 1/2" = 1'-0"

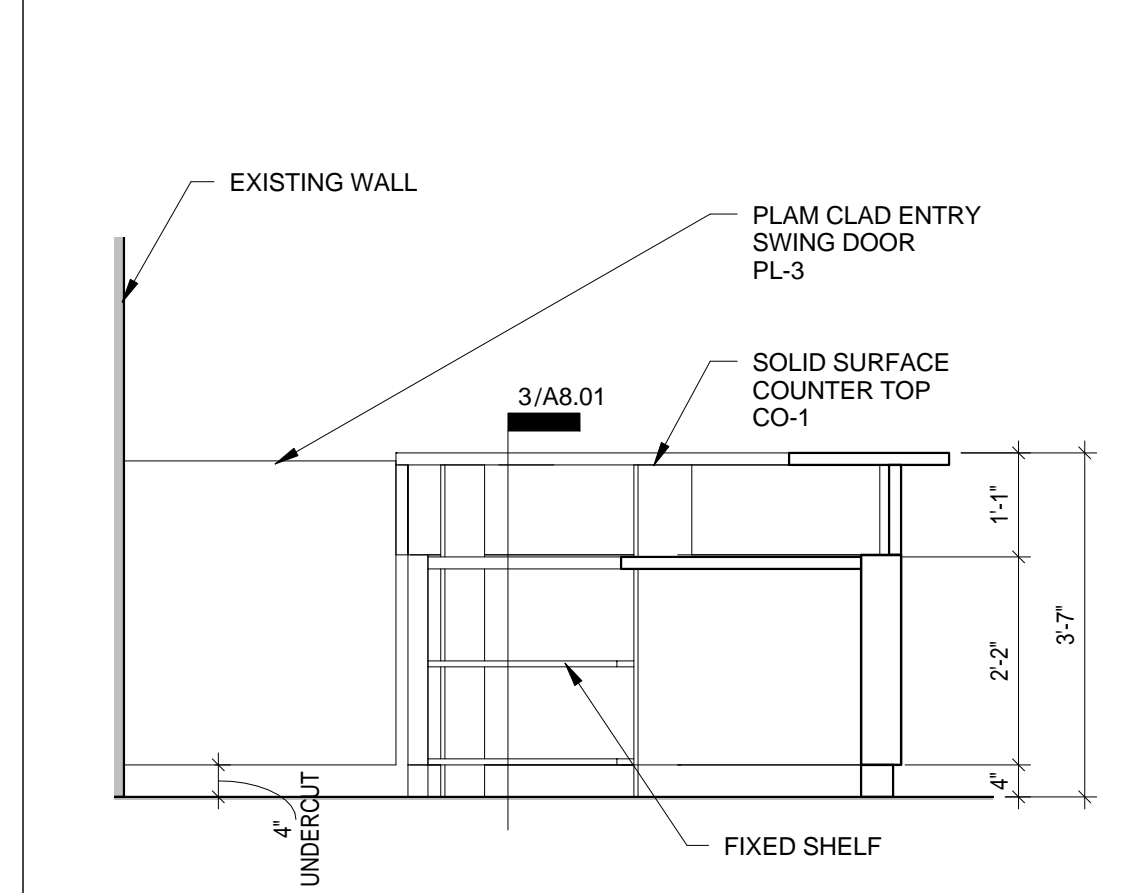


18 NURSE STATION - INTERIOR
 1/2" = 1'-0"

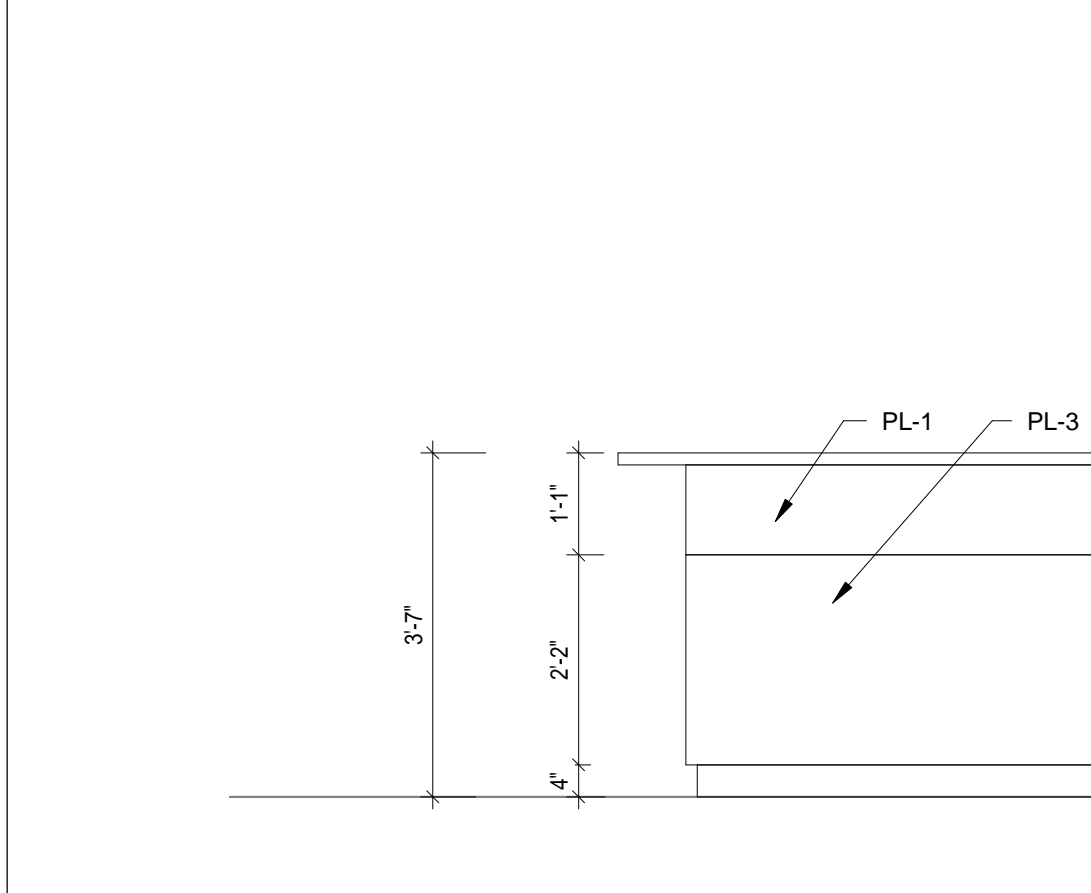


17 NURSE STATION - EXTERIOR
 1/2" = 1'-0"

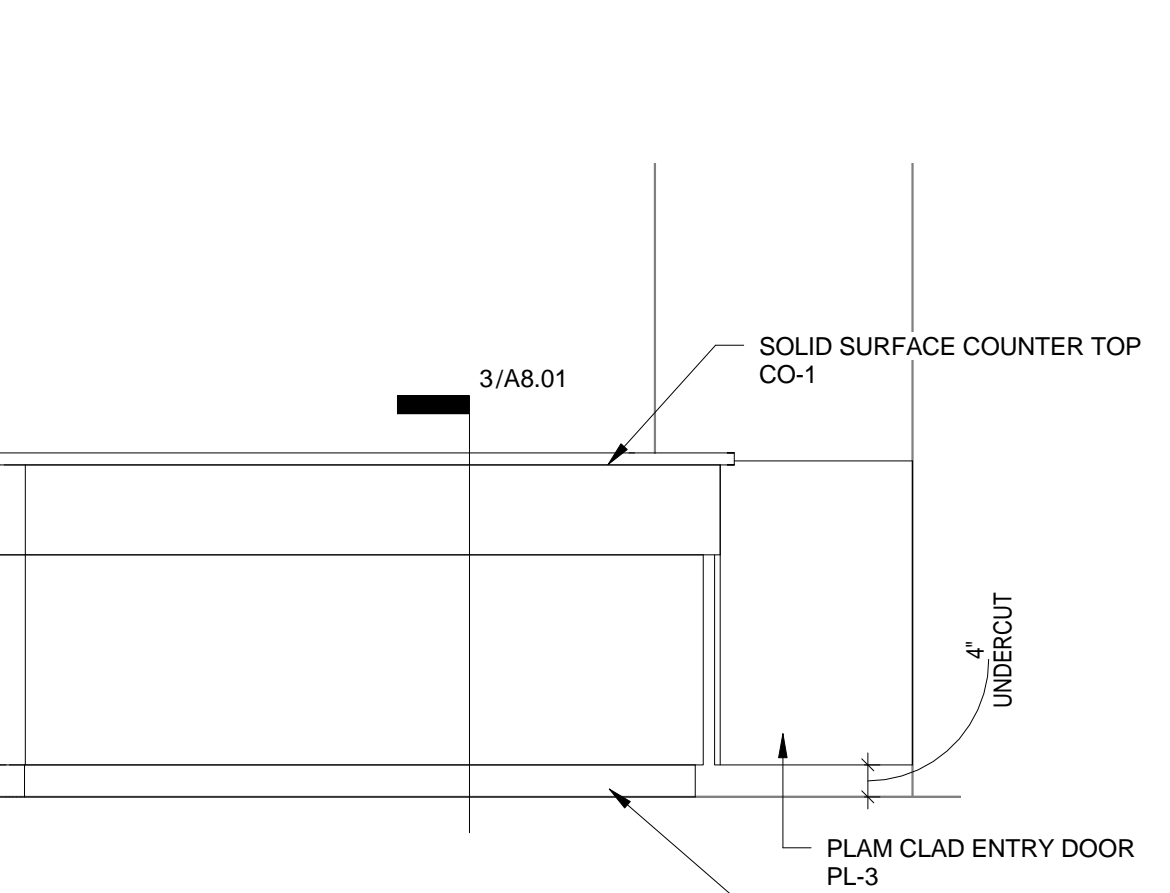


15 NURSE STATION - EXTERIOR
 1/2" = 1'-0"

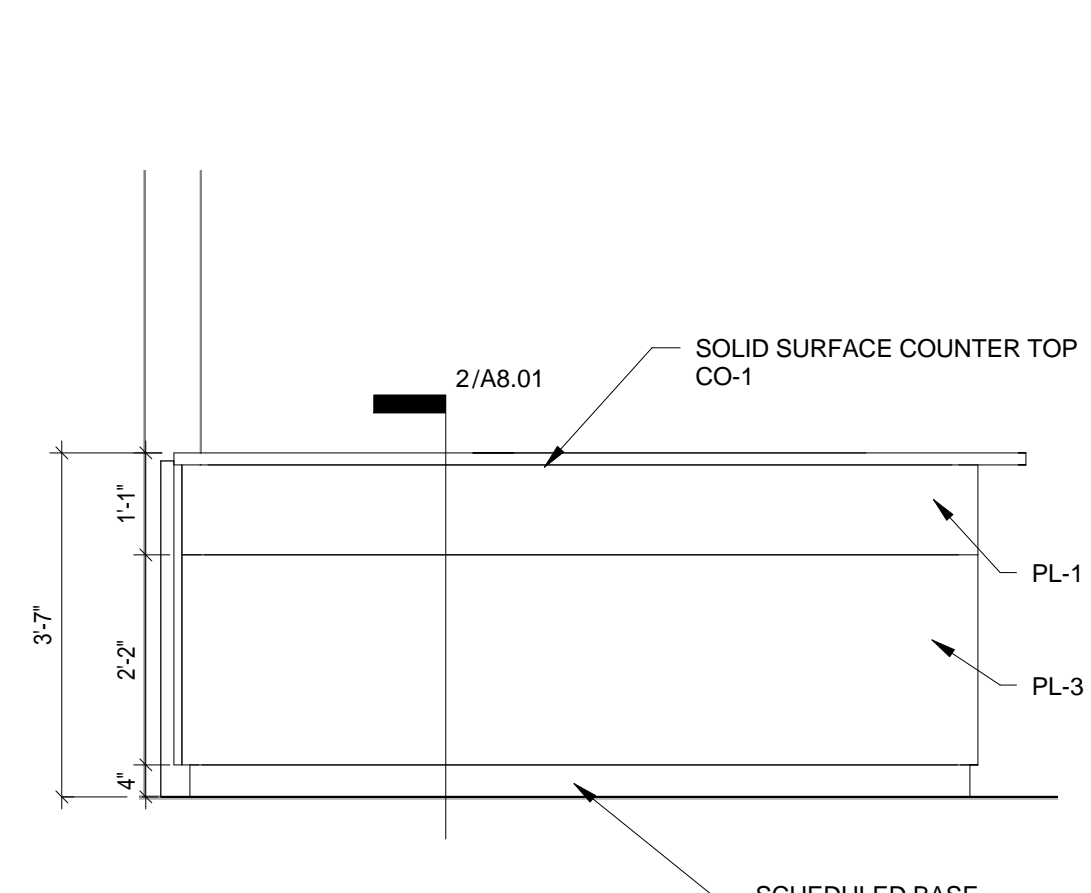


14 NURSE STATION - EXTERIOR
 1/2" = 1'-0"

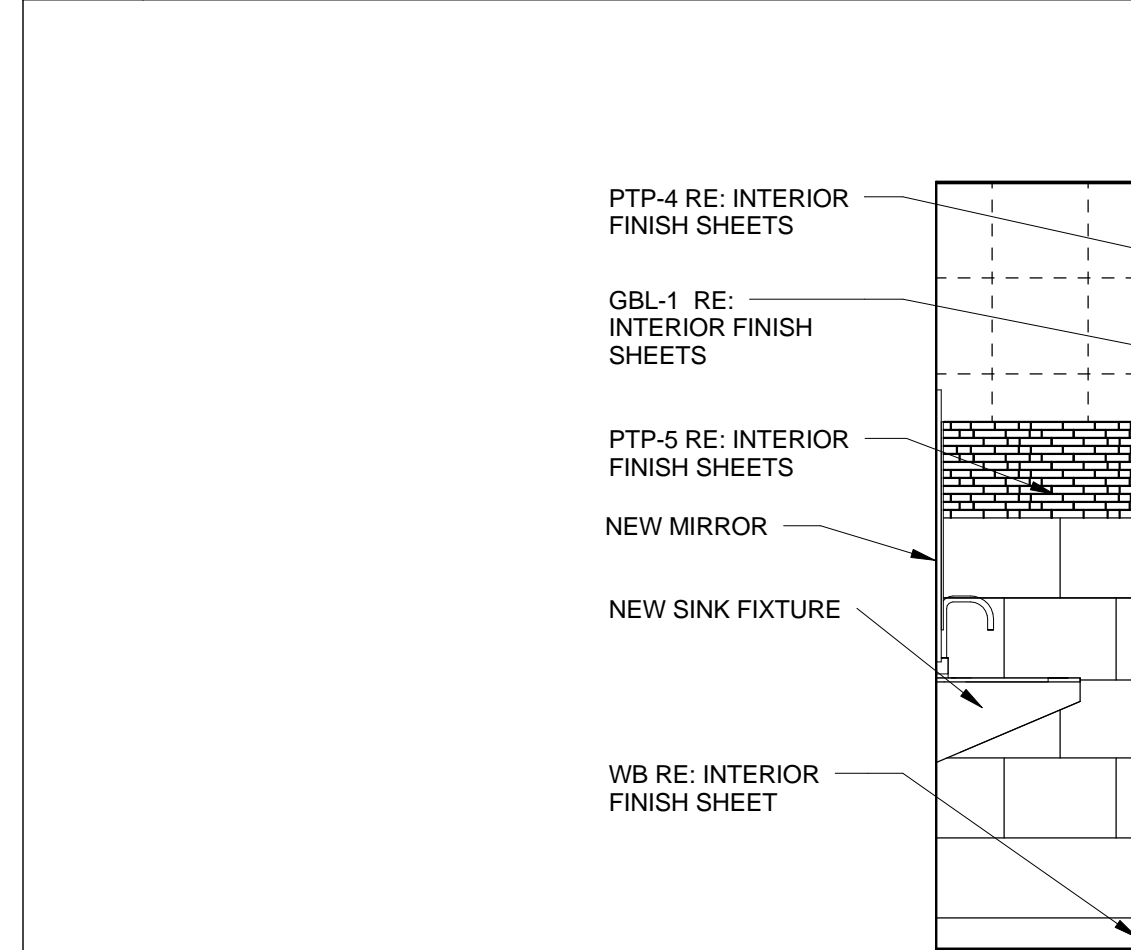


12 UNIT 3D RESTROOM ELEVATION
 1/2" = 1'-0"

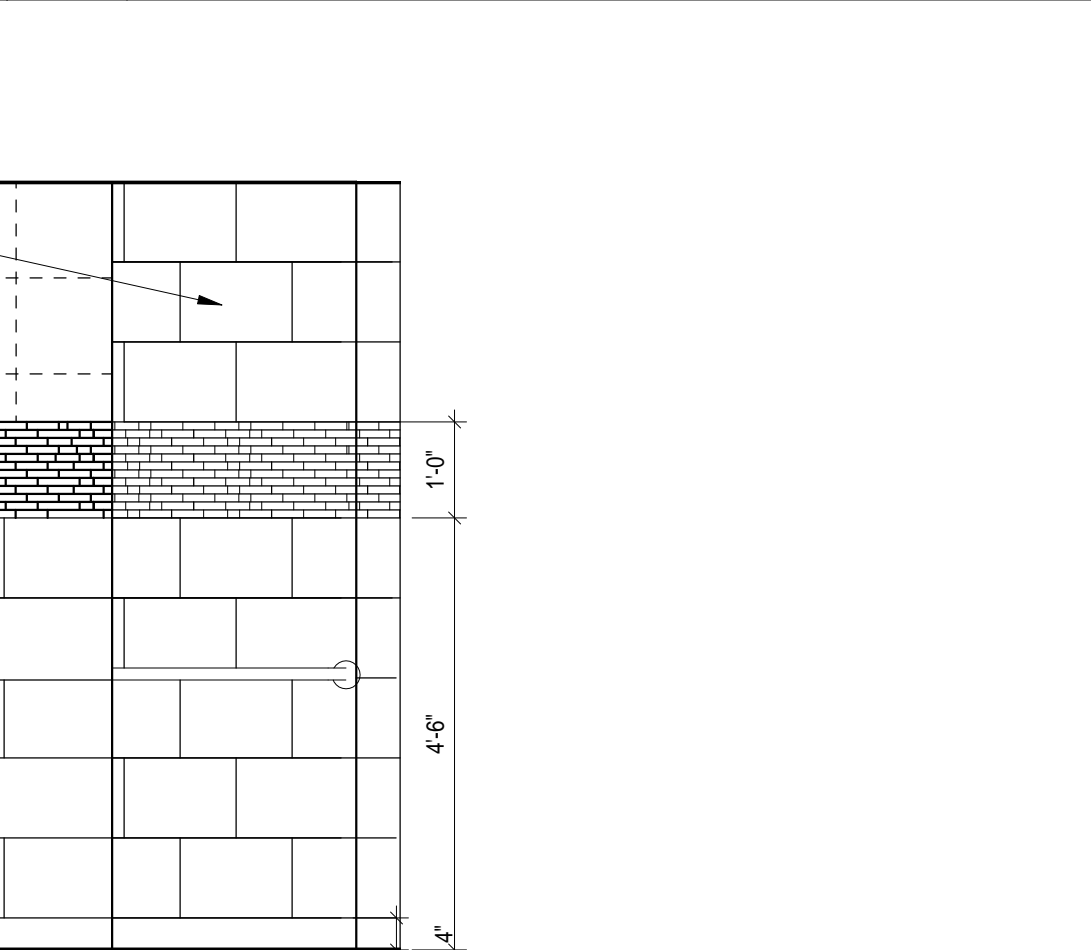


10 UNIT 3D RESTROOM ELEVATION
 1/2" = 1'-0"

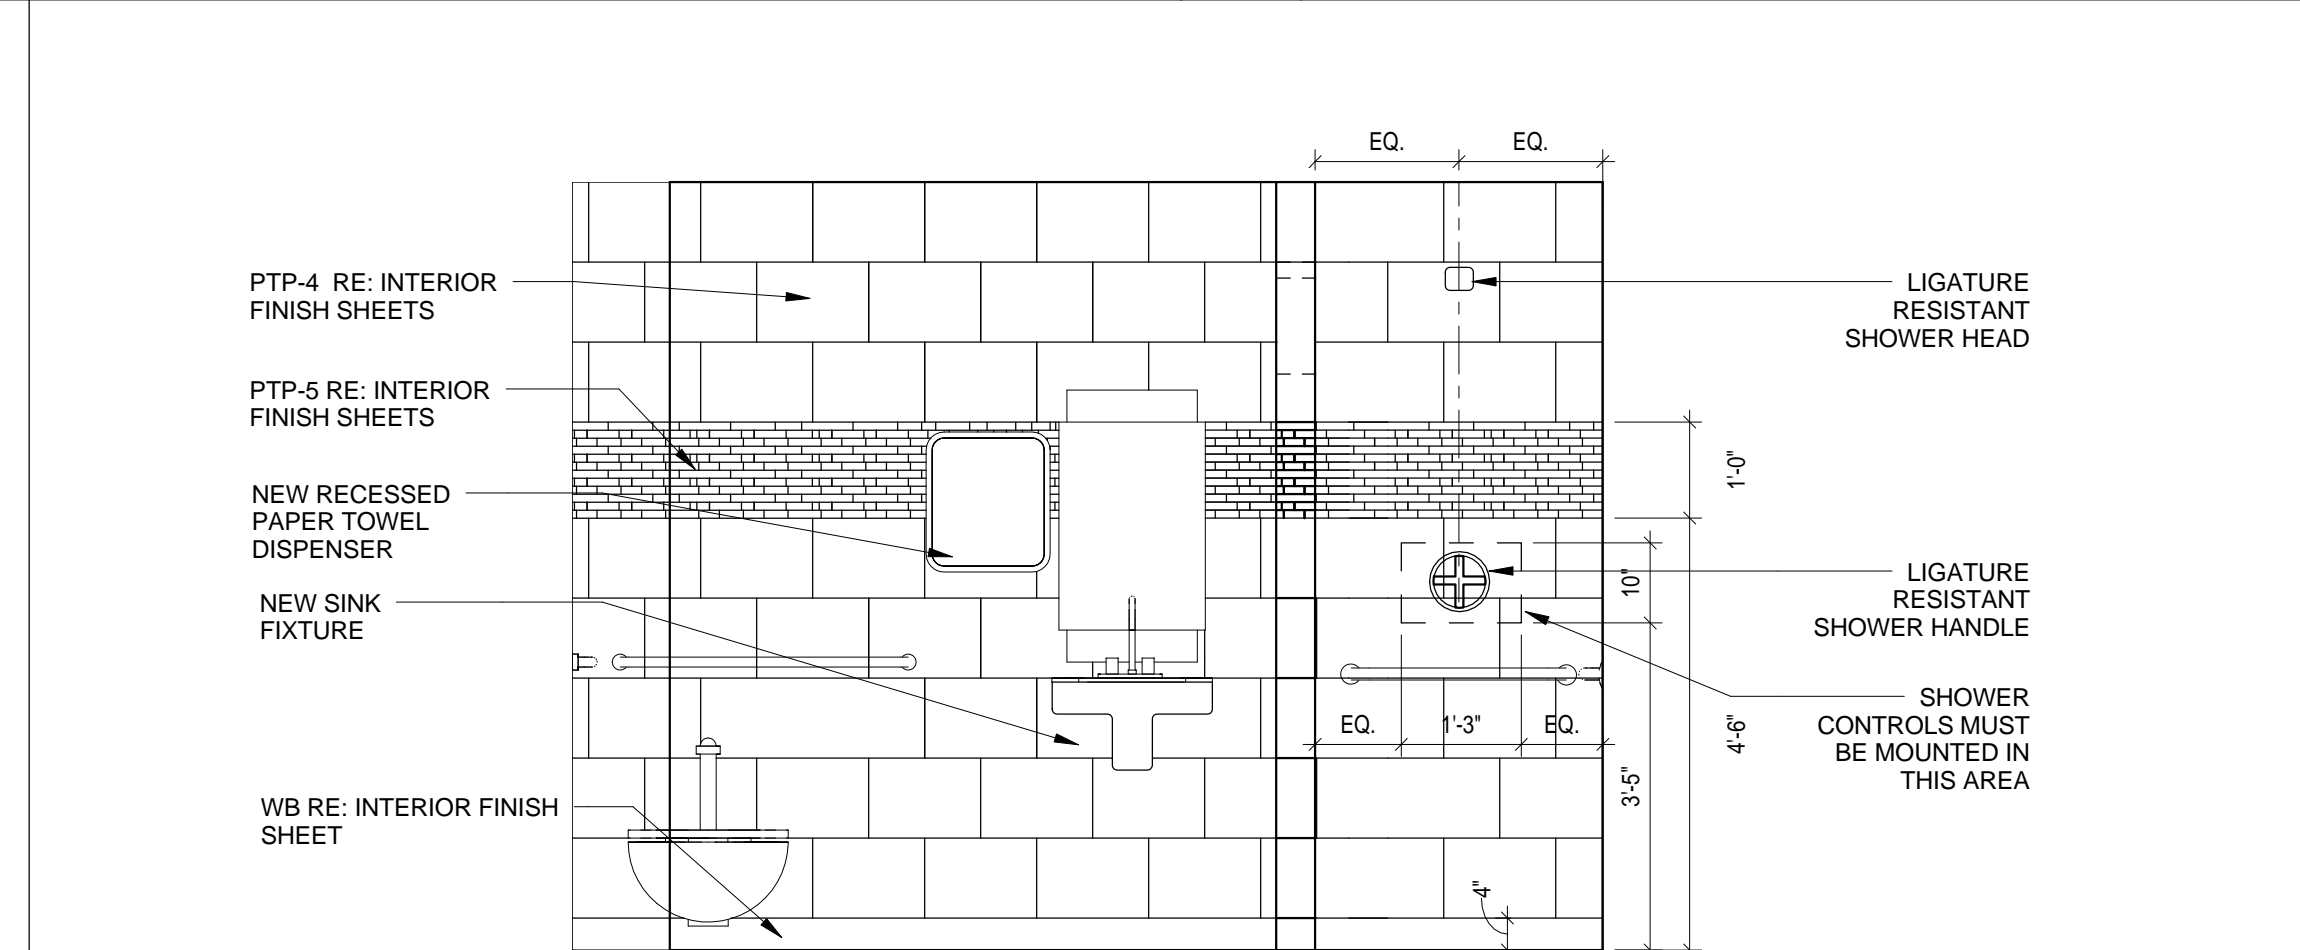


8 TYPICAL RESTROOM ELEVATION
 1/2" = 1'-0"

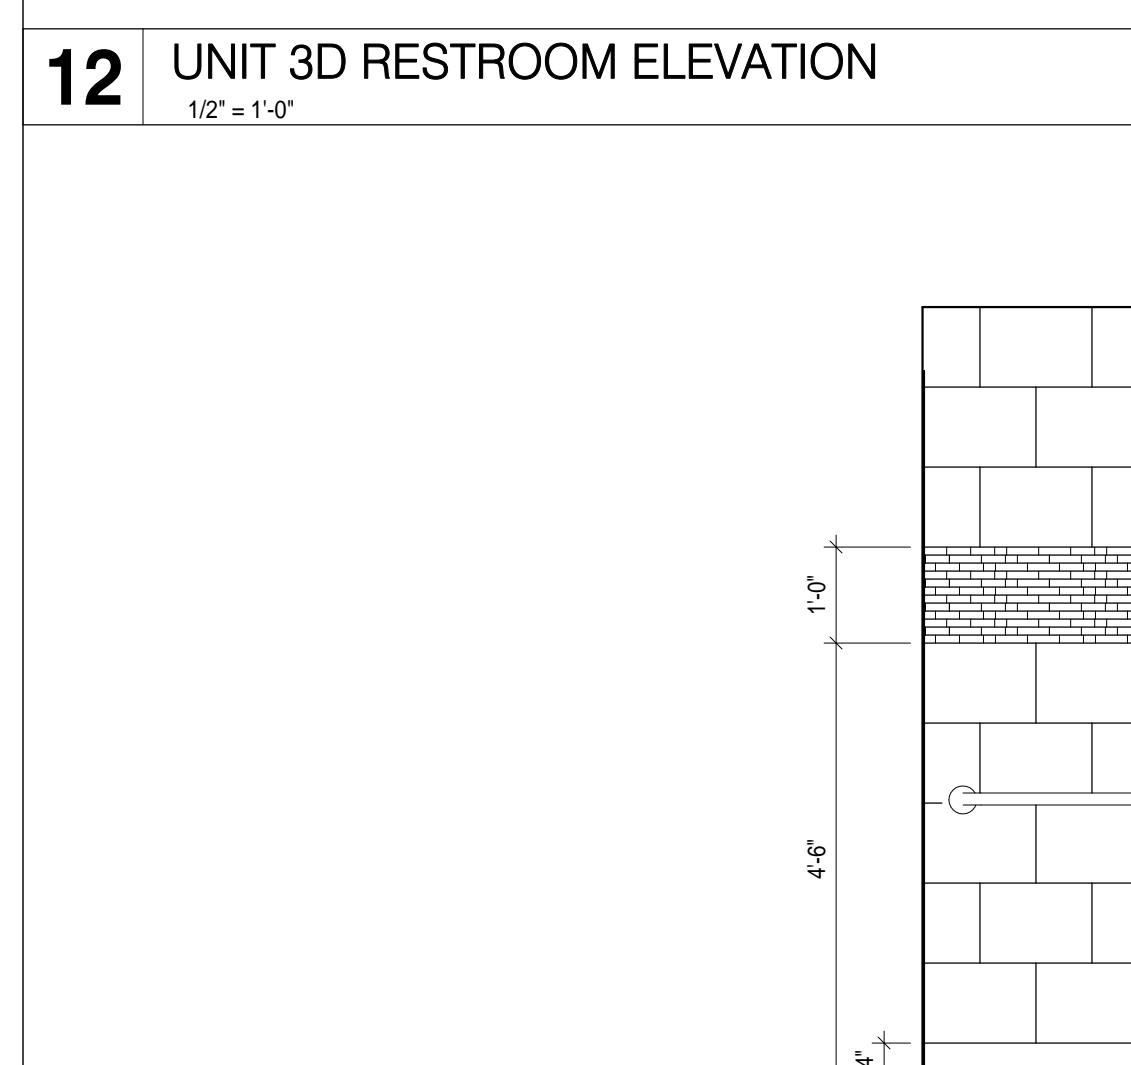

6 TYPICAL RESTROOM ELEVATION
 1/2" = 1'-0"

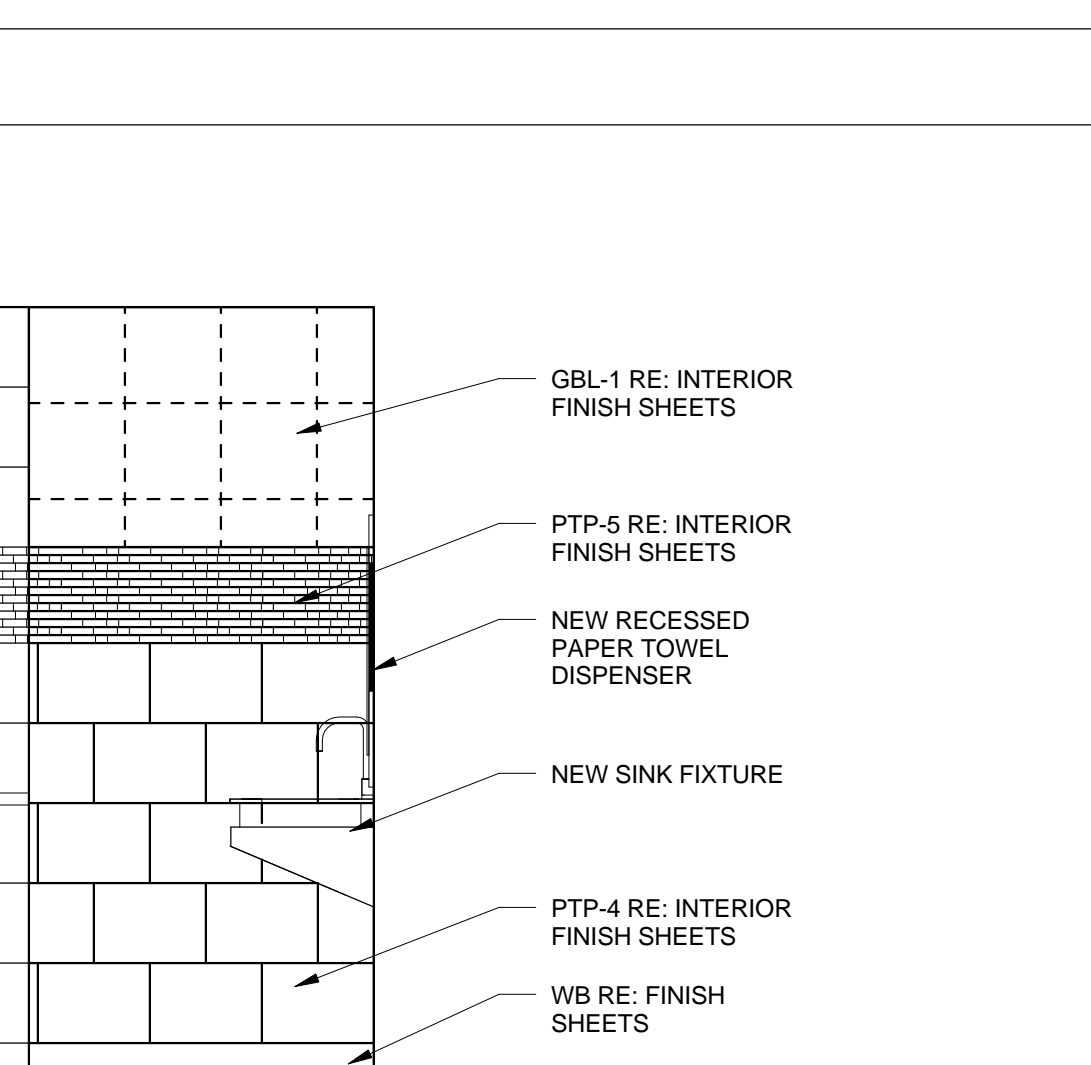

4 TYPICAL RESTROOM ELEVATION
 1/2" = 1'-0"

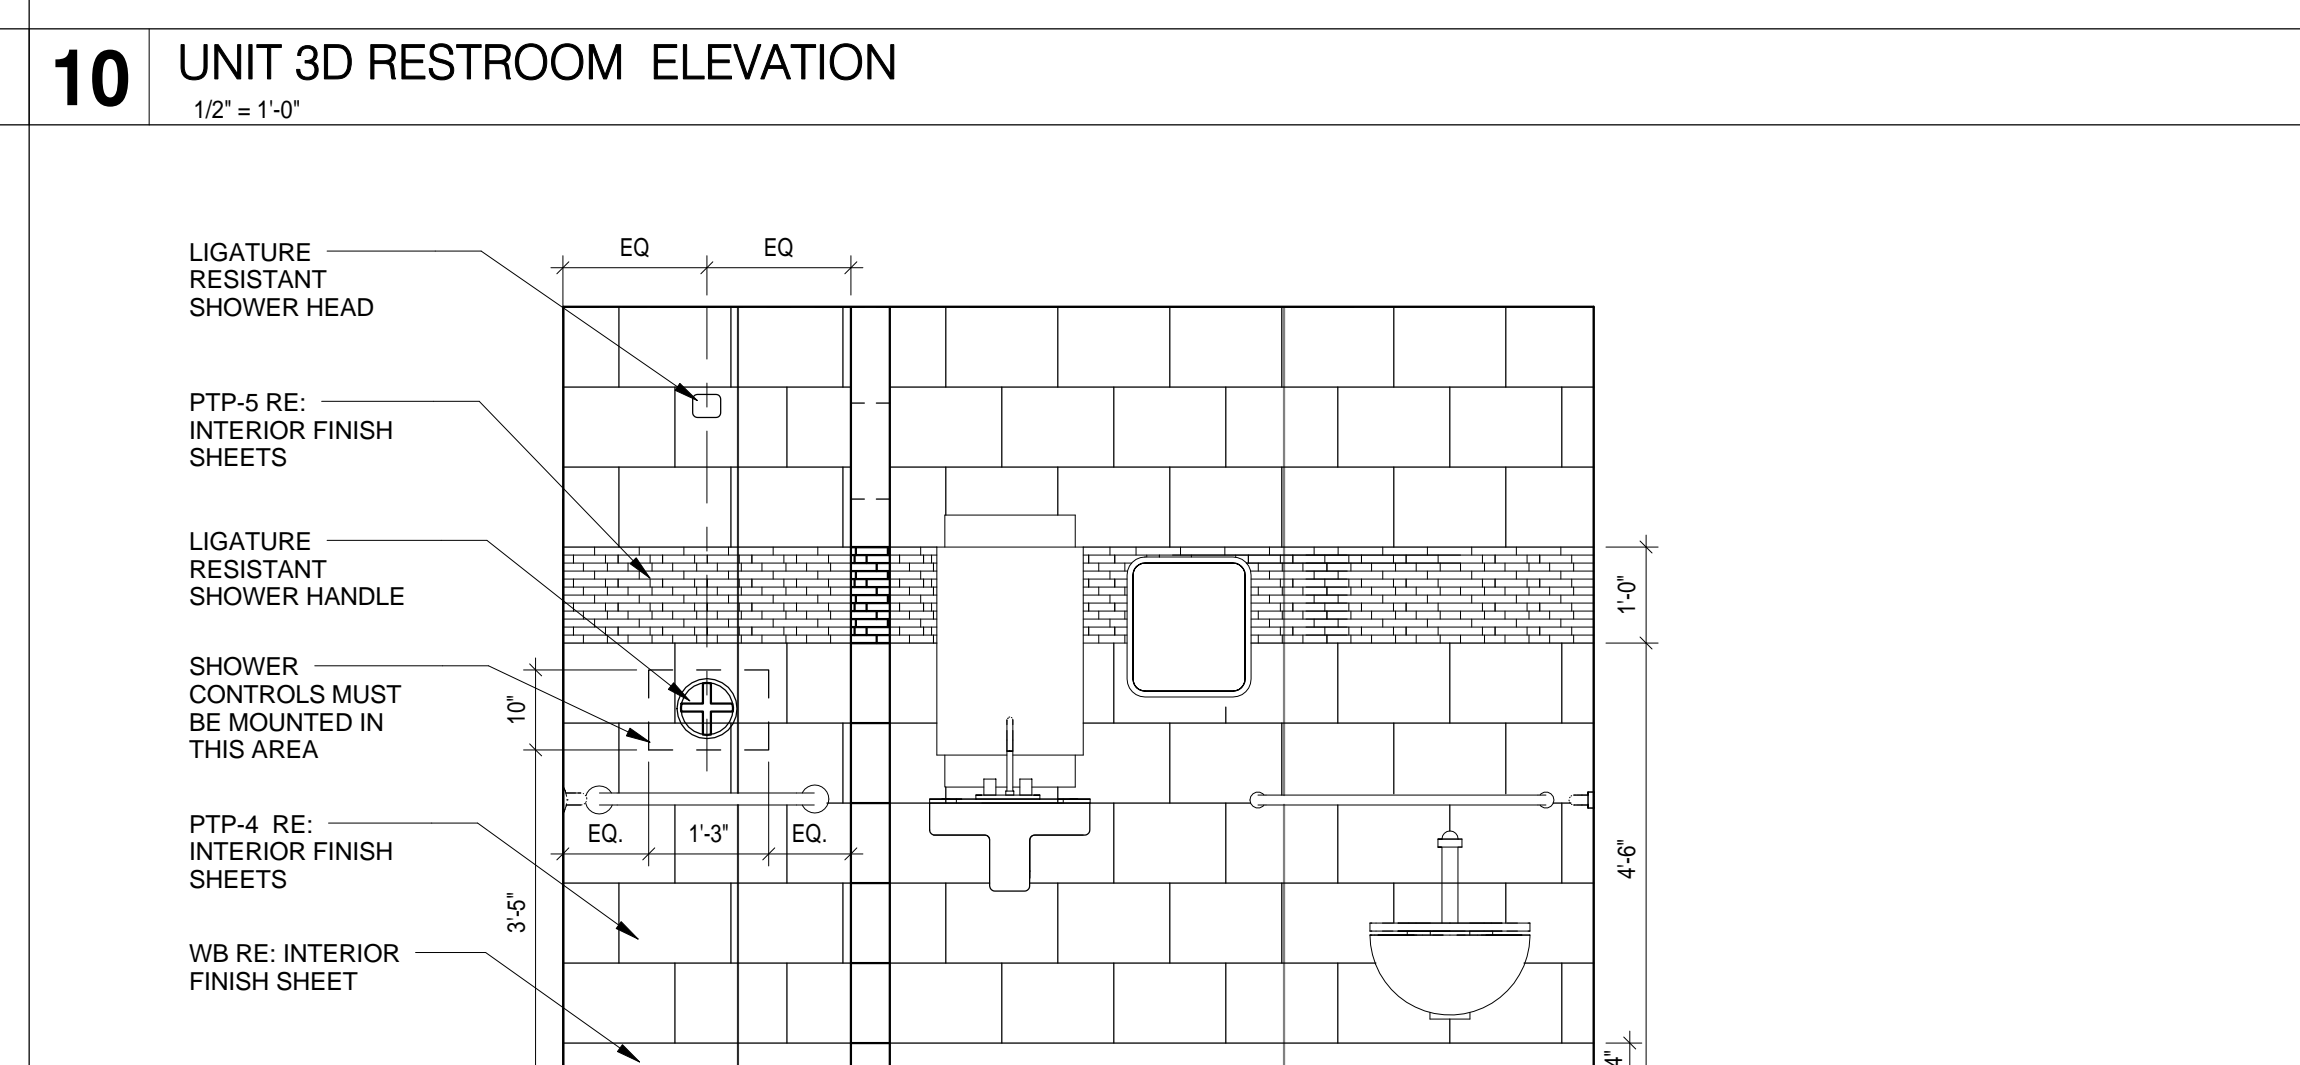

2 TYPICAL RESTROOM ELEVATION
 1/2" = 1'-0"

No.	Description	Date

BRACING PLAN REQUIREMENTS (INTERIOR WALLS ONLY)

BRACE FRAMING FOR 3 5/8" STUDS

STUD TYPE	STUD PROP.	SPACING	MAX. LENGTH	MISCELLANEOUS
SJ 20 (40 KSI) (20 GA.)	1X = 0.541 IN ⁴	4'-0" O.C.	14'-0"	BRACE AT MID-POINT FOR LENGTHS OVER 14'-0"
	α = 1.429 IN			
	A = 0.2136 IN ²			
	Sx = 0.273 IN ³			


BRACE FRAMING FOR 6" STUDS

STUD TYPE	STUD PROP.	SPACING	MAX. LENGTH	MISCELLANEOUS
SJ 20 (40 KSI) (20 GA.)	1X = 1.787 IN ⁴	4'-0" O.C.	20'-0"	BRACE AT MID-POINT FOR LENGTHS OVER 20'-0"
	α = 2.253 IN			
	A = 0.2148 IN ²			
	Sx = 0.539 IN ³			

LIMITING HEIGHT OF METAL STUDS

STUD SIZE	SPACING	25 GA.	20 GA.
2 1/2"	16"	11'-3"	12'-10"
3 5/8"	16"	14'-4"	16'-5"
6"	16"	19'-9"	24'-6"

NOTE: THE TABLE INDICATED ABOVE IS BASED ON "DIETRICH" LIMITING HEIGHT CHART AND IS TO BE USED AS A GUIDE FOR INTERIOR WALL CONSTRUCTION. THE TABLE IS BASED WITH SHEATHING BOARD ON BOTH SIDES OF PARTITION.

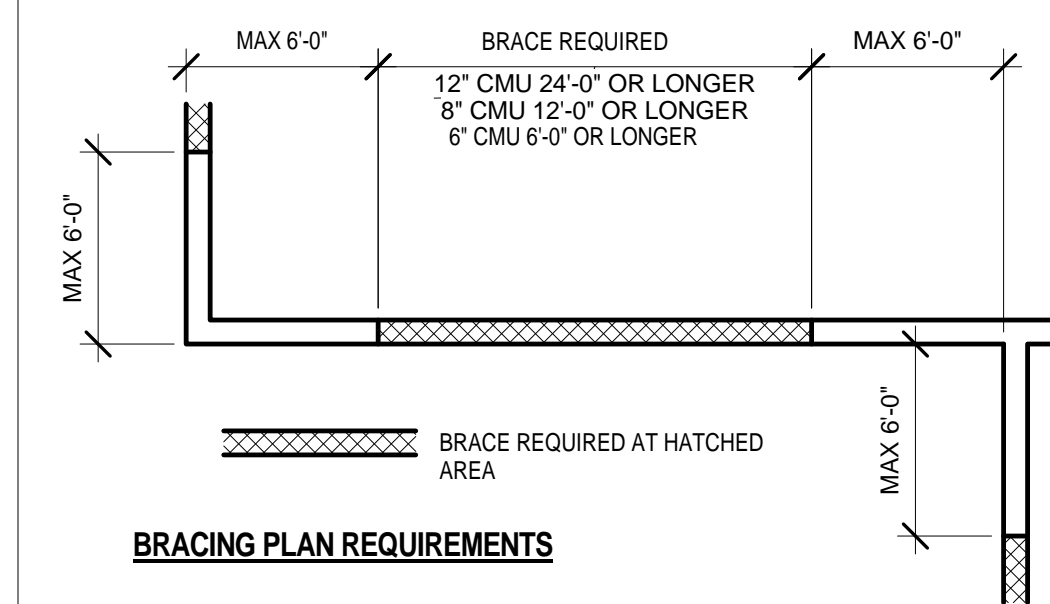

NON-LOAD BEARING WALL BRACES. BRACING AT THE TOP OF MASONRY WALLS IS REQUIRED ON STRAIGHT RUNS OF WALL MORE THAN SIX FEET FROM A CORNER OR INTERSECTING WALL.

25 PARTITION TYPES-TYP. CMU WALL BRACING
1/2" = 1'-0"

- BRACING NOTES:**
- AT WALLS THAT TERMINATE ABOVE CEILING, CONTRACTOR MAY CONTINUE METAL STUD FRAMED WALLS TO UNDERSIDE OF METAL DECK AND OMIT DIAGONAL BRACING IF HEIGHT DOES NOT EXCEED LIMITING HEIGHT OF METAL STUD AS INDICATED ON CHART BELOW.
 - PROVIDE INTERMEDIATE BRACING AT ALL PARTITIONS THAT EXCEED LIMITING HEIGHT OF METAL STUDS AS INDICATED ON CHART BELOW.
 - ALL BRACING SHALL BE AT STUD POINTS.
 - HERE BRACING METHODS BETWEEN THIS SHEET AND STRUCTURE CONFLICT, STRUCTURE SHALL OVERRIDE. NOTIFY ARCHITECT.

- TERMINATION NOTES:**
- AT ALL RATED PARTITIONS, FILL VOIDS IN METAL DECK AT TOP OF PARTITIONS WITH FIRESAFING.

- GYPSUM WALLBOARD PARTITION NOTES:**
- ALL METAL STUD PARTITIONS ARE 25 GAUGE METAL STUDS AT 16" O.C. UNLESS NOTED OTHERWISE. IF THE LIMITING HEIGHT FOR A PARTITION IS EXCEEDED, INCREASE GAUGE OF STUDS AS INDICATED ON LIMITING HEIGHT OF METAL STUDS TABLE BELOW. NOTIFY ARCHITECT PRIOR TO INSTALLATION.

- PROVIDE 20 GAUGE METAL STUDS IN LIEU OF 25 GAUGE METAL STUDS AT STUD WALL CERAMIC TILE LOCATIONS.
- SET ALL FLOOR TRACKS ON A CONTINUOUS RIBBON OF SEALANT.
- AT PARTITIONS DESIGNATED TO HAVE SOUND ATTENUATION BLANKETS

- PROVIDE 3-1/2" OR 6" THICK (MATCH STUD SIZE) SOUND ATTENUATION BLANKETS OR BATTS FULL HEIGHT OF PARTITION, UNLESS NOTED OTHERWISE.
- FILL ALL DECK VOIDS WITH SOUND ATTENUATION MATERIAL.
- SEAL PARTITION PERIMETER AND ALL PENETRATIONS WITH ACOUSTICAL SEALANT.
- TAPE AND BED OR CAULK ALL JOINTS BETWEEN FIRST AND SECOND LAYERS OF GYPSUM BOARD AND AT ALL SOUND RATED WALLS TAKEN THROUGH THE CEILING.
- PROVIDE CONTINUOUS ACOUSTICAL SEALANT AT BOTTOM OF PARTITION ON BOTH SIDES AT NON-RATED PARTITIONS AND PROVIDE CONTINUOUS FIRE RATED SEALANT AT FIRE-RATED PARTITIONS.

- PROVIDE TILE BACKER BOARD ON WALLS BEHIND AND ADJACENT TO PLUMBING FIXTURES, AND BEHIND ALL CERAMIC TILE AT ALL DAMP LOCATIONS AT GYPSUM BOARD PARTITIONS.
- RIGIDLY BRACE ALL DOOR JAMBS AT THE HEAD, HINGE AND STRIKE SIDES AND WINDOW AT THE HEAD, SILL AND JAMBS.
- LOCATE CONTROL JOINTS IN GYPSUM BOARD PARTITIONS AS FOLLOWS:

- PARTITIONS OR FLURRING RUNS EXCEEDING 30'-0"
- WHERE A PARTITION ABUTS A STRUCTURAL ELEMENT OR DISSIMILAR WALL
- CONSTRUCTION CHANGES WITHIN PLANE OF PARTITION
- AT EXPANSION OR CONTROL JOINTS THROUGHOUT THE BUILDING
- AT BOTH JAMBS OF INTERIOR AND EXTERIOR DOOR AND WINDOW FRAMES, ABOVE AND BELOW FULL HEIGHT OF WALL

- FIRE RATED PARTITIONS:

 - PROVIDE TYPE "X" FIRE RESISTIVE GYPSUM BOARD, 5/8" THICK UNLESS NOTED OTHERWISE.
 - FILL ALL VOIDS AT DECK WITH FOAM FIRESTOP SEALANT
 - SEAL PARTITION PERIMETER AND ALL PENETRATIONS WITH RATED SEALANT
 - REFER TO UL MANUAL FOR RATED PARTITION DESCRIPTIONS AND DETAILED CONSTRUCTION NOTES.


- PROVIDE DEFLECTION TRACK AT ALL STUD CONNECTIONS AT BOTTOM OF DECK AND FILL VOIDS AS REQUIRED.
- EXTEND GYPSUM BOARD ABOVE ADJACENT FINISHED CEILING MINIMUM OF SIX INCHES (6").

HOW TO USE THIS SHEET:


- NOT EVERY PARTITION TYPE SHOWN IS NECESSARILY INTENDED FOR THE USE ON THIS PROJECT. REFER TO FLOOR PLANS FOR REFERENCE MARKS INDICATING APPLICABLE PARTITION TYPES.
- REFER TO BRACING DETAILS FOR SUPPORT OF THE TOP OF EACH PARTITION TYPE AND BRACING OF PARTITIONS THAT EXCEED LIMITING HEIGHT OF PARTITION TYPES.
- REFER TO FINISH SCHEDULES FOR APPLIED FINISHES TO BOTH SIDES OF WALLS.
- COORDINATE TOPS OF FINISHED WALLS WITH ADJACENT CEILING HEIGHTS PER SCHEDULES, SECTIONS AND/OR DETAILS.
- CONSULT ARCHITECT FOR ANY DISCREPANCIES OR QUESTIONS REGARDING PARTITIONS PRIOR TO INSTALLATION.

20 PARTITION TYPES-BRACING CHART
1/2" = 1'-0"

BRACING PLAN REQUIREMENTS

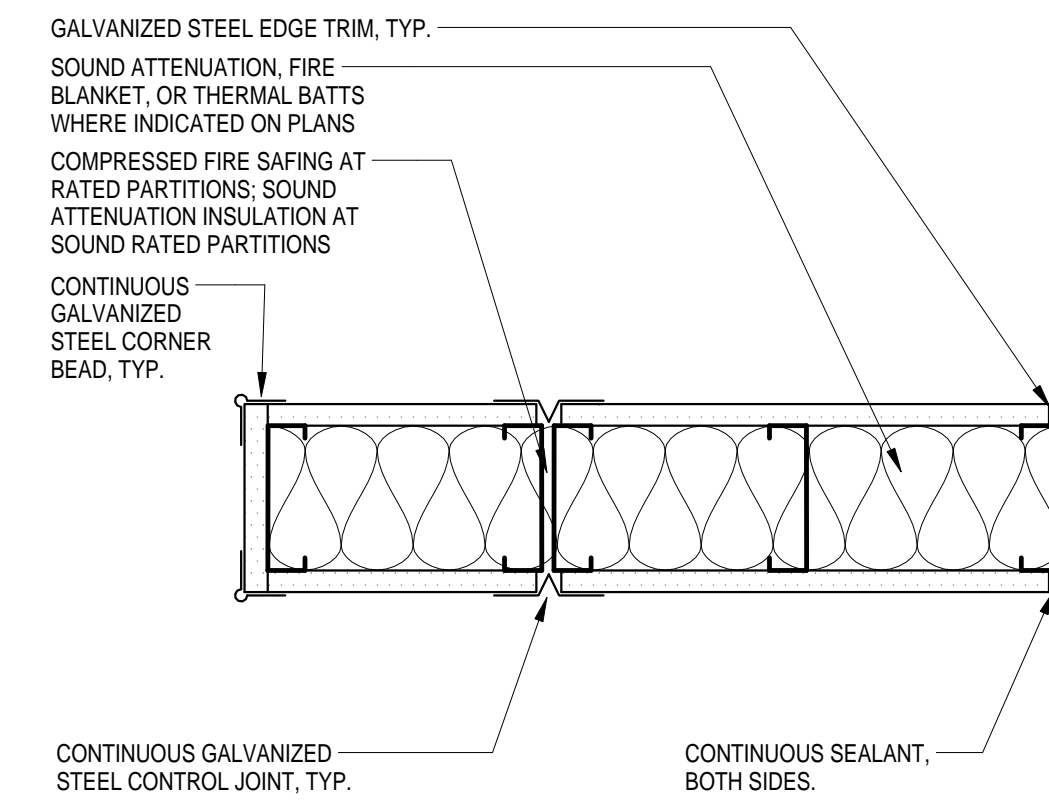


PLAN (TERMINATIONS, ENDS AND JOINTS)

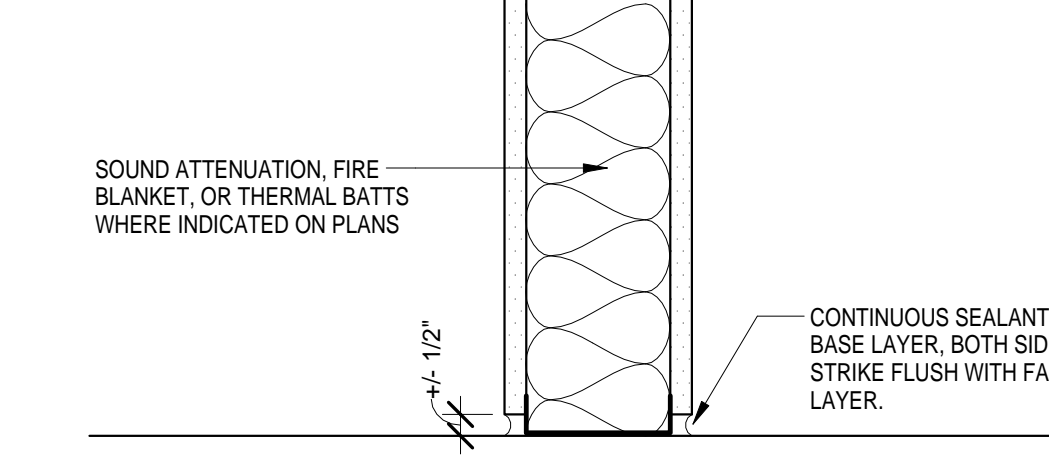


BASE TERMINATION

18 PARTITION TYPES-TYPICAL DETAILS
1/2" = 1'-0"

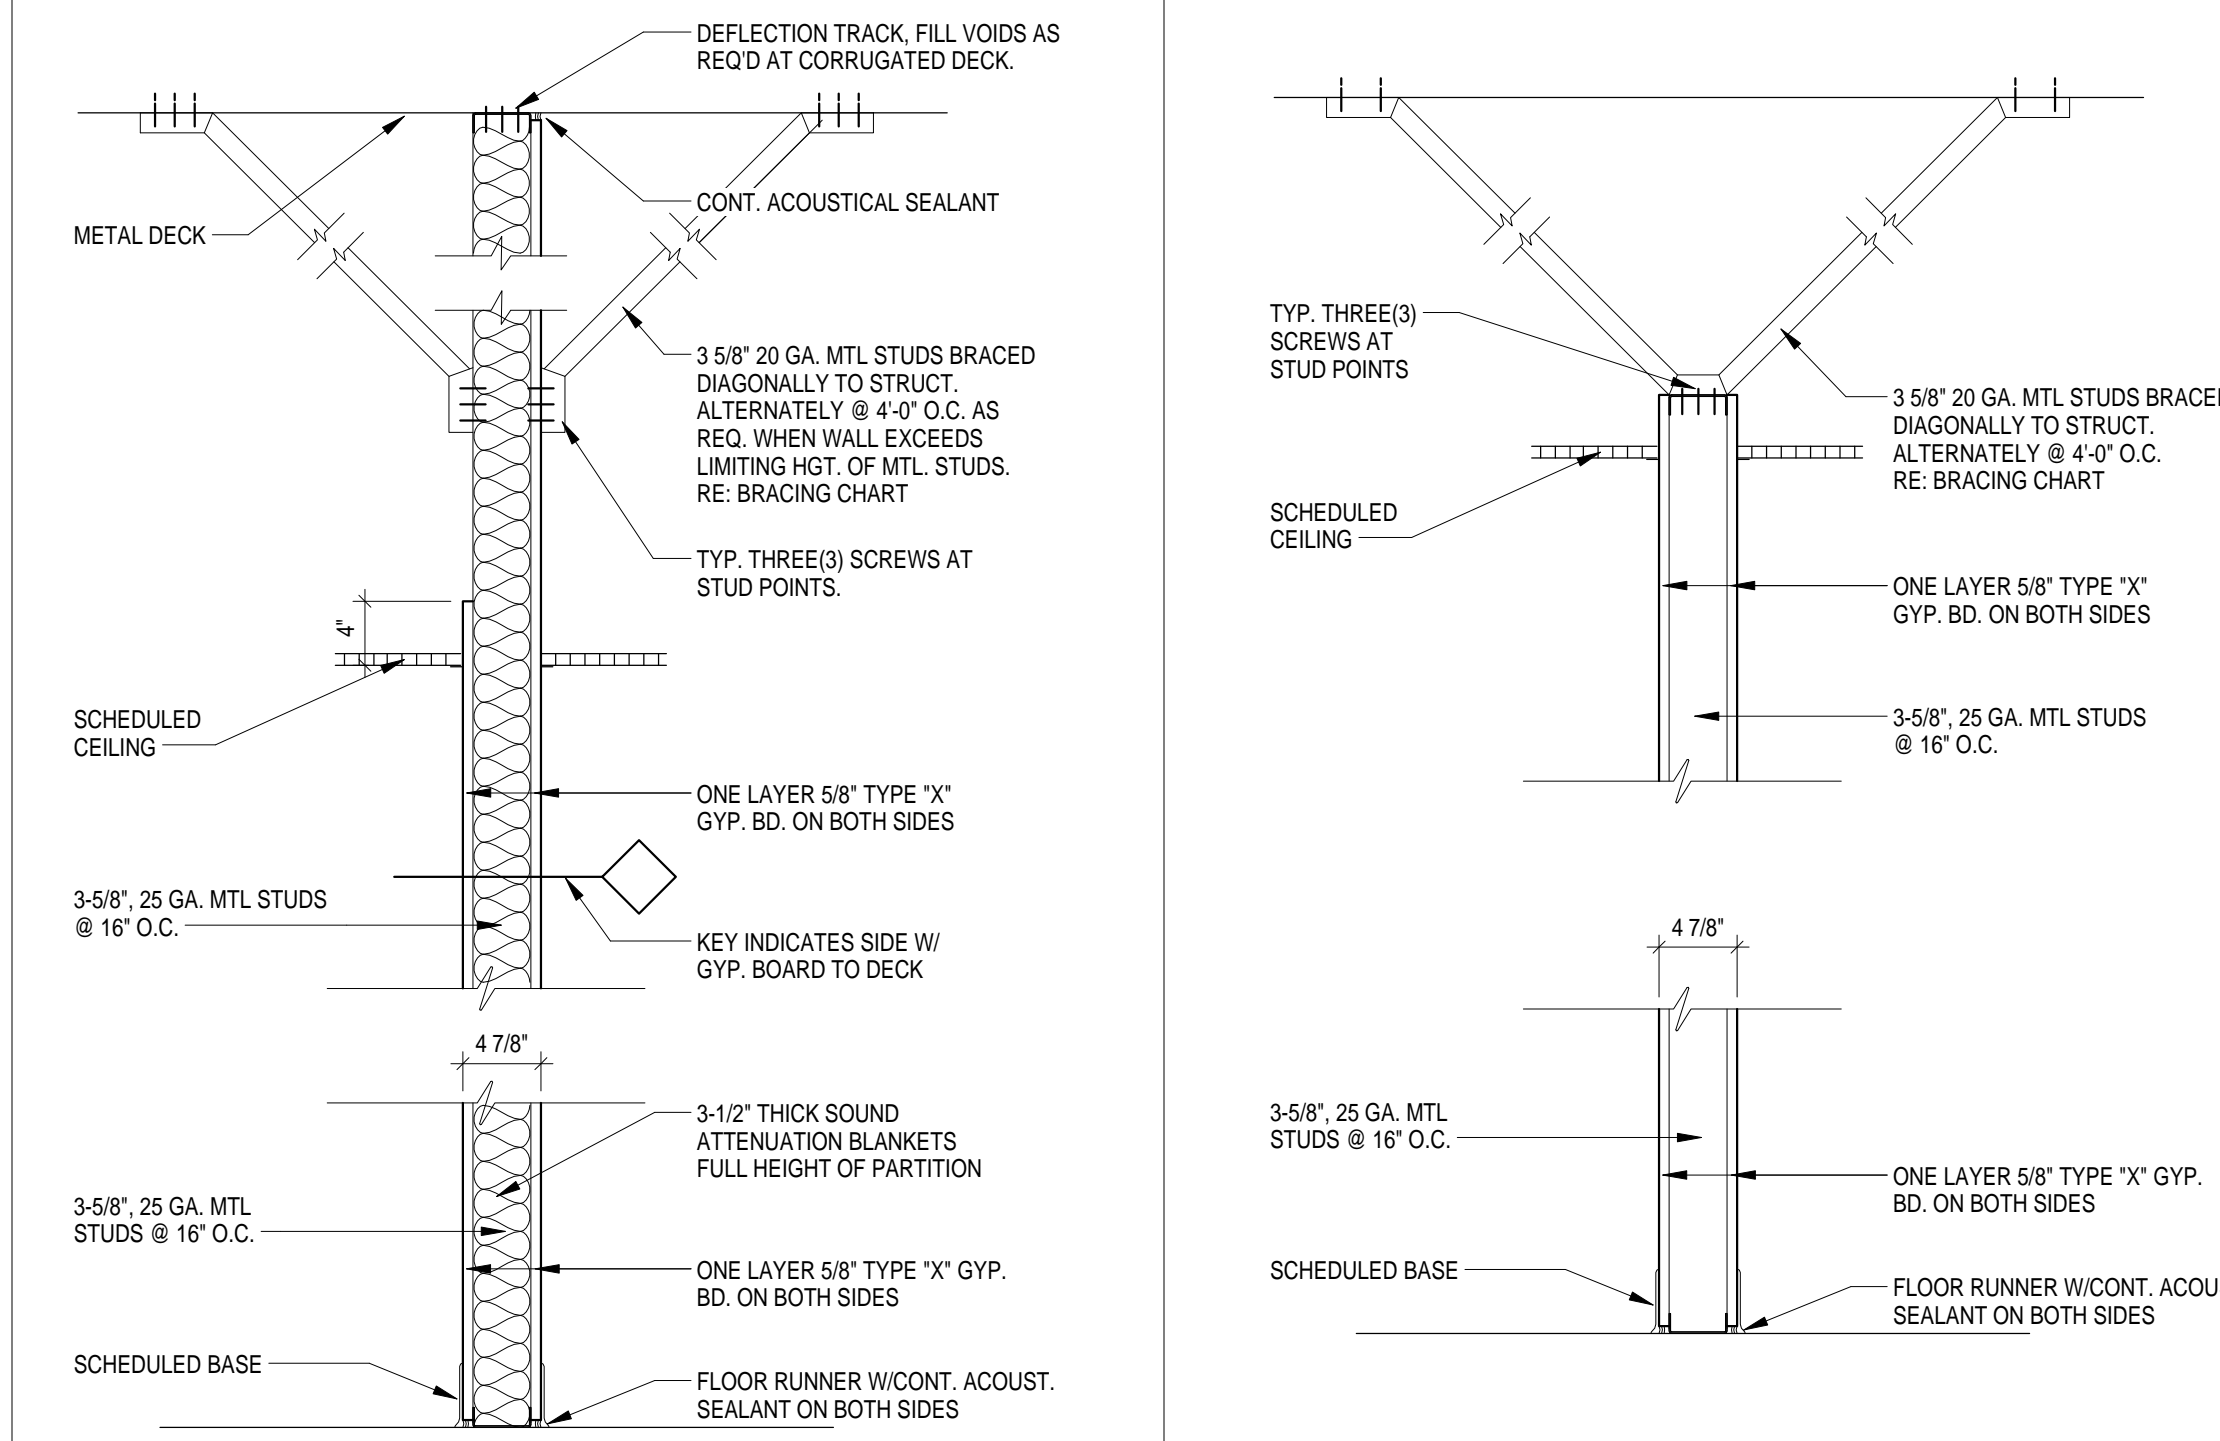


TYPE	FIRE RATG	DESCRIPTION
S1	NONE	W/ 3 1/2" SOUND ATTENUATION INSULATION
S1A	ONE HOUR	W/ 3 1/2" SOUND ATTENUATION INSULATION WITH FIRE RATED CEILING

1 PARTITION TYPE S1
1" = 1'-0"

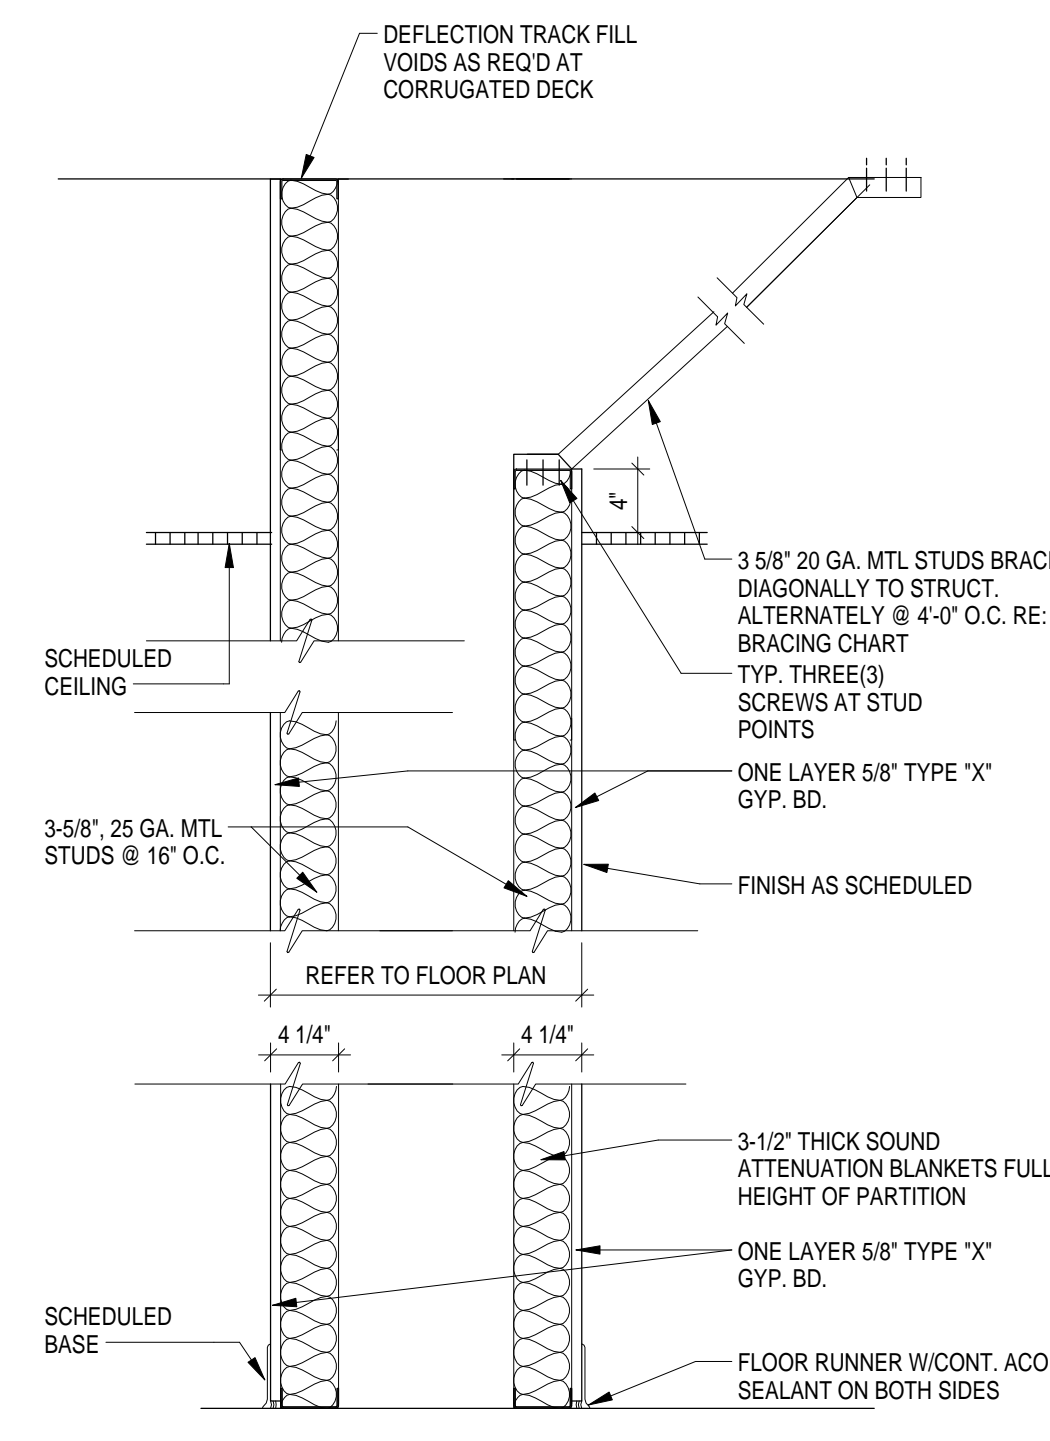

TYPE	FIRE RATG	DESCRIPTION
S3	NONE	3-5/8" METAL STUDS TO DECK
S3A	ONE HOUR	3-5/8" METAL STUDS TO DECK WITH FIRE RATED CEILING


2 PARTITION TYPE S3
1" = 1'-0"

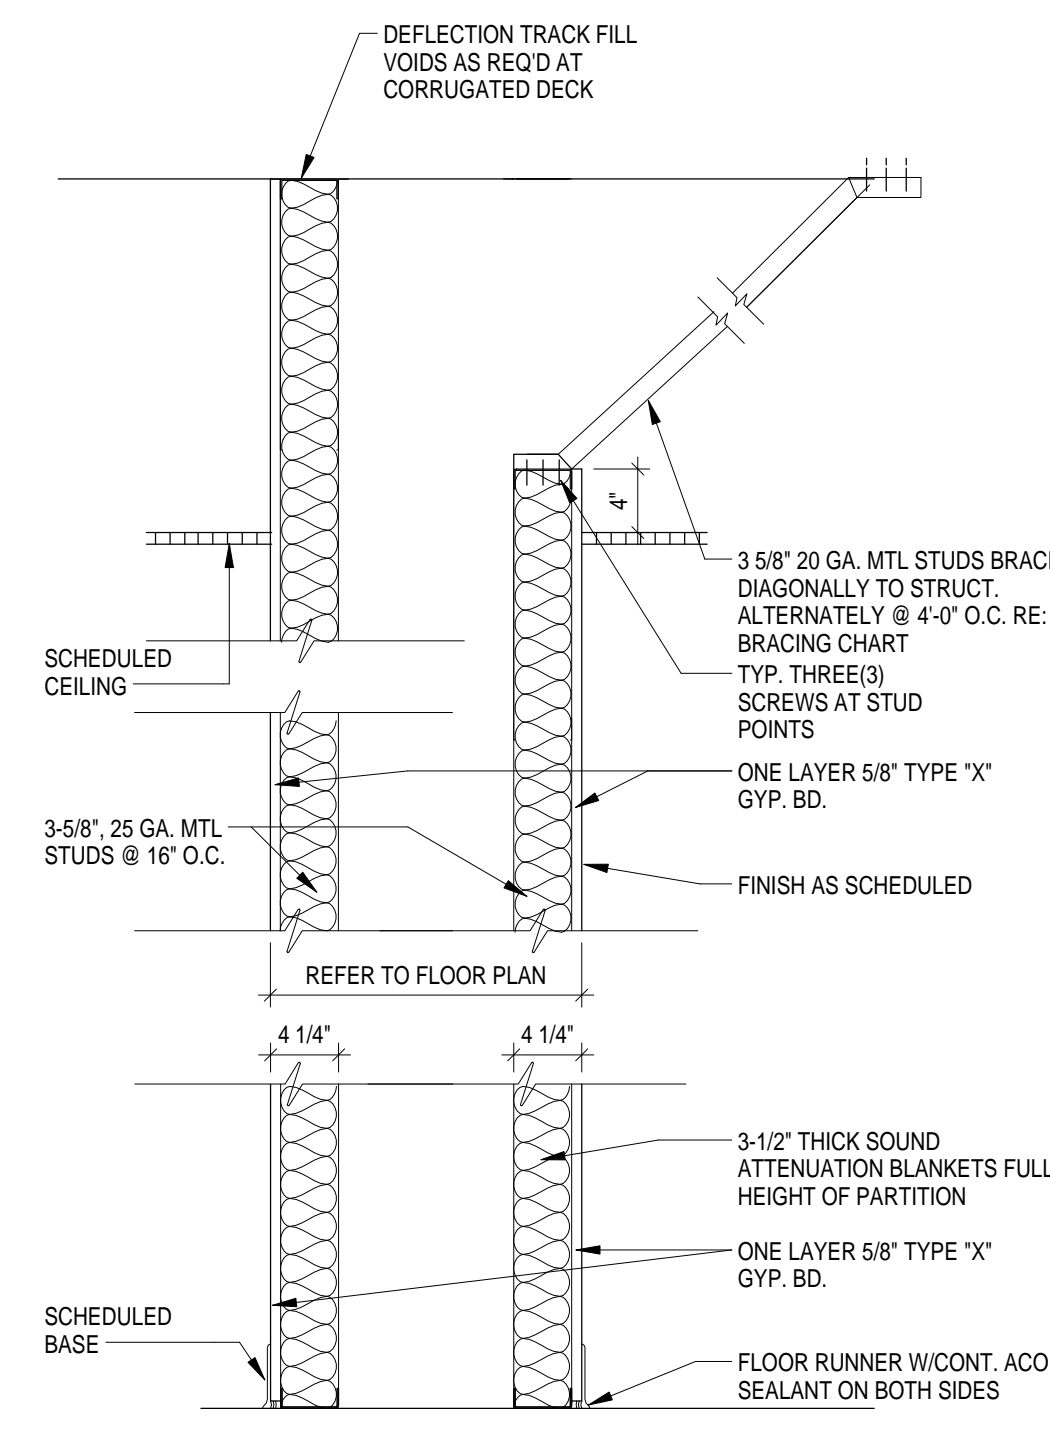


TYPE	FIRE RATG	DESCRIPTION
S5	NONE	3-5/8" MTL. STUD TO DECK ONE SIDE

3 PARTITION TYPE S5
1" = 1'-0"

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATION UNITS: 1C,
 2E, 3B, 3C, 3D & 3E**

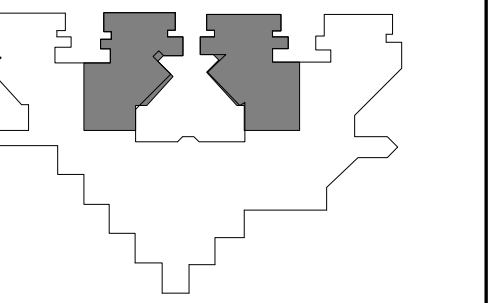

KEY PLAN
 PLAN NORTH
 TRUE NORTH

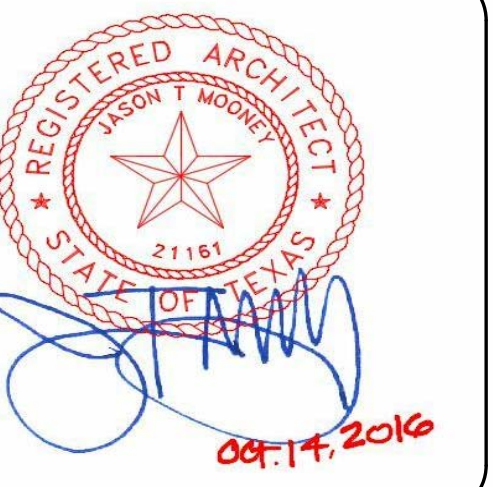


CLIENT	UT HEALTH
PROJECT NUMBER	16106
DATE:	OCTOBER 14, 2016
DRAWN BY:	VG
CHECKED BY:	JM
REVISIONS	

No.	Description	Date


ISSUE FOR BID

MILLWORK SECTIONS


A8.01

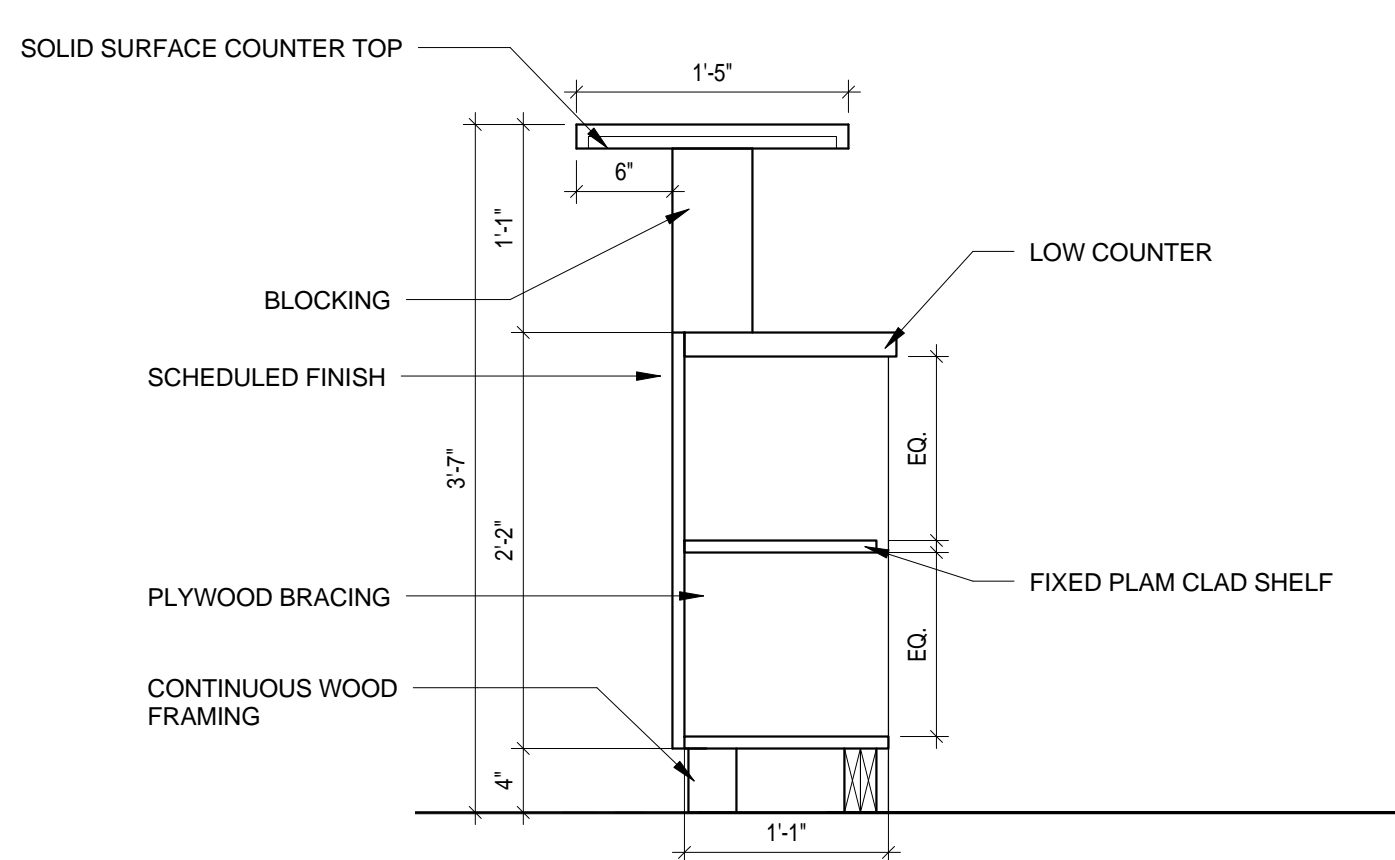

3 MILLWORK SECTION
 1" = 1'-0"

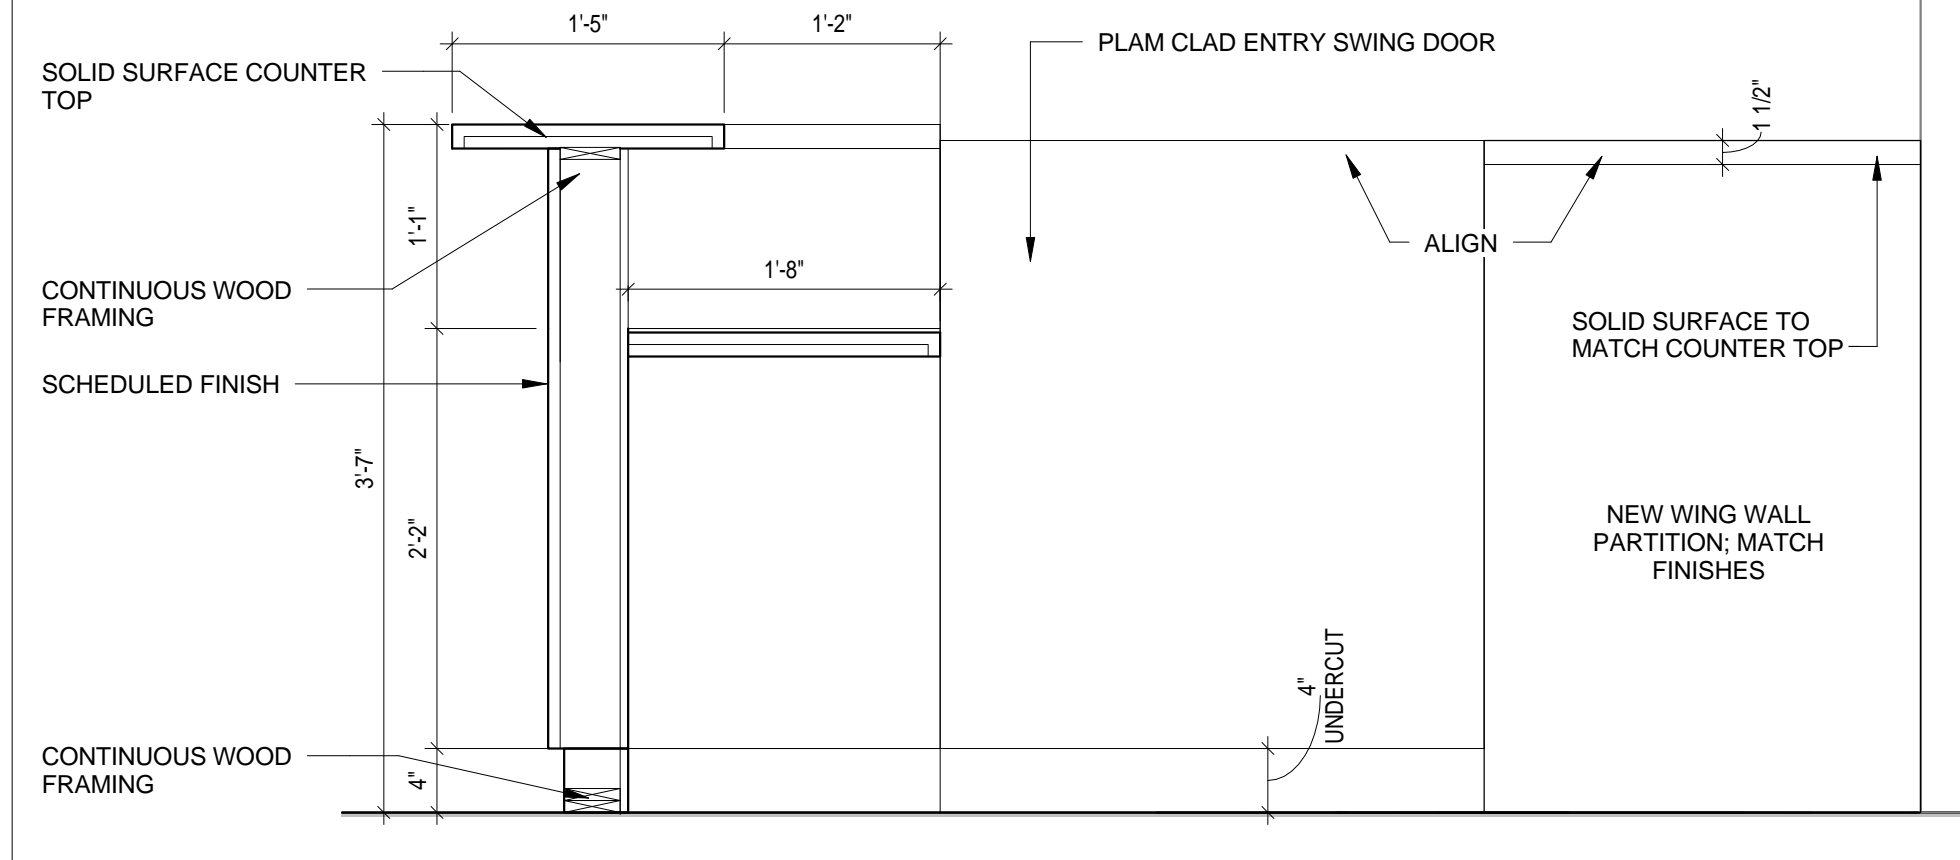

2 MILLWORK SECTION
 1" = 1'-0"

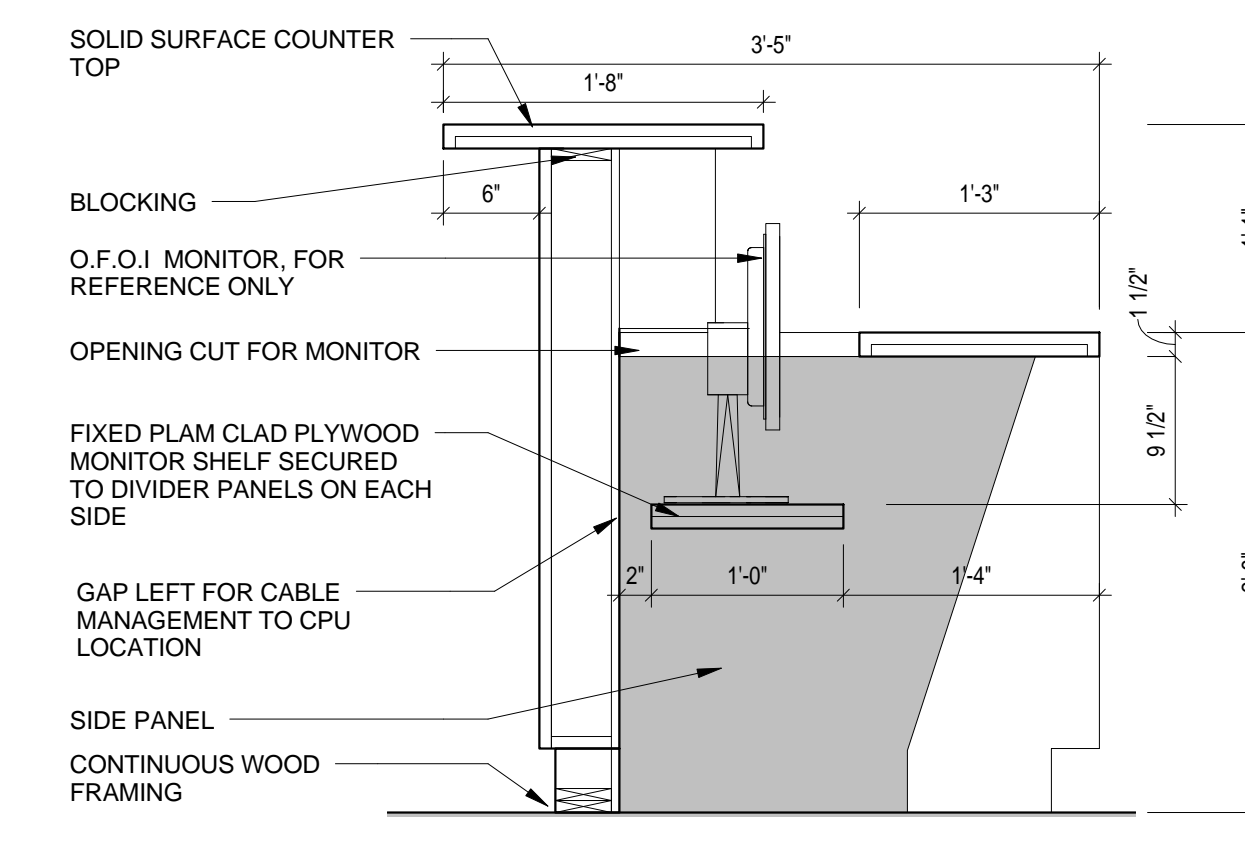

1 MILLWORK SECTION
 1" = 1'-0"

GENERAL REFLECTED CEILING PLAN NOTES


- THE CONTRACTOR SHALL COMPARE THIS REFLECTED CEILING PLAN WITH INDICATED ELECTRICAL LIGHTING PLANS, MECHANICAL SUPPLY, RETURN AND EXHAUST PLANS, MECHANICAL FIXTURES ARE NOT INDICATED ON THIS PLAN, RE: MEP. THE CONTRACTOR SHALL REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.
- SEE ELECTRICAL DRAWINGS FOR THE LOCATIONS OF CEILING MOUNTED SMOKE DETECTORS, PEAKERS, EXIT SIGNAGE AND FIRE ALARM DEVICES, ETC. ALSO SEE ELECTRICAL FOR LOCATIONS OF WALL MOUNTED EXIT LIGHTS.
- SPRINKLER HEADS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. CONTRACTOR TO INSTALL SUFFICIENT HEADS IN ALL SPACES TO PROVIDE 100% COVERAGE AS REQUIRED UNDER NFPA 13 AND OWNERS' INSURANCE COMPANIES REQUIREMENTS. CENTER ALL SPRINKLER HEADS IN CEILING TILES AND GYPSUM BOARD CEILINGS.
- CEILING ACCESS PANELS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. THE CONTRACTOR SHALL VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN NON-ACCESSIBLE TYPE CEILINGS WHERE SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING, OR ELECTRICAL ITEMS MAY BE REQUIRED. ACCESS PANELS SHALL BE EQUAL TO THE RATING OF THE WALL OR CEILING IN WHICH THEY OCCUR.
- 18" MINIMUM VERTICAL CLEARANCE SHALL BE MAINTAINED BETWEEN THE BOTTOM OF THE EXTENDED SPRINKLER HEADS AND THE TOP OF ANY FILES, SHELVING, LOCKERS, ETC.
- PRE-MANUFACTURED SHOWER UNITS ARE PROVIDED WITH LIGHT FIXTURES (RE: ELECTRICAL FOR CONNECTION).
- ALL CEILING ELEMENTS TO BE PLACED IN THE CENTER OF CEILING TILE OR CENTER OF GYP. BOARD CEILING AREA U.N.O.
- ALL CEILING GRIDS TO BE CENTERED BETWEEN WALLS U.N.O.
- V.I.F. CEILING HEIGHT. ALL ACOUSTICAL CEILINGS TO MATCH EXISTING CEILING HEIGHT UNLESS NOTED OTHERWISE.
- SAW CUT AND REMOVE EXISTING SLAB AND FLOOR FINISHES AS REQUIRED TO INSTALL NEW PLUMBING LINES, FLOOR DRAINS, FIXTURES OR ELECTRICAL ITEMS. SPLICE NEW REINFORCING BARS DOWELED INTO EXISTING CONCRETE AND PROVIDE NEW VAPOR RETARDER AND WATERSTOPS. PATCH WITH A MINIMUM OF 300 PSI CONCRETE AFTER INSTALLATION OF UTILITIES AND FIXTURES. PREPARE CONCRETE TO RECEIVE NEW FINISH.
- ALL EXISTING CEILING DEVICES TO REMAIN; COORDINATE REMOVAL AND RE-INSTALLATION WITH OWNER.

GENERAL REFLECTED CEILING PLAN LEGEND

- SUSPENDED 2' X 2' ACOUSTICAL CEILING SYSTEM (APC)
- 2X4 FLORESCENT
- 2X2 FLORESCENT
- 1 x 4 LIGHT FIXTURE
- RECESSED CAN LIGHT FIXTURE
- SUPPLY AIR GRILLE
CLEAN ALL EXISTING GRILLES AT ALL HARD CEILING LOCATIONS; RE-PAINT ALL OTHER EXISTING GRILLES IN LAY-IN CEILING LOCATIONS; G.C. TO FIELD VERIFY
- RETURN AIR GRILLE
CLEAN ALL EXISTING GRILLES AT ALL HARD CEILING LOCATIONS; RE-PAINT ALL OTHER EXISTING GRILLES IN LAY-IN CEILING LOCATIONS; G.C. TO FIELD VERIFY
- CEILING DETAIL TAG
- CEILING TYPE
9'-0" AFF
CEILING HEIGHT DESIGNATION PER AREA
- GYP. BOARD CEILING
- EXIT LIGHT
- ONLY FISK ELECTRIC TO REMOVE EXISTING CAMERAS PRIOR TO DEMOLITION AND STORE DEVICES WITHIN HOURS OR REWOTE LOCATION AS COORDINATED WITH OWNER. FISK ELECTRIC TO REINSTALL CAMERA AND COMPLETION OF PROJECT.
- PROVIDE NEW PATIENT MONITORING CAMERA WHERE SHOWN; COORDINATE FINAL POSITION W/ OWNER. ALTERNATE NO. 1C-04; RE: SPECS
- CURTAIN TRACK MOUNTED TO CEILING AT THIS LOCATION WITH PRIVACY CURTAIN WITH BREAK AWAY MESH
- EXISTING SPEAKER
- EXISTING FIRE SPRINKLER

REFLECTED CEILING PLAN KEY NOTES

- (01) REPAINT EXISTING CEILING;
- (02) PAINT EXISTING CEILING GRID WHITE THROUGHOUT AND PATCH/REPAIR AS NEEDED; REPLACE ALL CEILING TILES
- (03) REPLACE EXISTING LIGHT FIXTURES WITH NEW SCHEDULED FIXTURES; RE: MEP DRAWINGS
- (04) RE-WORK CEILING TILE AND GRID AS NEEDED TO MATCH EXISTING
- (05) RE-LAMP EXISTING FIXTURES AND CLEAN LENSES
- (06) RE-LAMP EXISTING FIXTURES AND CLEAN LENSES; RELOCATE EXISTING FIXTURES CONFLICTING WITH NEW PARTITION
- (07) REPAINT EXISTING CEILING; REFER TO FINISH PLAN (A2.19C - A2.24E) FOR ADDITIONAL INFORMATION; RE-LAMP EXISTING LIGHT FIXTURES AND CLEAN LENSES
- (08) ALTERNATE NO. 1C-04; RE: SPECS

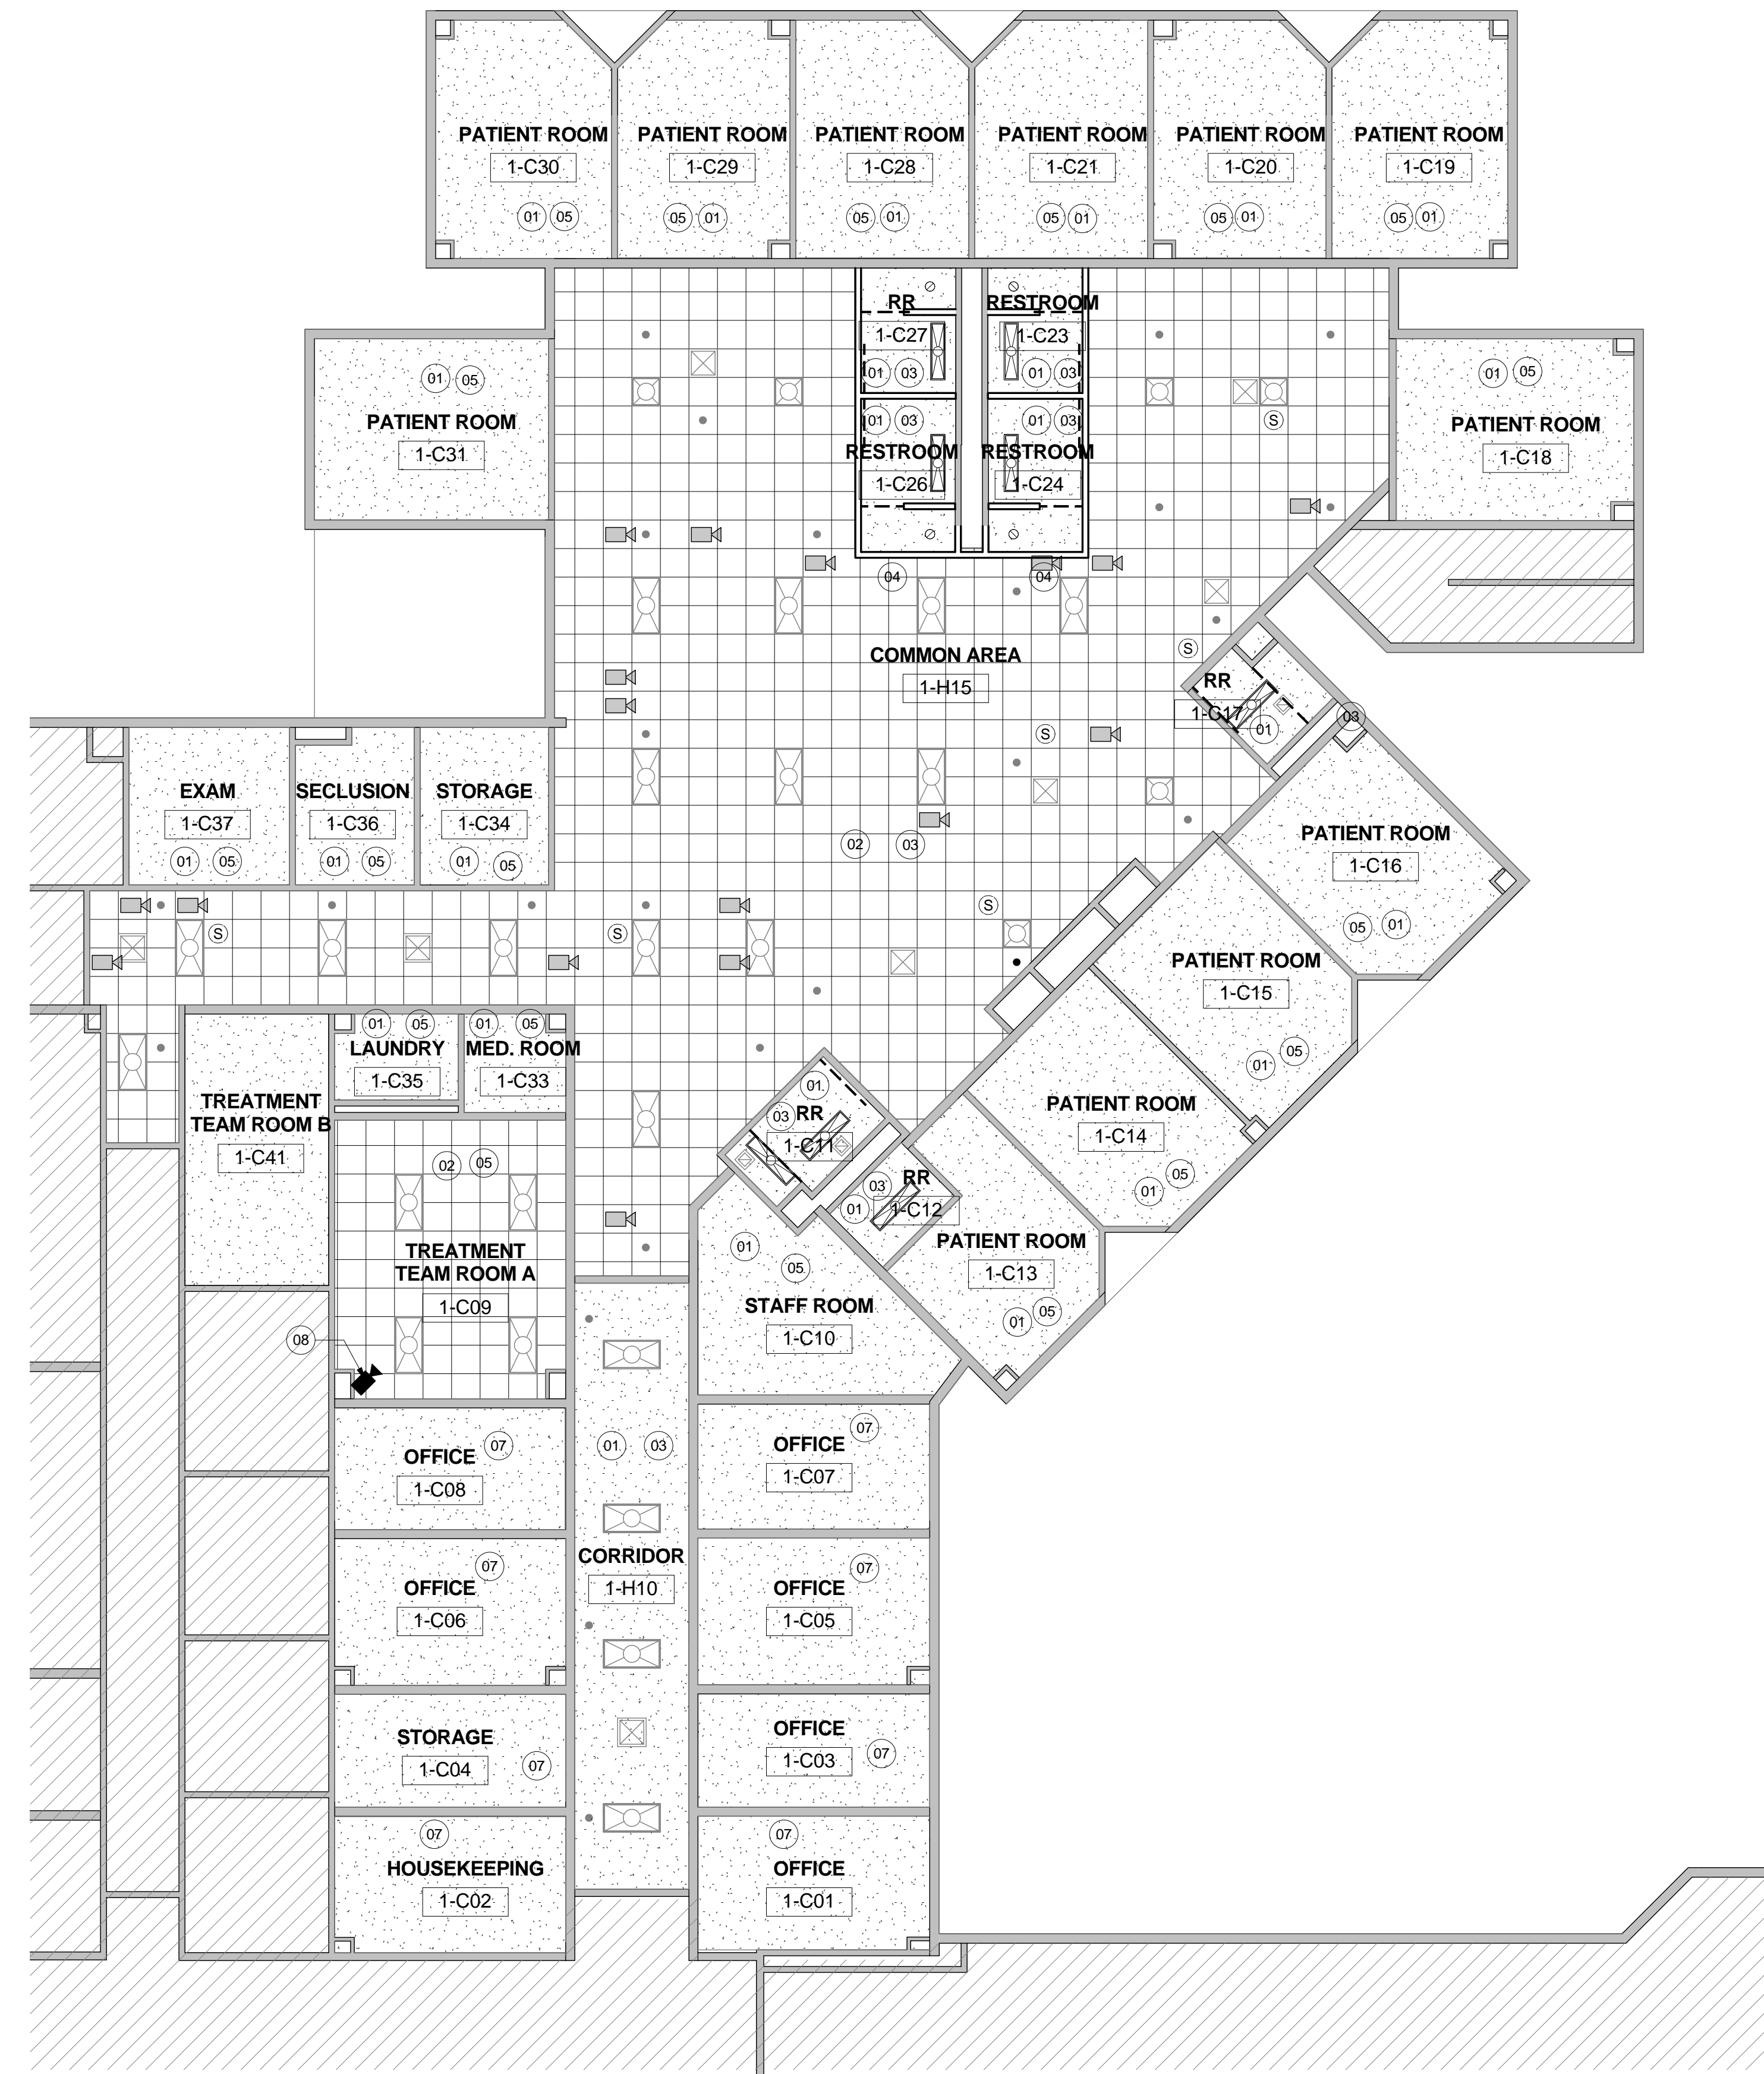

No.	Description	Date

ISSUE FOR BID
**REFLECTED CEILING
 PLAN - UNIT 3E
 THIRD FLOOR**

A10.06

GENERAL REFLECTED CEILING PLAN NOTES


- THE CONTRACTOR SHALL COMPARE THIS REFLECTED CEILING PLAN WITH INDICATED ELECTRICAL LIGHTING PLANS, MECHANICAL SUPPLY, RETURN AND EXHAUST PLANS, MECHANICAL FIXTURES ARE NOT INDICATED ON THIS PLAN, RE: MEP. THE CONTRACTOR SHALL REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.
- SEE ELECTRICAL DRAWINGS FOR THE LOCATIONS OF CEILING MOUNTED SMOKE DETECTORS, PEAKERS, EXIT SIGNAGE AND FIRE ALARM DEVICES, ETC. ALSO SEE ELECTRICAL FOR LOCATIONS OF WALL MOUNTED EXIT LIGHTS.
- SPRINKLER HEADS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. CONTRACTOR TO INSTALL SUFFICIENT HEADS IN ALL SPACES TO PROVIDE 100% COVERAGE AS REQUIRED UNDER NFPA 13 AND OWNERS' INSURANCE COMPANIES' REQUIREMENTS. CENTER ALL SPRINKLER HEADS IN CEILING TILES AND GYPSUM BOARD CEILINGS.
- CEILING ACCESS PANELS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. THE CONTRACTOR SHALL VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN NON-ACCESSIBLE TYPE CEILINGS WHERE SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING, OR ELECTRICAL ITEMS MAY BE REQUIRED. ACCESS PANELS SHALL BE EQUAL TO THE RATING OF THE WALL OR CEILING IN WHICH THEY OCCUR.
- 18" MINIMUM VERTICAL CLEARANCE SHALL BE MAINTAINED BETWEEN THE BOTTOM OF THE EXTENDED SPRINKLER HEADS AND THE TOP OF ANY FILES, SHELVING, LOCKERS, ETC.
- PRE-MANUFACTURED SHOWER UNITS ARE PROVIDED WITH LIGHT FIXTURES (RE: ELECTRICAL FOR BOARD CEILING AREA U.N.O.)
- ALL CEILING ELEMENTS TO BE PLACED IN THE CENTER OF CEILING TILE OR CENTER OF GYP. BOARD CEILING AREA U.N.O.
- ALL CEILING GRIDS TO BE CENTERED BETWEEN WALLS U.N.O.
- V.I.F. CEILING HEIGHT. ALL ACOUSTICAL CEILINGS TO MATCH EXISTING CEILING HEIGHT UNLESS NOTED OTHERWISE.
- SAW CUT AND REMOVE EXISTING SLAB AND FLOOR FINISHES AS REQUIRED TO INSTALL NEW PLUMBING LINES, FLOOR DRAINS, FIXTURES OR ELECTRICAL ITEMS. SPLICE NEW REINFORCING BARS DOWELED INTO EXISTING CONCRETE AND PROVIDE NEW VAPOR RETARDER AND WATERSTOPS. PATCH WITH A MINIMUM OF 300 PSI CONCRETE AFTER INSTALLATION OF UTILITIES AND FIXTURES. PREPARE CONCRETE TO RECEIVE NEW FINISH.
- ALL EXISTING CEILING DEVICES TO REMAIN; COORDINATE REMOVAL AND RE-INSTALLATION WITH OWNER.

GENERAL REFLECTED CEILING PLAN LEGEND


- SUSPENDED 2' X 2' ACOUSTICAL CEILING SYSTEM (APC)
- 2X4 FLORESCENT
- 2X2 FLORESCENT
- 1 x 4 LIGHT FIXTURE
- RECESSED CAN LIGHT FIXTURE
- SUPPLY AIR GRILLE
CLEAN ALL EXISTING GRILLES AT ALL HARD CEILING LOCATIONS; RE-PAINT ALL OTHER EXISTING GRILLES IN LAY-IN CEILING LOCATIONS; G.C. TO FIELD VERIFY
- RETURN AIR GRILLE
CLEAN ALL EXISTING GRILLES AT ALL HARD CEILING LOCATIONS; RE-PAINT ALL OTHER EXISTING GRILLES IN LAY-IN CEILING LOCATIONS; G.C. TO FIELD VERIFY
- CEILING DETAIL TAG
- CEILING TYPE
9'-0" AFF
- GYP. BOARD CEILING
- EXIT LIGHT
- ONLY FISK ELECTRIC TO REMOVE EXISTING CAMERAS PRIOR TO DEMOLITION AND STORE DEVICES WITHIN HCPC OR REMOVE LOCATION AS COORDINATED WITH OWNER. FISK ELECTRIC TO REINSTALL CAMERA AND COMPLETION OF PROJECT.
- PROVIDE NEW PATIENT MONITORING CAMERA WHERE SHOWN. COORDINATE FINAL POSITION W/ OWNER. ALTERNATE NO. 3E-04; RE: SPECS
- CURTAIN TRACK MOUNTED TO CEILING AT THIS LOCATION WITH PRIVACY CURTAIN WITH BREAK AWAY MESH
- EXISTING SPEAKER
- EXISTING FIRE SPRINKLER

REFLECTED CEILING PLAN KEY NOTES

- 01 REPAINT EXISTING CEILING;
- 02 PAINT EXISTING CEILING GRID WHITE THROUGHOUT AND PATCH/REPAIR AS NEEDED; REPLACE ALL CEILING TILES
- 03 REPLACE EXISTING LIGHT FIXTURES WITH NEW SCHEDULED FIXTURES; RE: MEP DRAWINGS
- 04 RE-WORK CEILING TILE AND GRID AS NEEDED TO MATCH EXISTING
- 05 RE-LAMP EXISTING FIXTURES AND CLEAN LENSES
- 06 RE-LAMP EXISTING FIXTURES AND CLEAN LENSES; RELOCATE EXISTING FIXTURES CONFLICTING WITH NEW PARTITION
- 07 REPAINT EXISTING CEILING; REFER TO FINISH PLAN (A2.19C - A2.24E) FOR ADDITIONAL INFORMATION; RE-LAMP EXISTING LIGHT FIXTURES AND CLEAN LENSES
- 08 ALTERNATE NO. 3E-04; RE: SPECS

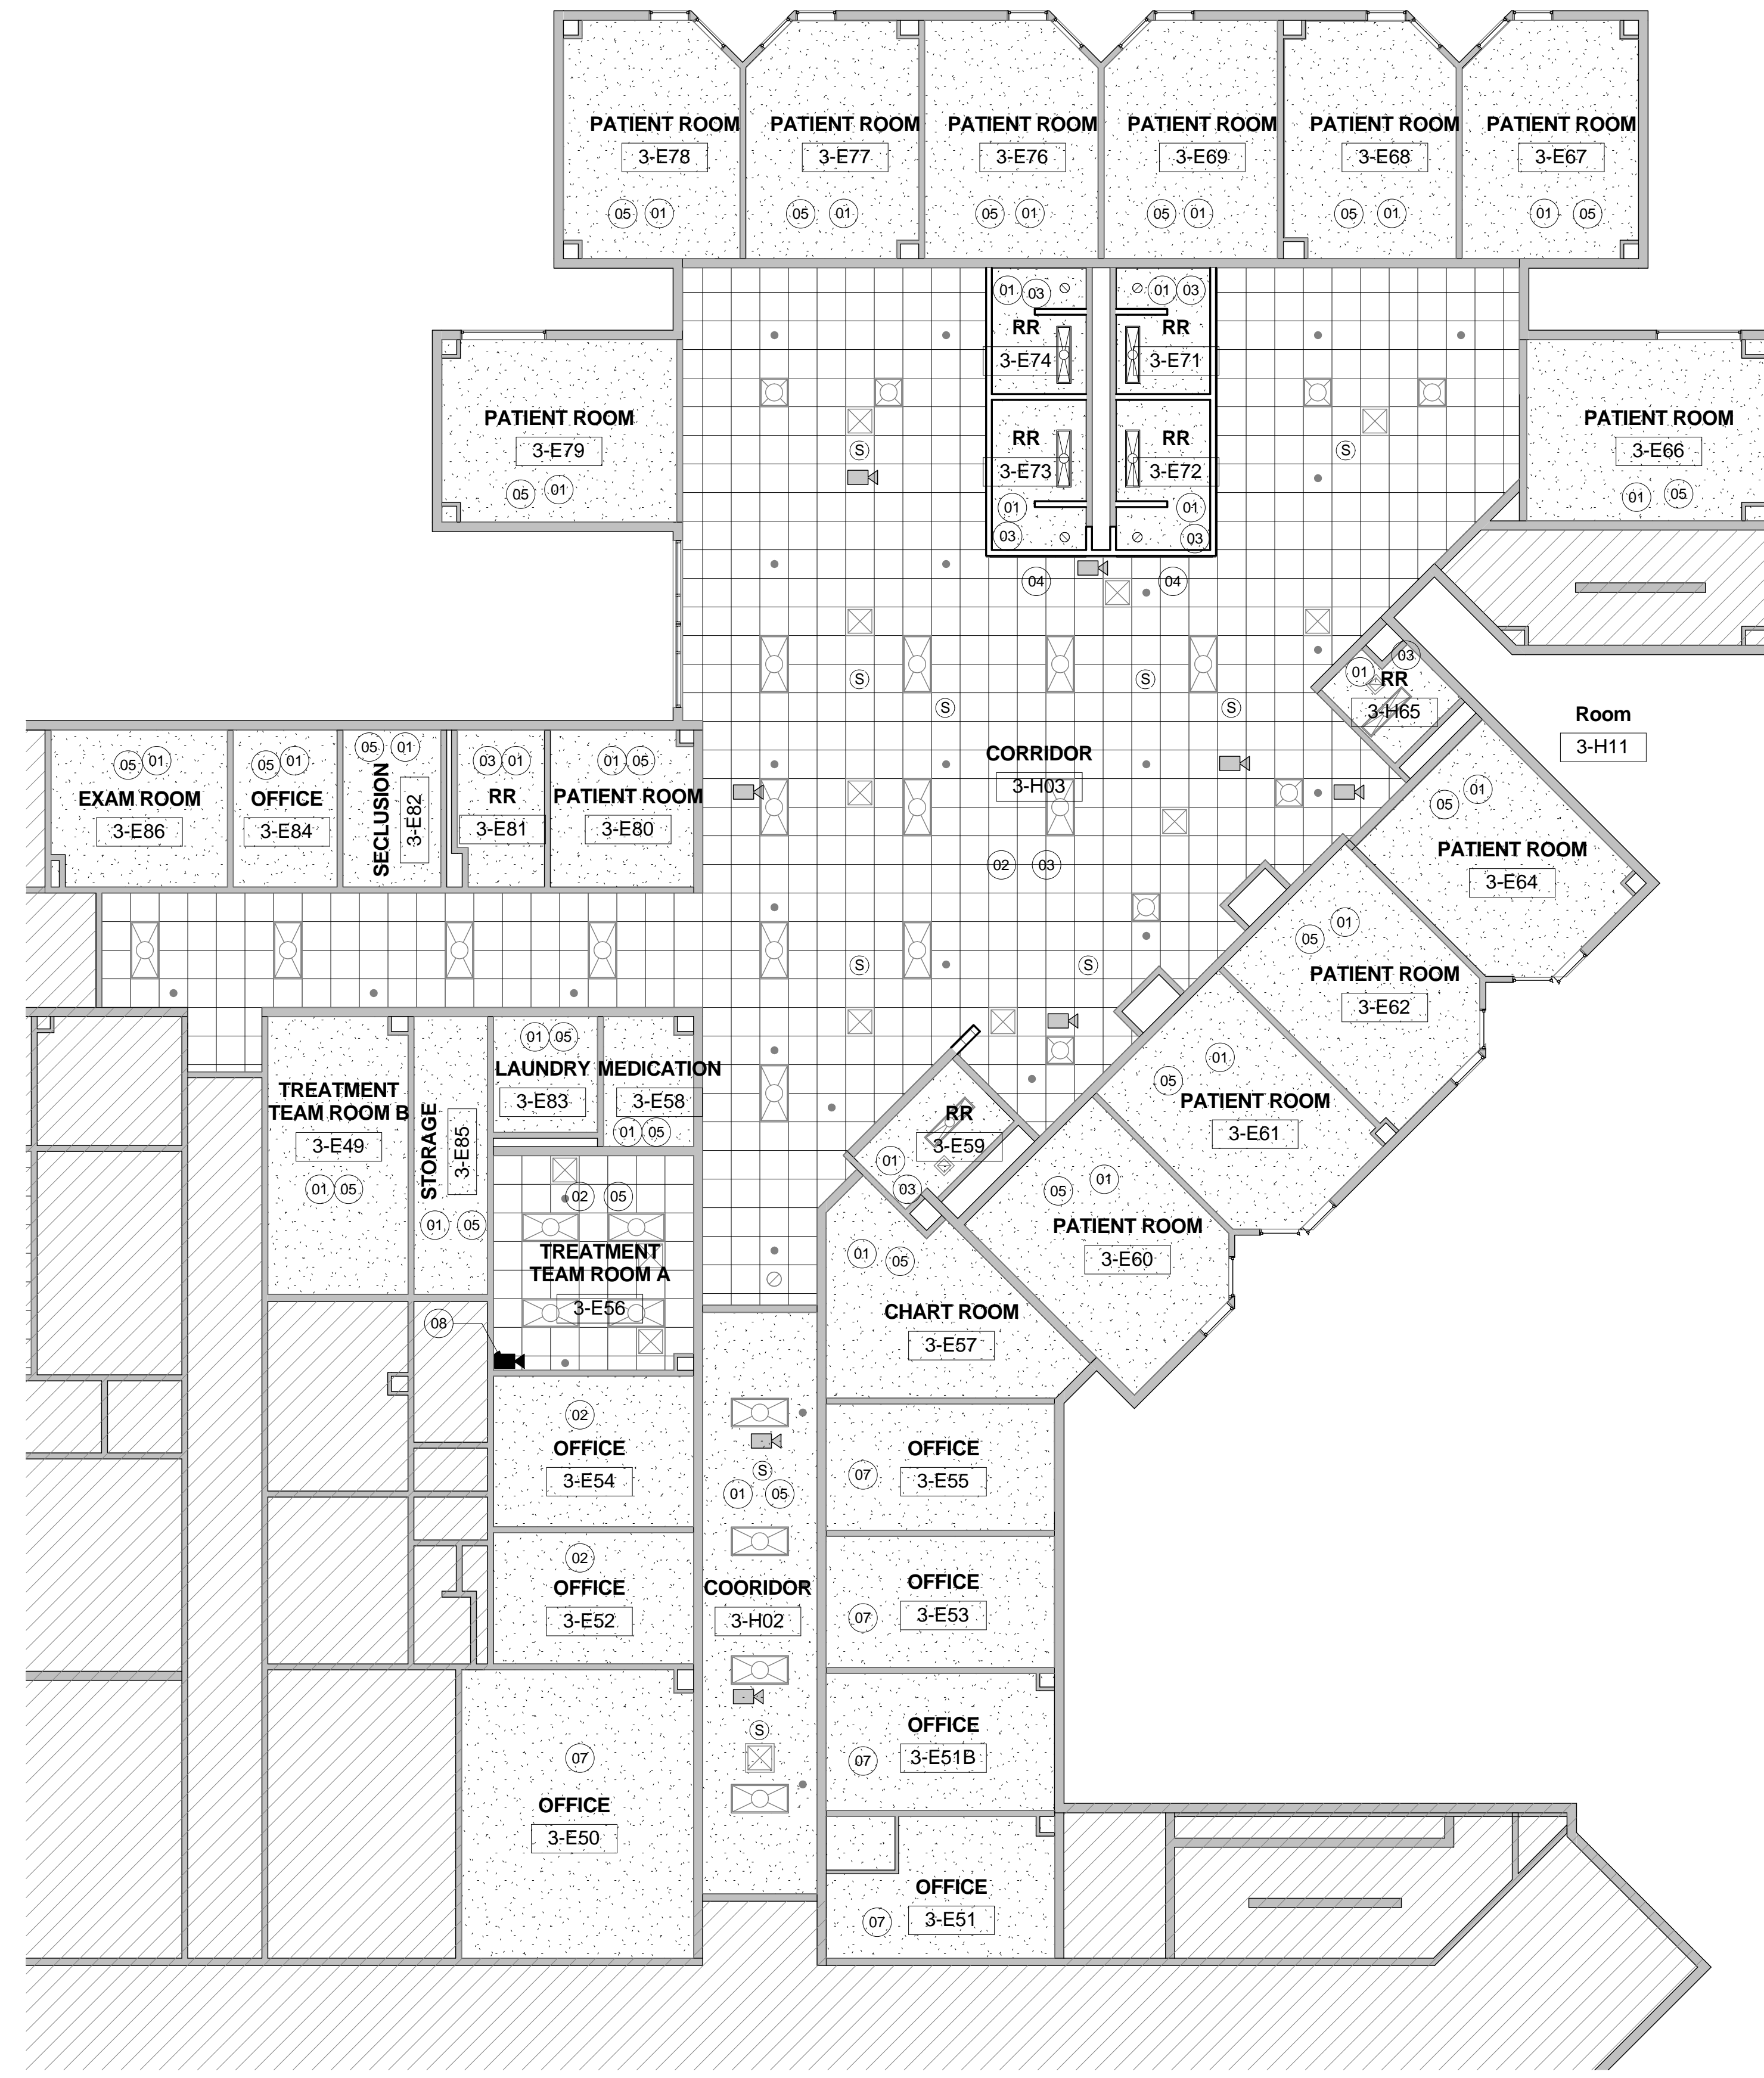

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATIONS UNITS 1C,
 2E, 3B, 3C, 3D & 3E**

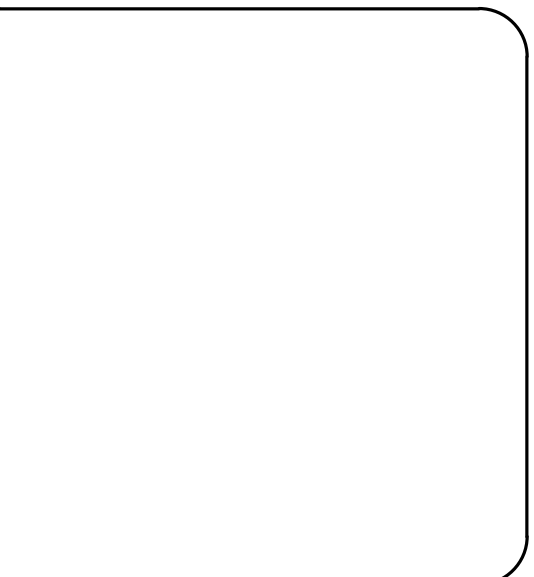

CLIENT UT HEALTH		
PROJECT NUMBER 16103		
DATE:	10/14/2016	
DRAWN BY:	FL	
CHECKED BY:	JRR	
REVISIONS		
No.	Description	Date

Issue for Bid
LUMINAIRE SCHEDULE

E0.02

LUMINAIRE SCHEDULE							
TYPE	MANUFACTURER AND CATALOG NUMBER	DESCRIPTION	VOLTAGE	LAMPS	MOUNTING	MAX WATTS	REMARKS
B	DMF LIGHTING #DHF-132-ICAT-E-D622	COMPACT FLUORESCENT LENSED DOWNLIGHT WITH VANDAL RESISTANT HARDWARE AND FRESNEL LENS	277	1-32W TRT 4100K 82 CRI	RECESSED	35	ONE 1-LAMP PROGRAMMED START ELECTRONIC BALLAST, <10% THD; CONTRACTOR TO MODIFY TO TAMPER RESISTANT HARDWARE ON LENS
D	COLUMBIA #ST814-232F-FSA19-EU	1'X4' FLUORESCENT LENSED FLANGED TROFFER WITH TAMPER RESISTANT HARDWARE, <10% THD, HPF	277	2-32W T8 4100K 85 CRI	RECESSED	64	ONE 2-LAMP PROGRAMMED START ELECTRONIC BALLAST, <10% THD; CONTRACTOR TO MODIFY TO TAMPER RESISTANT HARDWARE ON LENS
XA	CHLORIDE #CA6-RW-1-CEILING RECESS MOUNT	SINGLE FACE EDGE LIT EXIT SIGN WITH RECESSED ALUMINUM HOUSING	120/277	LED	WALL OR CEILING	5	UNSWITCHED, NO BATTERY BACKUP
XB	CHLORIDE #CA6-RW-2-CEILING RECESS MOUNT	DOUBLE FACE EDGE LIT EXIT SIGN WITH RECESSED ALUMINUM HOUSING	120/277	LED	WALL OR CEILING	5	UNSWITCHED, NO BATTERY BACKUP.

CLIENT	UT HEALTH	
PROJECT NUMBER	16103	
DATE:	10/14/2016	
DRAWN BY:	FL	
CHECKED BY:	JRR	
REVISIONS		
No.	Description	Date

Issue for Bid
**LEVEL 01 LIGHTING
PLAN - AREA 1C**

E1.01C

GENERAL NOTES - GE1.01C

- A SEE SHEET E0.01 FOR ELECTRICAL LEGEND, SYMBOLS AND ABBREVIATIONS. COORDINATE WITH ARCHITECT FOR FINAL LUMINAIRE LOCATIONS.
- B ALL EMERGENCY LUMINAIRES AND EXIT LIGHTS ARE TO REMAIN UNSWITCHED, UON.
- C LIGHTED EXIT SIGNS ARE SHOWN FOR QUANTITIES AND GENERAL LOCATIONS. COORDINATE WITH ARCHITECT FOR EXACT LOCATION OF LIGHTED EXIT SIGNS.
- D SINGLE-FACE EXIT SIGNS ARE TYPE XA, UON. DOUBLE-FACE SIGNS ARE TYPE XB, UON.
- E COORDINATE ELECTRICAL WORK WITH ARCHITECTURAL, CIVIL, STRUCTURAL, MECHANICAL, AND PLUMBING SO AS TO AVOID INTERFERENCE WITH OR COMPROMISE OF OTHER SYSTEMS.
- F ALL RECEPTACLES ARE MOUNTED 18" UON. VERIFY HEIGHT AND ALIGNMENT OF DEVICES WITH ARCHITECTURAL DRAWINGS. COORDINATE OUTLET/RECEPTACLE LOCATIONS WITH MILL WORK, CASEWORK, ETC.
- G UPDATE PANELBOARD SCHEDULES UPON COMPLETION OF PROJECT TO REFLECT FINAL CIRCUIT NUMBERS AND DESCRIPTIONS.
- H PROVIDE FIRE ALARM SYSTEM IN COMPLIANCE WITH NFPA 72 FIRE ALARM CODE AND NFPA 101 LIFE SAFETY CODE AND SECTIONS 28 31 00.
- I INSTALL FA NOTIFICATION DEVICES PER NFPA 72. MOUNT VISUAL & COMBINATION NOTIFICATION DEVICES IN CEILING PREFERABLY OR WALL WITH ENTIRE LENS BETWEEN 80" & 96" AFF. SEE ELECTRICAL DETAILS.
- J COORDINATE DETECTORS AND DEVICE LOCATIONS IN FINISHED SPACES WITH ARCHITECTURAL REFLECTED CEILING PLAN (RCP). RELOCATE FIRE ALARM DETECTORS AND DEVICES TO RESOLVE INTERFERENCE AND CONFLICTS. FINAL LOCATION SHALL CONFORM TO NFPA 72 AND UL REQUIREMENTS.


KEYED NOTES - E1.01C

- 1 EXISTING LIGHTING IN THIS SPACE TO REMAIN. CLEAN ALL LENSES AND RELAMP FIXTURE.
- 2 EXISTING LIGHTING IN THIS SPACE TO BE DEMOLISHED. RECONNECT NEW LIGHTING IN DETAIL 2. THIS SHEET TO EXISTING CIRCUIT SERVING LIGHTING IN THE RESTROOM AREA.
- 3 CONNECT RESTROOM LIGHTING TO EXISTING CRITICAL BRANCH POWER CIRCUIT SERVING THIS SPACE. CONNECT TO NEW OR EXISTING SNAP SWITCH FOR CONTROL OF LIGHTING IN EACH SPACE.
- 4 EXISTING ELECTRICAL ROOM.
- 5 CONNECT TO SPARE CIRCUIT BREAKER IN PANEL 1LHCC IN ELECTRICAL ROOM NOTED IN NOTE 4 WITH 2#12, #12G, 3/4"C. THIS WORK IS INCLUDED IN ALTERNATE 1C-02.
- 6 CONNECT TO EXISTING CIRCUIT SERVING POWER TO NURSE STATION.



1 FIRST FLOOR LIGHTING DEMO PLAN - AREA C
1/8" = 1'-0"

2 FIRST FLOOR LIGHTING AREA C
1/8" = 1'-0"

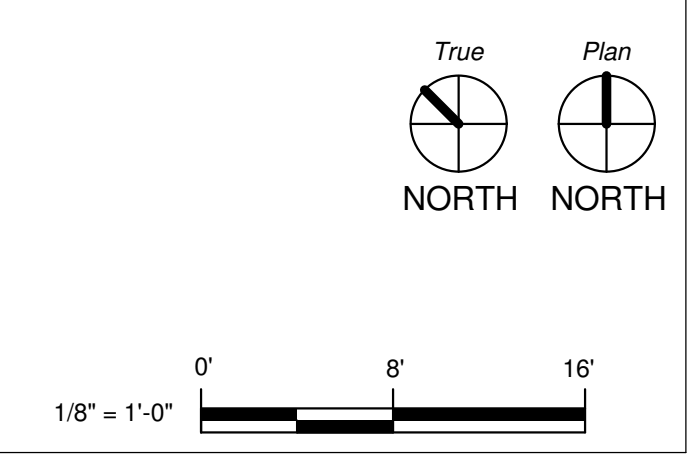


GENERAL NOTES - GE1.02E

- A SEE SHEET E0.01 FOR ELECTRICAL LEGEND, SYMBOLS AND ABBREVIATIONS. COORDINATE WITH ARCHITECT FOR FINAL LUMINAIRE LOCATIONS.
- B ALL EMERGENCY LUMINAIRES AND EXIT LIGHTS ARE TO REMAIN UNSWITCHED, UON.
- C LIGHTED EXIT SIGNS ARE SHOWN FOR QUANTITIES AND GENERAL LOCATIONS. COORDINATE WITH ARCHITECT FOR EXACT LOCATION OF LIGHTED EXIT SIGNS.
- D SINGLE-FACE EXIT SIGNS ARE TYPE XA, UON. DOUBLE-FACE SIGNS ARE TYPE XB, UON.
- E COORDINATE ELECTRICAL WORK WITH ARCHITECTURAL, CIVIL, STRUCTURAL, MECHANICAL, AND PLUMBING SO AS TO AVOID INTERFERENCE WITH OR COMPROMISE OF OTHER SYSTEMS.
- F ALL RECEPTACLES ARE MOUNTED 18" UON. VERIFY HEIGHT AND ALIGNMENT OF DEVICES WITH ARCHITECTURAL DRAWINGS. COORDINATE OUTLET/RECEPTACLE LOCATIONS WITH MILL WORK, CASEWORK, ETC.
- G UPDATE PANELBOARD SCHEDULES UPON COMPLETION OF PROJECT TO REFLECT FINAL CIRCUIT NUMBERS AND DESCRIPTIONS.
- H PROVIDE FIRE ALARM SYSTEM IN COMPLIANCE WITH NFPA 72 FIRE ALARM CODE AND NFPA 101 LIFE SAFETY CODE AND SECTIONS 28 31 00.
- I INSTALL FA NOTIFICATION DEVICES PER NFPA 72. MOUNT VISUAL & COMBINATION NOTIFICATION DEVICES IN CEILING PREFERABLY OR WALL WITH ENTIRE LENS BETWEEN 80" & 96" AFF. SEE ELECTRICAL DETAILS.
- J COORDINATE DETECTORS AND DEVICE LOCATIONS IN FINISHED SPACES WITH ARCHITECTURAL REFLECTED CEILING PLAN (RCP). RELOCATE FIRE ALARM DETECTORS AND DEVICES TO RESOLVE INTERFERENCE AND CONFLICTS. FINAL LOCATION SHALL CONFORM TO NFPA 72 AND UL REQUIREMENTS.

KEYED NOTES - E1.02E

- 1 EXISTING LIGHTING IN THIS SPACE TO REMAIN. CLEAN ALL LENSES AND RELAMP FIXTURE.
- 2 EXISTING LIGHTING IN THIS SPACE TO BE DEMOLISHED. RECONNECT NEW LIGHTING IN DETAIL 2. THIS SHEET TO EXISTING CIRCUIT SERVING LIGHTING IN THE RESTROOM AREA.
- 3 CONNECT RESTROOM LIGHTING TO EXISTING CRITICAL BRANCH POWER CIRCUIT SERVING THIS SPACE. CONNECT TO NEW OR EXISTING SNAP SWITCH FOR CONTROL OF LIGHTING IN EACH SPACE.
- 4 EXISTING ELECTRICAL ROOM.
- 5 CONNECT TO SPARE CIRCUIT BREAKER IN PANEL 2LSTA OR 2LSTB IN ELECTRICAL ROOM NOTED IN NOTE 4 WITH 2#12, #12S, 3/4" C. THIS WORK IS INCLUDED IN ALTERNATE 2E-02.
- 6 CONNECT TO EXISTING CIRCUIT SERVING POWER TO NURSE STATION.

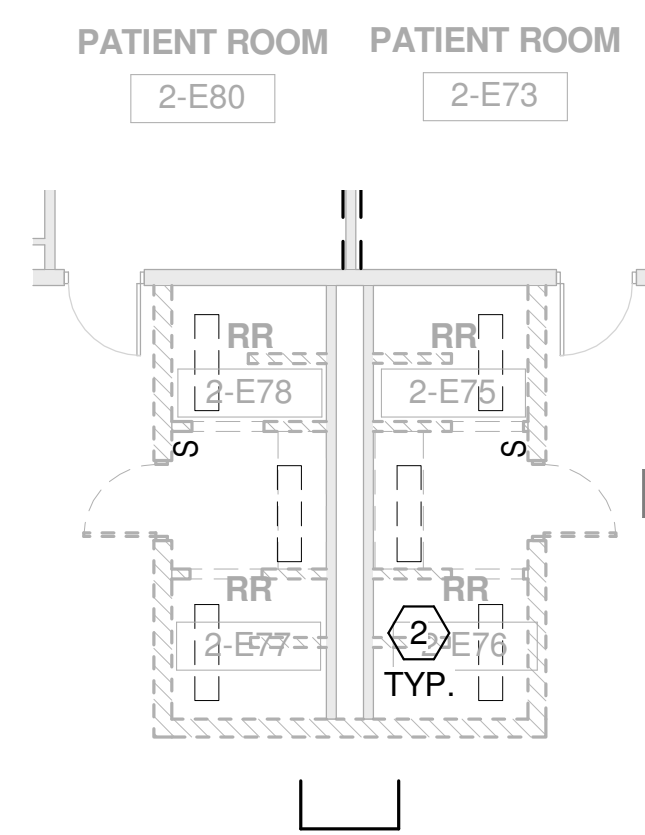


SECOND FLOOR LIGHTING DEMO PLAN - AREA E

1
1/8" = 1'-0"



2 SECOND FLOOR LIGHTING AREA E

1/8" = 1'-0"

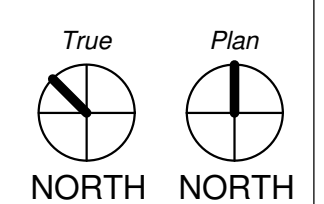

1/8" = 1'-0"

GENERAL NOTES - GE1.03D

- A SEE SHEET E0.01 FOR ELECTRICAL LEGEND, SYMBOLS AND ABBREVIATIONS. COORDINATE WITH ARCHITECT FOR FINAL LUMINAIRE LOCATIONS.
- B ALL EMERGENCY LUMINAIRES AND EXIT LIGHTS ARE TO REMAIN UNSWITCHED, UON.
- C LIGHTED EXIT SIGNS ARE SHOWN FOR QUANTITIES AND GENERAL LOCATIONS. COORDINATE WITH ARCHITECT FOR EXACT LOCATION OF LIGHTED EXIT SIGNS.
- D SINGLE-FACE EXIT SIGNS ARE TYPE XA, UON. DOUBLE-FACE SIGNS ARE TYPE XB, UON.
- E COORDINATE ELECTRICAL WORK WITH ARCHITECTURAL, CIVIL, STRUCTURAL, MECHANICAL, AND PLUMBING SO AS TO AVOID INTERFERENCE WITH OR COMPROMISE OF OTHER SYSTEMS.
- F ALL RECEPTACLES ARE MOUNTED 18" UON. VERIFY HEIGHT AND ALIGNMENT OF DEVICES WITH ARCHITECTURAL DRAWINGS. COORDINATE OUTLET/RECEPTACLE LOCATIONS WITH MILL WORK, CASEWORK, ETC.
- G UPDATE PANELBOARD SCHEDULES UPON COMPLETION OF PROJECT TO REFLECT FINAL CIRCUIT NUMBERS AND DESCRIPTIONS.
- H PROVIDE FIRE ALARM SYSTEM IN COMPLIANCE WITH NFPA 72 FIRE ALARM CODE AND NFPA 101 LIFE SAFETY CODE AND SECTIONS 28 31 00.
- I INSTALL FA NOTIFICATION DEVICES PER NFPA 72. MOUNT VISUAL & COMBINATION NOTIFICATION DEVICES IN CEILING PREFERABLY OR WALL WITH ENTIRE LENS BETWEEN 80" & 96" AFF. SEE ELECTRICAL DETAILS.
- J COORDINATE DETECTORS AND DEVICE LOCATIONS IN FINISHED SPACES WITH ARCHITECTURAL REFLECTED CEILING PLAN (RCP). RELOCATE FIRE ALARM DETECTORS AND DEVICES TO RESOLVE INTERFERENCE AND CONFLICTS. FINAL LOCATION SHALL CONFORM TO NFPA 72 AND UL REQUIREMENTS.


KEYED NOTES - E1.03D

- 1 EXISTING LIGHTING IN THIS SPACE TO REMAIN. CLEAN ALL LENSES AND RELAMP FIXTURE.
- 2 EXISTING LIGHTING IN THIS SPACE TO BE DEMOLISHED. RECONNECT NEW LIGHTING IN DETAIL 2, THIS SHEET TO EXISTING CIRCUIT SERVING LIGHTING IN THE RESTROOM AREA.
- 3 CONNECT RESTROOM LIGHTING TO EXISTING CRITICAL BRANCH POWER CIRCUIT SERVING THIS SPACE. CONNECT TO NEW OR EXISTING SNAP SWITCH FOR CONTROL OF LIGHTING IN EACH SPACE.
- 4 EXISTING ELECTRICAL ROOM.
- 5 CONNECT TO SPARE CIRCUIT BREAKER IN PANEL 3LSTA OR 3LSTB IN ELECTRICAL ROOM NOTED IN NOTE 4 WITH #12, #12G, 3/4" C. THIS WORK IS INCLUDED IN ALTERNATE 3D-02.
- 6 CONNECT TO EXISTING CIRCUIT SERVING POWER TO NURSE STATION.
- 7 EXISTING LIGHT FIXTURE TO BE ROTATED IN CEILING TO NEW LOCATION AS INDICATED. EXISTING CIRCUIT AND LIGHTING CONTROL FOR FIXTURE TO REMAIN.



1 THIRD FLOOR LIGHTING DEMO PLAN - AREA D
1/8" = 1'-0"

2 THIRD FLOOR LIGHTING AREA D
1/8" = 1'-0"

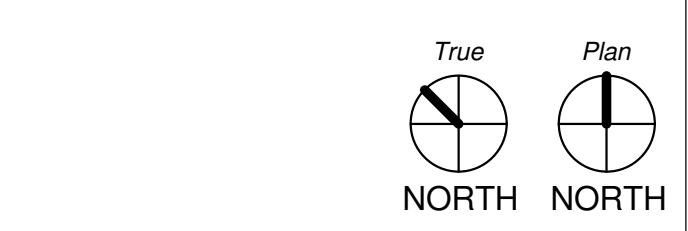


GENERAL NOTES - GE1.03E

- A SEE SHEET E0.01 FOR ELECTRICAL LEGEND, SYMBOLS AND ABBREVIATIONS. COORDINATE WITH ARCHITECT FOR FINAL LUMINAIRE LOCATIONS.
- B ALL EMERGENCY LUMINAIRES AND EXIT LIGHTS ARE TO REMAIN UNSWITCHED, UON.
- C LIGHTED EXIT SIGNS ARE SHOWN FOR QUANTITIES AND GENERAL LOCATIONS. COORDINATE WITH ARCHITECT FOR EXACT LOCATION OF LIGHTED EXIT SIGNS.
- D SINGLE-FACE EXIT SIGNS ARE TYPE XA, UON. DOUBLE-FACE SIGNS ARE TYPE XB, UON.
- E COORDINATE ELECTRICAL WORK WITH ARCHITECTURAL, CIVIL, STRUCTURAL, MECHANICAL, AND PLUMBING SO AS TO AVOID INTERFERENCE WITH OR COMPROMISE OF OTHER SYSTEMS.
- F ALL RECEPTACLES ARE MOUNTED 18" UON. VERIFY HEIGHT AND ALIGNMENT OF DEVICES WITH ARCHITECTURAL DRAWINGS. COORDINATE OUTLET/RECEPTACLE LOCATIONS WITH MILL WORK, CASEWORK, ETC.
- G UPDATE PANELBOARD SCHEDULES UPON COMPLETION OF PROJECT TO REFLECT FINAL CIRCUIT NUMBERS AND DESCRIPTIONS.
- H PROVIDE FIRE ALARM SYSTEM IN COMPLIANCE WITH NFPA 72 FIRE ALARM CODE AND NFPA 101 LIFE SAFETY CODE AND SECTIONS 28 31 00.
- I INSTALL FA NOTIFICATION DEVICES PER NFPA 72. MOUNT VISUAL & COMBINATION NOTIFICATION DEVICES IN CEILING PREFERABLY OR WALL WITH ENTIRE LENS BETWEEN 80" & 96" AFF. SEE ELECTRICAL DETAILS.
- J COORDINATE DETECTORS AND DEVICE LOCATIONS IN FINISHED SPACES WITH ARCHITECTURAL REFLECTED CEILING PLAN (RCP). RELOCATE FIRE ALARM DETECTORS AND DEVICES TO RESOLVE INTERFERENCE AND CONFLICTS. FINAL LOCATION SHALL CONFORM TO NFPA 72 AND UL REQUIREMENTS.

KEYED NOTES - E1.03E

- 1 EXISTING LIGHTING IN THIS SPACE TO REMAIN. CLEAN ALL LENSES AND RELAMP FIXTURE.
- 2 EXISTING LIGHTING IN THIS SPACE TO BE DEMOLISHED. RECONNECT NEW LIGHTING IN DETAIL 2, THIS SHEET TO EXISTING CIRCUIT SERVING LIGHTING IN THE RESTROOM AREA.
- 3 CONNECT RESTROOM LIGHTING TO EXISTING CRITICAL BRANCH POWER CIRCUIT SERVING THIS SPACE. CONNECT TO NEW OR EXISTING SNAP SWITCH FOR CONTROL OF LIGHTING IN EACH SPACE.
- 4 EXISTING ELECTRICAL ROOM.
- 5 CONNECT TO SPARE CIRCUIT BREAKER IN PANEL 3LSTA OR 3LSTB IN ELECTRICAL ROOM NOTED IN NOTE 4 WITH 2#12, #12G, 3/4" C. THIS WORK IS INCLUDED IN ALTERNATE 3E-02.
- 6 CONNECT TO EXISTING CIRCUIT SERVING POWER TO NURSE STATION.

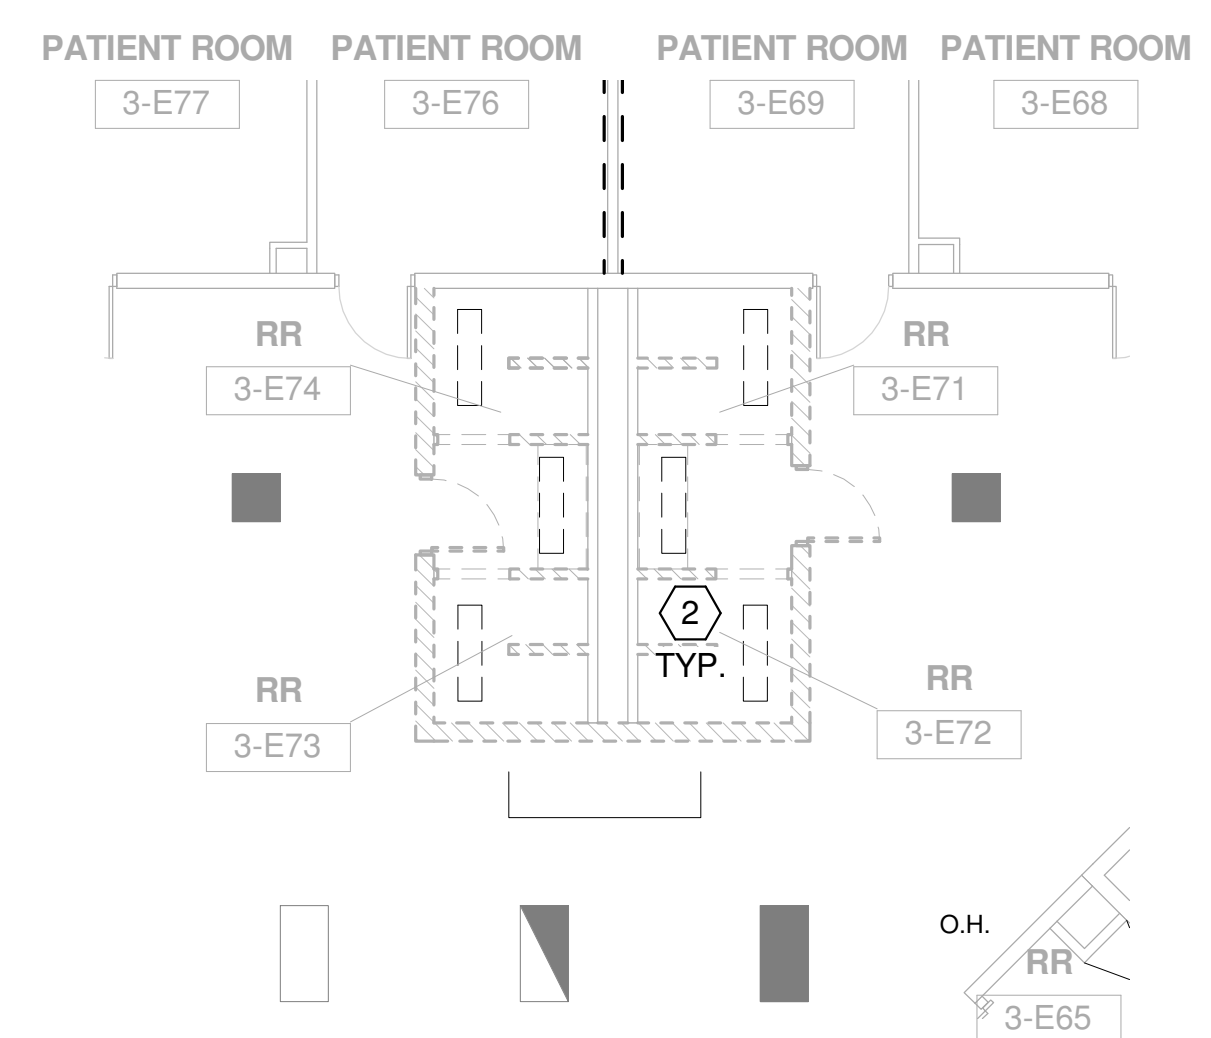


1 THIRD FLOOR LIGHTING DEMO PLAN - AREA E
 1/8" = 1'-0"



2 THIRD FLOOR LIGHTING AREA E
 1/8" = 1'-0"

NOT IN SCOPE

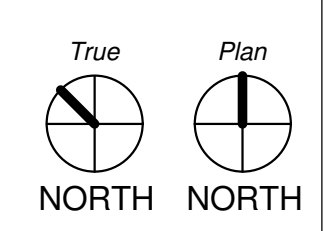

KEYED NOTES - PD2.01C


- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DOW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.

GENERAL NOTES


- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.



**FIRST FLOOR - AREA C
 DEMOLITION PLAN**
 1/4" = 1'-0"

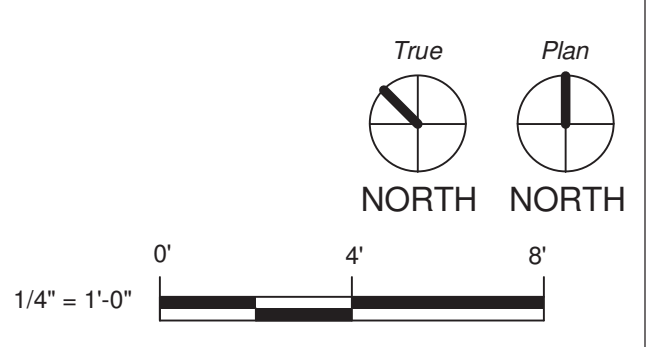

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATIONS UNITS
 1C, 2E, 3B, 3C, 3D & 3E**

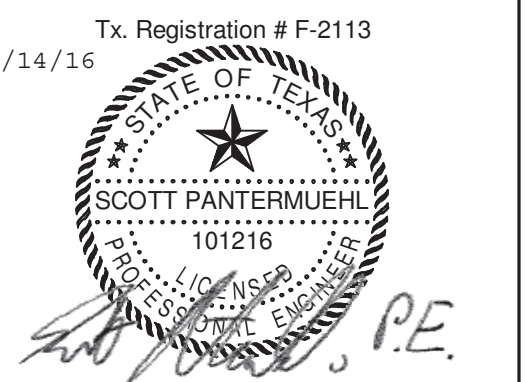

CLIENT
 UT HEALTH
 PROJECT NUMBER
 16103
 DATE: October 14, 2016
 DRAWN BY: CH
 CHECKED BY: CH

No.	Description	Date

ISSUE FOR CONSTRUCTION

**SECOND FLOOR
 PLUMBING
 DEMOLITION PLAN -
 AREA E**

PD2.02E

KEYED NOTES - PD2.02E


- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DCW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.
- 5 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL FOR FUTURE CONNECTION.
- 6 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. CAP DOMESTIC WATER SUPPLY LINE IN CHASE FOR FUTURE CONNECTION. PROVIDE 4" SANITARY CONNECTION IN CHASE AND CAP LINE FOR FUTURE WATER CLOSET CONNECTION.
- 7 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DCW AND DHW PIPING AND CAP IN CHASE FOR FUTURE CONNECTION.

GENERAL NOTES


- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.



**SECOND FLOOR - AREA E
 DEMOLITION PLAN**
 1/4" = 1'-0"

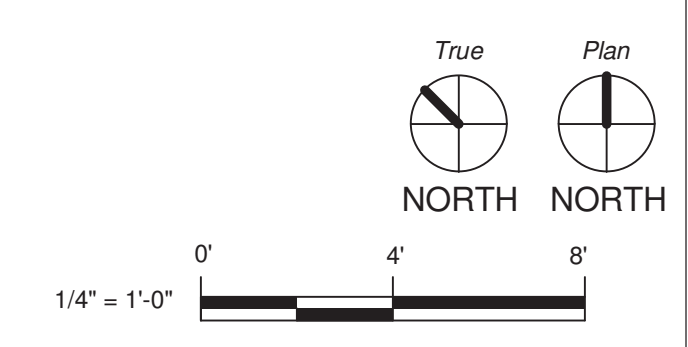

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATIONS UNITS
 1C, 2E, 3B, 3C, 3D & 3E**

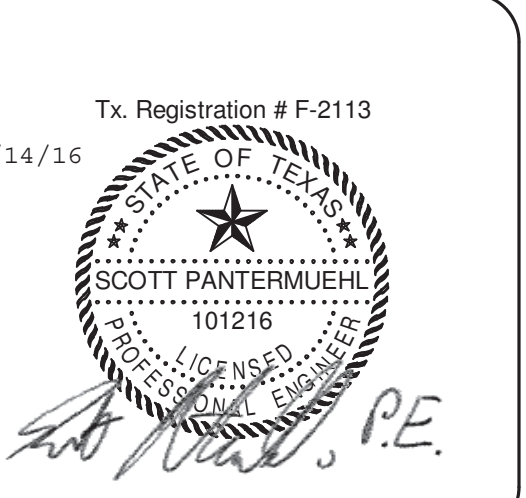

CLIENT	UT HEALTH	
PROJECT NUMBER	16103	
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
 PLUMBING
 DEMOLITION PLAN -
 AREA B**

PD2.03B

KEYED NOTES - PD2.03B

- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DOW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.


GENERAL NOTES

- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.




**THIRD FLOOR - AREA B
 DEMOLITION PLAN**

1/4" = 1'-0"

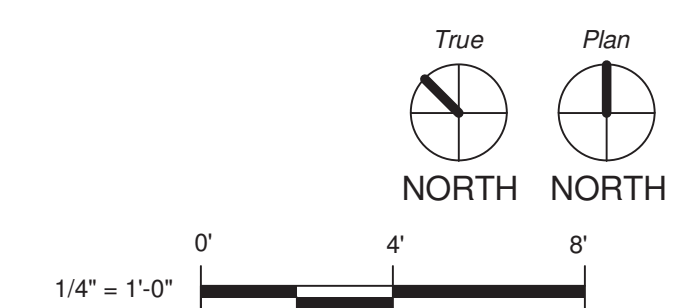

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATIONS UNITS
 1C, 2E, 3B, 3C, 3D & 3E**

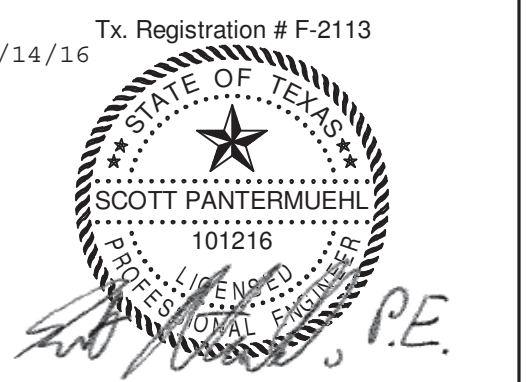

CLIENT UT HEALTH		
PROJECT NUMBER 16103		
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
 PLUMBING
 DEMOLITION PLAN -
 AREA C**

PD2.03C

KEYED NOTES - PD2.03C


- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DCW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.

GENERAL NOTES


- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.



**THIRD FLOOR - AREA C
 DEMOLITION PLAN**
 1/4" = 1'-0"

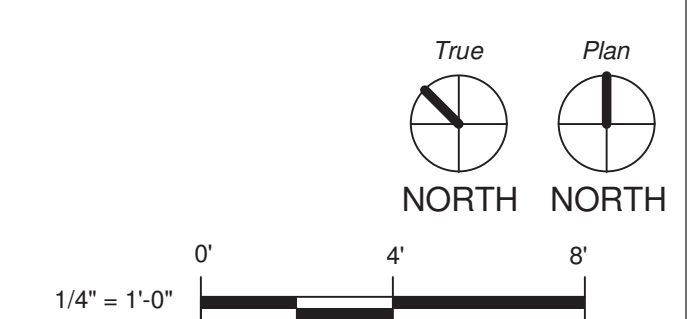

**HARRIS COUNTY PSYCHIATRIC
CENTER RENOVATIONS UNITS
1C, 2E, 3B, 3C, 3D & 3E**

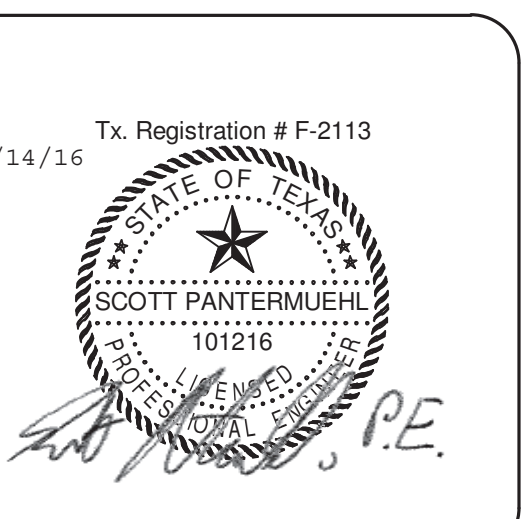

CLIENT		
UT HEALTH		
PROJECT NUMBER		
16103		
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
PLUMBING
DEMOLITION PLAN -
AREA D**

PD2.03D

KEYED NOTES - PD2.03D


- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DCW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.
- 5 REMOVE EXISTING SINK AND FAUCET. DCW, DHW AND SANITARY LINES TO BE CAPPED AT WALL FOR CONNECTION TO NEW FIXTURE. REFER TO RENOVATION PLAN P2.03D FOR NEW SINK AND TRIM.

GENERAL NOTES

- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.



**THIRD FLOOR - AREA D
DEMOLITION PLAN**
1/4" = 1'-0"

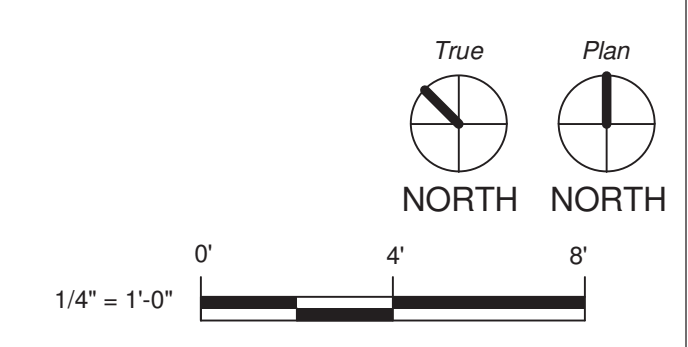

KEYED NOTES - PD2.03E

- 1 REMOVE EXISTING LAVATORY AND LAVATORY TRIM AND ASSOCIATED PLUMBING. CAP SANITARY LINE AND WATER PIPING AND CONCEAL IN WALL.
- 2 REMOVE EXISTING FLOOR MOUNTED WATER CLOSET. CAP SANITARY WASTE BELOW SLAB AND FILL VOID IN FLOOR WITH CONCRETE. MATCH EXISTING SLAB THICKNESS AND FINISH. REFER TO RENOVATION DRAWING P2.01C FOR NEW WATER CLOSET WITH WALL OUTLET.
- 3 REMOVE EXISTING SHOWER HEAD AND TRIM. REMOVE DCW AND DHW PIPING AND CAP ABOVE CEILING FOR CONNECTION TO NEW FIXTURE.
- 4 REMOVE EXISTING BATHTUB.



GENERAL NOTES

- A. PLUMBING ITEMS SHOWN LIGHT ARE EXISTING TO REMAIN. ITEMS SHOWN BOLD ARE TO BE REMOVED.
- B. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- C. COORDINATE DOWNTIME OF SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.



**THIRD FLOOR - AREA E
DEMOLITION PLAN**

1/4" = 1'-0"

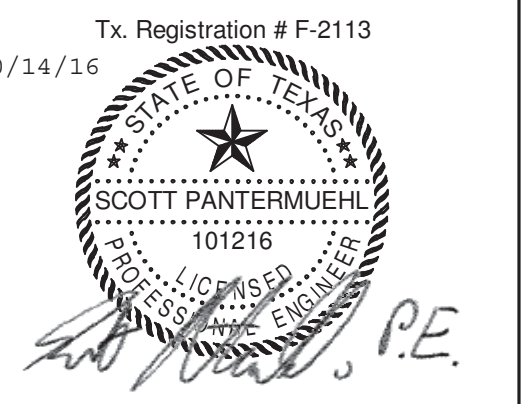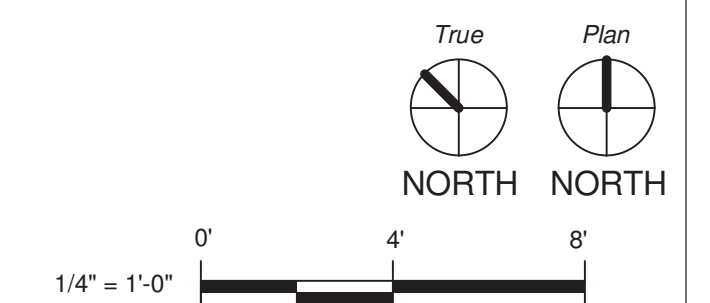

CLIENT UT HEALTH		
PROJECT NUMBER 16103		
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
PLUMBING
DEMOLITION PLAN -
AREA E**

PD2.03E

No.	Description	Date

ISSUE FOR CONSTRUCTION

**FIRST FLOOR
 PLUMBING
 RENOVATION PLAN -
 AREA C**

P2.01C

KEYED NOTES - P2.01C

- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS, INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.


GENERAL NOTES

- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT. REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERATURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



FIRST FLOOR RENOVATION - AREA

1C
 1/4" = 1'-0"

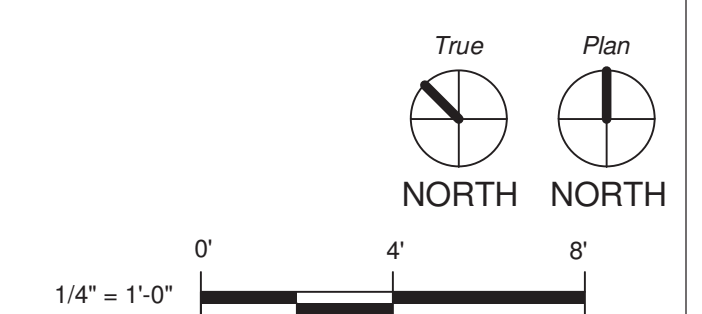

KEYED NOTES - P2.02E


- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS. INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS. FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.

GENERAL NOTES

- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT. REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERANTURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



**SECOND FLOOR RENOVATION -
AREA E**
1/4" = 1'-0"

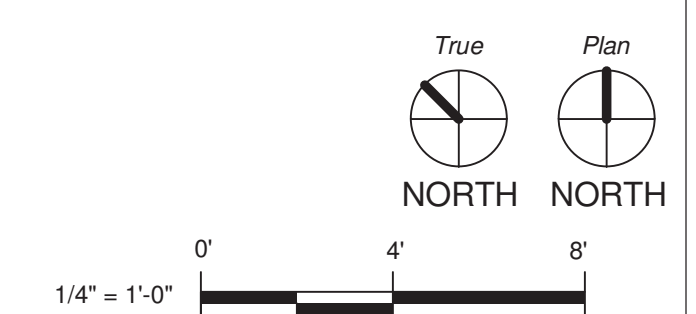

**HARRIS COUNTY PSYCHIATRIC
 CENTER RENOVATIONS UNITS
 1C, 2E, 3B, 3C, 3D & 3E**



KEYED NOTES - P2.03B

- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS, INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.

GENERAL NOTES



- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT. REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERATURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



THIRD FLOOR RENOVATION -

AREA B

1/4" = 1'-0"

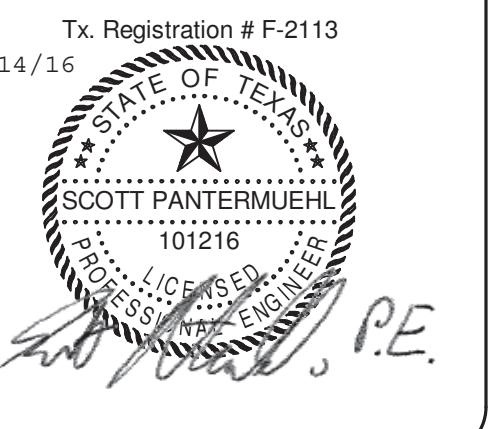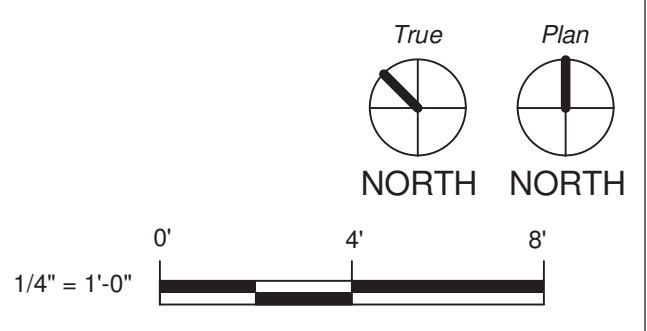

CLIENT UT HEALTH		
PROJECT NUMBER 16103		
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
 PLUMBING
 RENOVATION PLAN -
 AREA B**

P2.03B

KEYED NOTES - P2.03C


- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS, INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.

GENERAL NOTES

- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT. REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERATURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



**THIRD FLOOR RENOVATION -
AREA C**
1
1/4" = 1'-0"

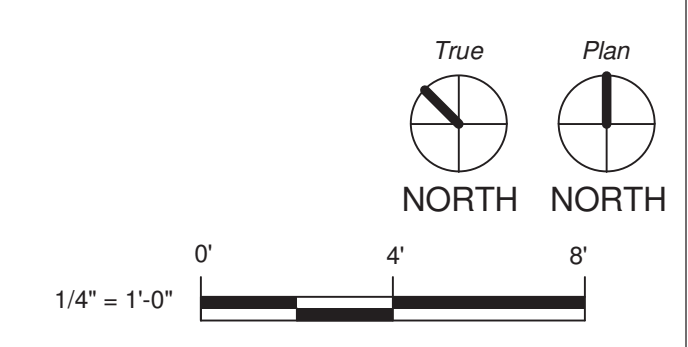

KEYED NOTES - P2.03D

- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS. INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS. FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 6 PROVIDE NEW SINK AND FAUCET/TRIM. CONNECT TO EXISTING 1/2" DCW, 1/2" DHW AND 2" SANITARY LINES FROM EXISTING FIXTURE.



GENERAL NOTES

- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT, REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERATURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



**THIRD FLOOR RENOVATION -
AREA D**

1
1/4" = 1'-0"

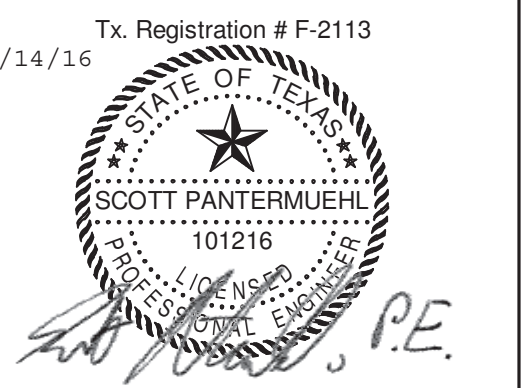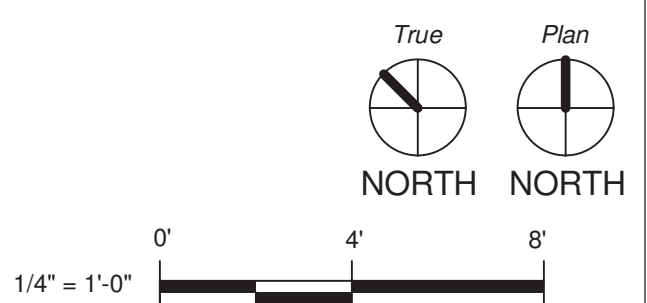

CLIENT	UT HEALTH	
PROJECT NUMBER	16103	
DATE:	October 14, 2016	
DRAWN BY:	CH	
CHECKED BY:	CH	
REVISIONS		
No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
PLUMBING
RENOVATION PLAN -
AREA D**

P2.03D

No.	Description	Date

ISSUE FOR CONSTRUCTION

**THIRD FLOOR
 PLUMBING
 RENOVATION PLAN -
 AREA E**

P2.03E

KEYED NOTES - P2.03E

- 1 PROVIDE NEW LAVATORY WITH WALL MOUNTED SENSOR FAUCET. CONNECT 1/2" DCW AND DHW TO EXISTING DCW AND DHW IN WALL. CONNECT TO EXISTING WASTE AND VENT IN WALL.
- 2 REWORK EXISTING WASTE AND VENT PIPING TO CONNECT TO NEW WATER CLOSET WITH BACK OUTLET. CONNECT 1 1/4" DCW TO EXISTING DCW IN WALL. 4" WASTE THRU WALL AND DOWN TO EXISTING SANITARY LINE.
- 3 PROVIDE 1/2" DCW AND 1/2" DHW TO NEW SHOWER. 2" WASTE WITH P-TRAP FROM FLOOR DRAIN AND CONNECT TO EXISTING SANITARY BELOW SLAB.
- 4 REWORK AND REPLACE EXISTING WET AUTOMATIC SPRINKLER HEADS WHERE RENOVATION WORK OCCURS WITH PENDANT TYPE, QUICK RESPONSE SPRINKLER HEADS, INSTITUTIONAL TYPE, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.
- 5 REWORK AND REPLACE EXISTING SPRINKLER HEADS WHERE NECESSARY WITH CONCEALED TYPE QUICK RESPONSE SPRINKLER HEADS, FOR LIGHT HAZARD OCCUPANCY AS OUTLINED IN NFPA 13 AND THE SPECIFICATIONS.

GENERAL NOTES

- A. FIELD VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- B. COORDINATE THE DOWNTIME OF EXISTING SYSTEMS WITH THE OWNER PRIOR TO BEGINNING WORK.
- C. THE FLOOR IS CURRENTLY ENTIRELY PROTECTED BY A WET AUTOMATIC SPRINKLER SYSTEM. WHERE NEW SPRINKLER WORK IS INDICATED, THE EXISTING SPRINKLER HEADS SHALL BE REMOVED AND REPLACED WITH NEW SPRINKLER HEADS AS NOTED. REWORK EXISTING SPRINKLER HEADS TO MATCH NEW ARCHITECTURAL LAYOUT. REFER TO ARCHITECTURE REFLECTED CEILING PLAN FOR COORDINATION WITH LIGHTING AND EXTENT OF CEILING RENOVATION SCOPE OF WORK.
- D. FOR PROTECTION DURING CONSTRUCTION, TURN EXISTING FIRE SPRINKLER HEADS UP WHEN CEILINGS ARE REMOVED AND REPLACE EXISTING SPRINKLER HEADS WITH NEW UPRIGHT PENDANT FAST-RESPONSE SPRINKLER HEADS. TURN EXISTING FIRE SPRINKLER HEAD DROPS BACK DOWN FOR FINAL INSTALLATION WHEN NEW CEILINGS ARE INSTALLED AND REPLACE PENDANT SPRINKLER HEADS WITH NEW CONCEALED FAST-RESPONSE SPRINKLER HEADS IN COMMON AREAS AND NEW SECURITY TYPE FAST-RESPONSE SPRINKLER HEADS IN PATIENT ROOMS AND OTHER SECURE AREAS AS NOTED ON THE DRAWINGS.
- E. REFER TO THE SPECIFICATIONS FOR SPRINKLER HEAD ORIFICE SIZES, TEMPERATURE RATINGS, FINISH ETC.
- F. CLEAN AND RELOCATE EXISTING FLOOR DRAINS ON AN AS NEEDED BASIS TO PROVIDE SUFFICIENT SLOPE FOR POSITIVE DRAINAGE.



**THIRD FLOOR RENOVATION -
 AREA E**

1/4" = 1'-0"

